

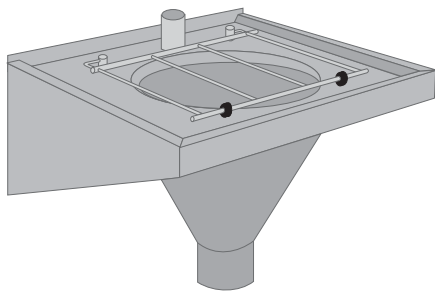
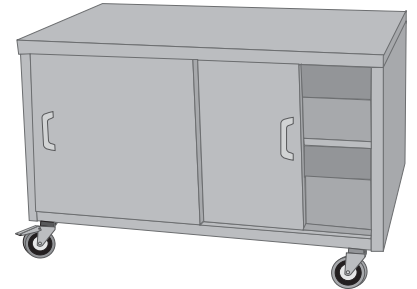

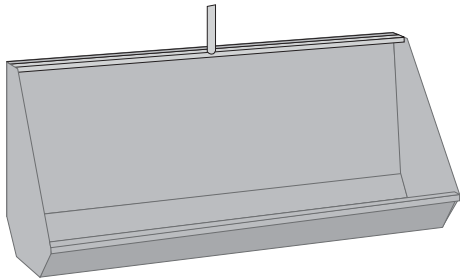

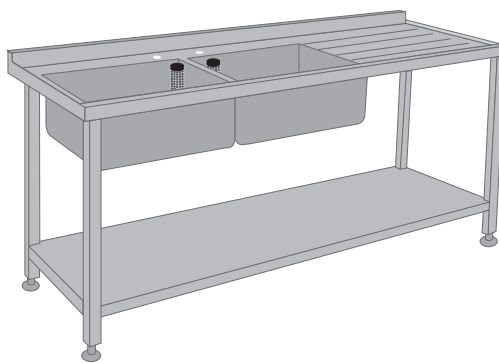


# MG Stainless Limited

Units 1 & 2, Shaw Road, Netherton, DUDLEY, DY2 8TS

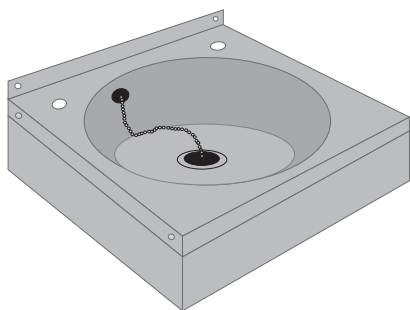

Stainless steel  
sanitaryware,  
washroom and  
catering equipment



**Sales Contact: Martin Gillett**

Telephone: 01384 232175 Facsimile: 01384 232177 Mobile: 07970 938010

Website: [www.mgstainless.co.uk](http://www.mgstainless.co.uk) E Mail: [mail@mgstainless.co.uk](mailto:mail@mgstainless.co.uk)

<b>General information</b>	Page 3		
<b>Urinals</b>	Page 4		
Wall Mounted Trough Urinal	5		
Floor Recessed Slab Urinal	6		
Floor Standing Slab Urinal	7		
Floor Standing Trough Urinal	8		
Bowl Urinal			
<b>WC Pans / Suites</b>			
Pedestal WC Pans	9		
Shrouded WC Pans	10		
Wall Mounted WC Pan	11		
Close Coupled WC Suite	11		
Disabled WC Pan	12		
Rear Panelled WC Suite	13		
Squatting WC Pan	13		
<b>Washtroughs/Washfountains</b>			
Contract Washtrough	14		
Taplanding Washtrough	14		
Splashback Washtrough	15		
Island Washtrough	15		
Washfountains	16		
<b>Drinking Fountains</b>			
Standard Drinking Fountain	17		
Shrouded Drinking Fountain	17		
Inset Drinking Fountain	18		
Pedestal Drinking Fountain	18		
Wall-recessed Drinking Fountain	18a		
<b>Basins</b>			
Standard Basin	19		
Small Basin	19		
Mini Basin	19		
Corner Basin	20		
Circular Inset Basin	20		
Wall Recessed Basin	20		
<b>Inset Basin &amp; Bowls</b>			
Oval Inset Basin	20a		
Oval Inset Vanity Bowl	20a		
Inset Sink Bowls	20a		
<b>Inset Bowls</b>			
Vanity Bowls	21		
Circular Inset Bowls	21		
Square Inset Bowl	21		
Rectangular Inset Bowl	21		
<b>Bucket / Utility Sinks</b>			
Bucket Sinks	22		
Utility Sinks	22		
<b>Janitorial Units</b>	22a		
<b>Shower Trays / Cubicles</b>			
Floor Recessed Shower Tray	23		
Floor Standing Shower Tray	23		
Shower Cubicles	24		
<b>Hospital Equipment</b>			
Taplanding Scrub-upTrough	25		
<b>Hospital Equipment (continued)</b>		Page 25	
Splashback Scrub-up Trough		26	
Standard Scrub-up Trough		26	
Combined Sink/Slop Hopper		27	
Combined Slop Hopper/Drainer		27	
Wall Mounted Slop Hopper		27a	
Floor Standing Slop Hoppe		27a	
Janitorial Unitr		28	
Hospital Sinks		28	
Plaster Sink		28	
<b>Vanitory Units</b>			
Vanitory Units and Tops		29	
<b>Inset Sink Bowls</b>			
Inset Sink Bowls		30	
<b>Ice Sinks</b>			
Ice Sink Units		31	
Single Inset Ice Sink		31	
Double Inset Ice Sink		31	
<b>Sinks</b>			
Mini Sink Units		32	
Standard Sink Units		33	
Standard Sink Units (continued)		34	
Large Sink Units		35	
Large Sink Units (continued)		36	
Hot Rinse Sink Units		37	
<b>Tables / Shelves</b>			
Centre Table		38	
Wall Table		38	
Wall Shelf		38	
Microwave Shelf		38	
<b>Cupboards</b>			
Floor Cupboard		39	
Sink Cupboard		39	
Wall Cupboard		39	
<b>Accessories</b>			
Hand Drier		40	
Paper Towel Dispenser		40	
Waste Bin		40	
Napkin Disposal Bin		41	
Toilet Roll Holders		41	
Toilet Tissue Dispenser		41	
Liquid Soap Dispensers		42	
Soap Shelf		42	
Robe Hooks		42	
Stainless Steel Mirrors		42	
<b>Grab Rails</b>			
Standard Grab Rails		43	
Angled Grab Rail		43	
Padded Backrest		43	
Hingedown Grab Rails		44	
Vertical Poles		44	

## Non Standard Products

We are able to manufacture special items, where site conditions or specific requirements preclude the use of standard products or sizes. Please supply us with exact details and a drawing to avoid any mistakes.

## Policy Statement

The Company was founded in 1996 as Midtherm Stainless Limited and re-named MG Stainless Limited in October 2002. We offer a comprehensive range of sanitaryware, washroom and catering equipment, for projects requiring the durability and hygienic properties of stainless steel, manufactured and supplied by skilled and experienced personnel.

Our aim is to provide our customers with quality products and service, promptly, efficiently and competitively. Therefore, as a policy of continual improvement, we reserve the right to alter specifications without prior notice.

## Material Specification

All our standard products are manufactured from grade 304 or grade 430 stainless steel to European Standard EN 10088-2, which is suitable for general use in toilets, washrooms and kitchens, within a normal working environment.

If equipment is to be regularly used for any other purpose, or under abnormal atmospheric conditions, eg. swimming pool, marine, laboratory use etc. grade 316 stainless steel may be more suitable, as it offers greater resistance to corrosive attack from chlorinated water in high ambient humidity, salt and other chemicals.

All grades of stainless steel are affected by a few specific chemicals and acids, so please contact the sales office for advice, if you are unsure of its suitability.

## Installation Advice

Stainless steel fixings should always be used, especially under wet or humid conditions.

If strong acid solutions used for cleaning tiles or masonry, come into contact with stainless steel, rinse off thoroughly with clean water and wipe dry. Hydrochloric or sulphuric acid will attack stainless steel.

Plain carbon steel nails, screws, paint tins, grinding swarf, wire wool etc., left on stainless steel will rust and discolour the surface, giving the impression that the stainless steel is rusting.

Upon completion of installation, remove any debris and clean thoroughly, as recommended in Care and Maintenance.

## Care and Maintenance

Stainless steel should be cleaned with soap or mild detergent and water, using a sponge or cloth, then rinsed with clean water and wiped dry.

If stubborn marks or deposits are allowed to form, use a cream cleaner that is suitable for stainless steel and, if necessary, a nylon pad or brush.

Regular cleaning, once a week, should avoid any problems.

## Warning

If the correct grade of stainless steel is used for its intended purpose, within the correct environment and cleaned correctly, it will not rust or stain and will maintain its original appearance for many years.

If it is not cleaned regularly, dirt and other deposits can build up and discolour the surface of stainless steel and will often resemble rust. However, stubborn marks and deposits can be removed. See Care and Maintenance.

Only use cleaning solutions clearly recommended for use with stainless steel. If in doubt, do not use.




If any liquid containing bleach (sodium hypochlorite) is used on, or accidentally splashed on, stainless steel, a chemical reaction can occur. If it is not rinsed off with clean water and wiped dry, within a few minutes, this reaction causes pitting corrosion of the surface and subsequently rust, which is irreparable.

## U01 - Wall Mounted Trough Urinal

Manufactured from 1.2mm thick grade 304, satin polished stainless steel, with polished end panels (suitable for wall or exposed installation), 38mm white plastic domed waste outlet (in a left, right or central position), white high impact polystyrene cistern and all necessary pipework, clips and fixings, unless ordered otherwise. Available in any length, up to 3000mm, allowing approximately 600mm per person. For lengths in excess of 3000mm or for corner installations, two or more separate urinals should be used, each with their own waste and cistern.

There are two types of flushing arrangements:

- 1/ Top inlet (TI) square spargepipe with exposed cistern.
- 2/ Back inlet (BI) spreaders with concealed cistern.

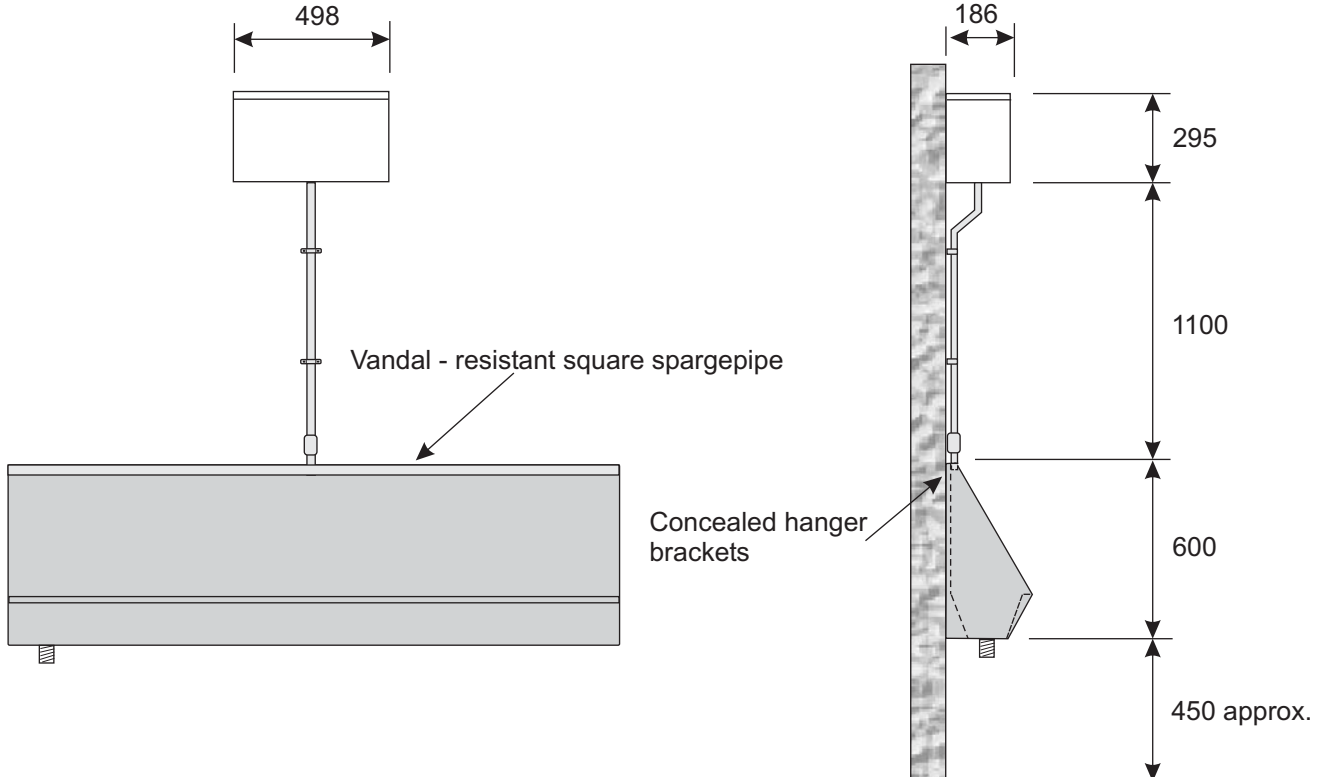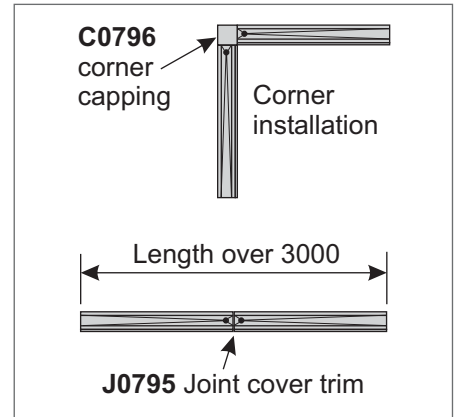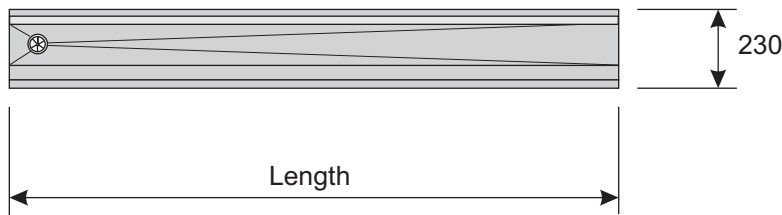

## Optional Extras

- J0795** Joint cover trim
- C0796** Corner capping
- T0000** Trap Shroud

- C0798** Stainless steel automatic cistern
- W1201** 50mm CP brass domed waste
- D0796** Downpipe Shroud




## U03 - Floor Recessed Slab Urinal

Manufactured from 1.2mm thick grade 304, satin polished stainless steel, with polished end panels (suitable for wall or exposed installation), 50mm chromium-plated domed waste outlet (in a left, right or central position, white high impact polystyrene cistern and all necessary pipework, clips and fixings, unless ordered otherwise. Available in any length, up to 3000mm, allowing approximately 600mm per person. For lengths in excess of 3000mm or for corner installations, two or more separate urinals should be used, each with their own waste and cistern.

There are two types of flushing arrangements:

1/ Top inlet (TI) square spargepipe with exposed cistern.

2/ Back inlet (BI) spreaders with concealed cistern.

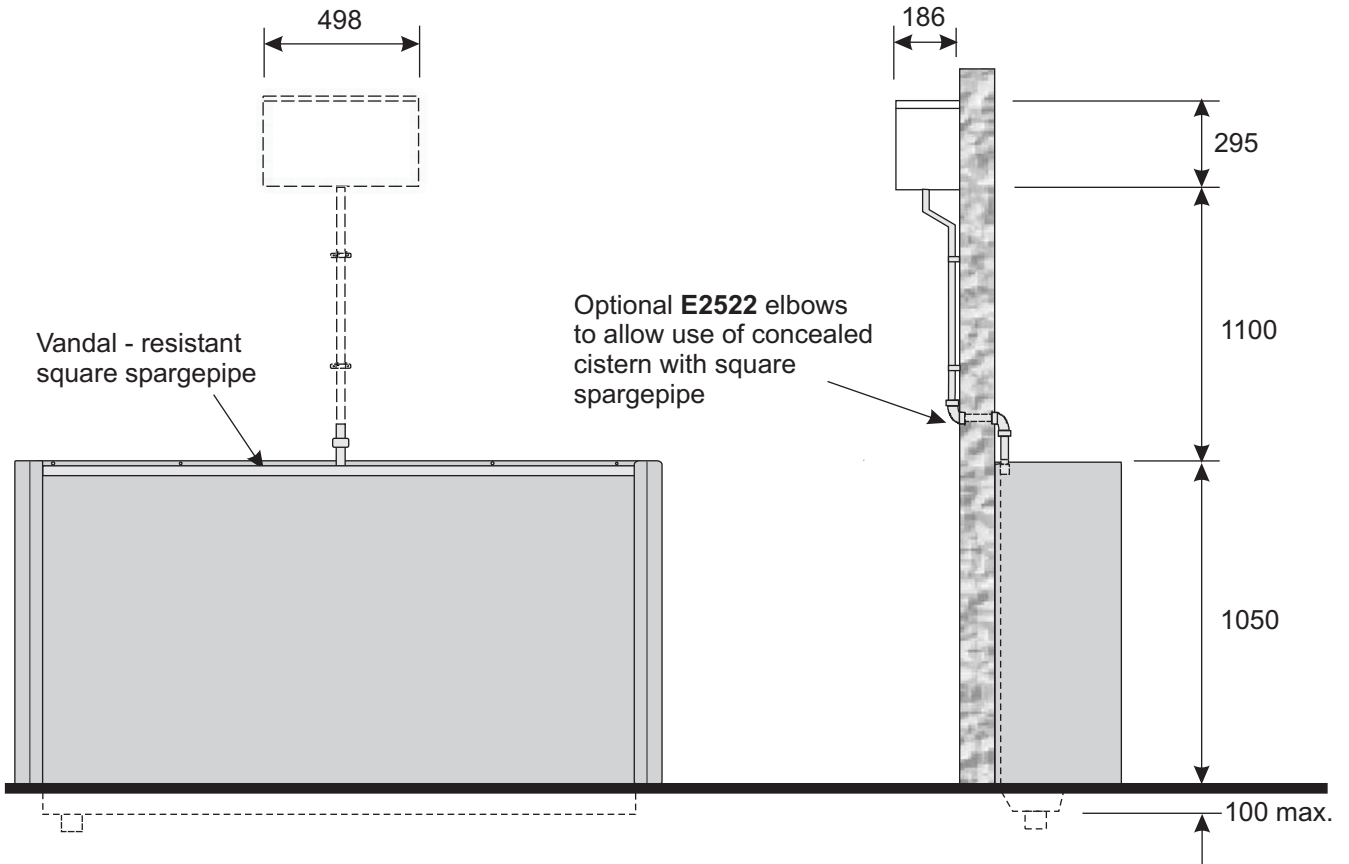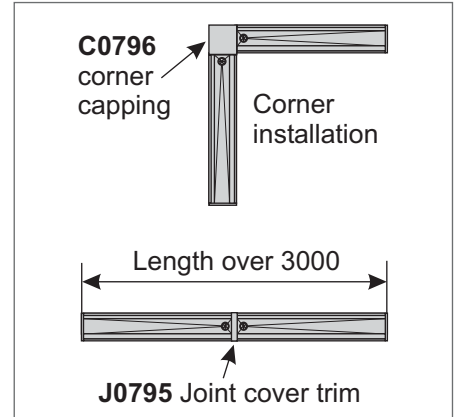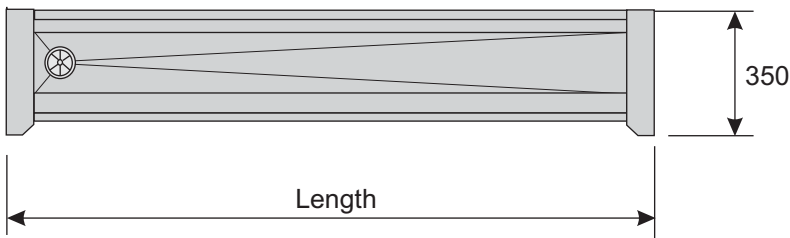

## Optional Extras

**J0795** Joint cover trim  
**C0796** Corner capping




**D0796** Downpipe Shroud  
**C0798** Stainless steel automatic cistern

## U04 - Floor Standing Slab Urinal

Manufactured from 1.2mm thick grade 304, satin polished stainless steel, with polished end panels (suitable for wall or exposed installation), 38mm white plastic domed waste outlet (in a left, right or central position), white high impact polystyrene cistern and all necessary pipework, clips and fixings, unless ordered otherwise. Available in any length, up to 3000mm, allowing approximately 600mm per person. For lengths in excess of 3000mm or for corner installations, two or more separate urinals should be used, each with their own waste and cistern.

There are two types of flushing arrangements:

- 1/ Top inlet (TI) square spargepipe with exposed cistern.
- 2/ Back inlet (BI) spreaders with concealed cistern.

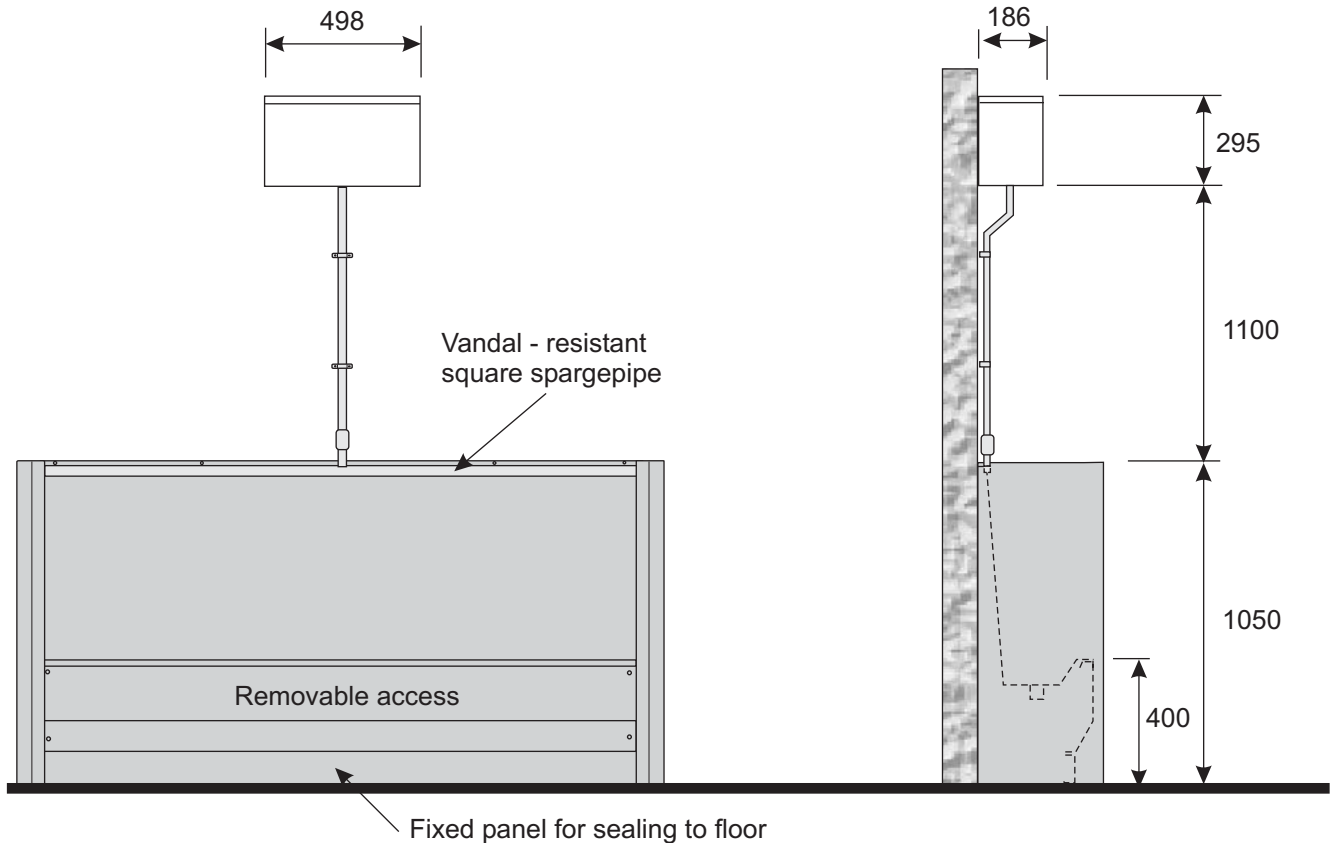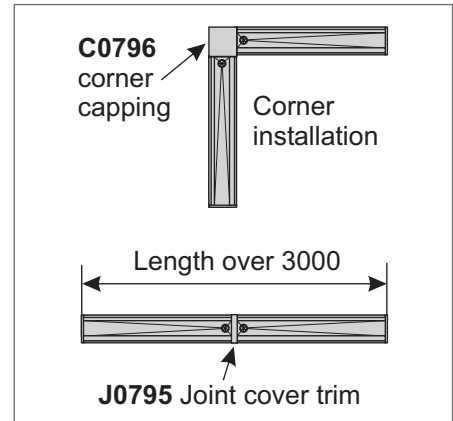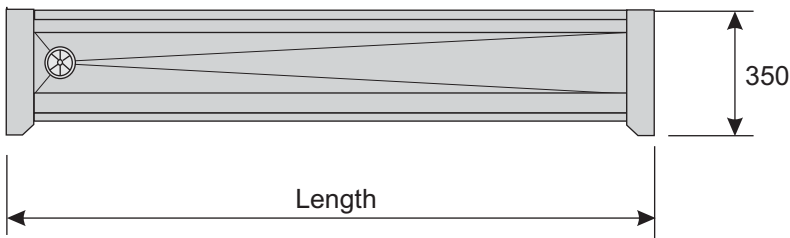

## Optional Extras

- J0795** Joint cover trim
- C0796** Corner capping
- W1102** 50mm CP brass domed waste





- D0796** Downpipe Shroud
- C0798** Stainless steel automatic cistern

## U05 - Floor Standing Trough Urinal

Manufactured from 1.2mm thick grade 304, satin polished stainless steel, with polished end panels (suitable for wall or exposed installation), 38mm white plastic domed waste outlet (in a left, right or central position), white high impact polystyrene cistern and all necessary pipework, clips and fixings, unless ordered otherwise. Available in any length, up to 3000mm, allowing approximately 600mm per person. For lengths in excess of 3000mm or for corner installations, two or more separate urinals should be used, each with their own waste and cistern.

There are two types of flushing arrangements:

- 1/ Top inlet (TI) square spargepipe with exposed cistern.
- 2/ Back inlet (BI) spreaders with concealed cistern.

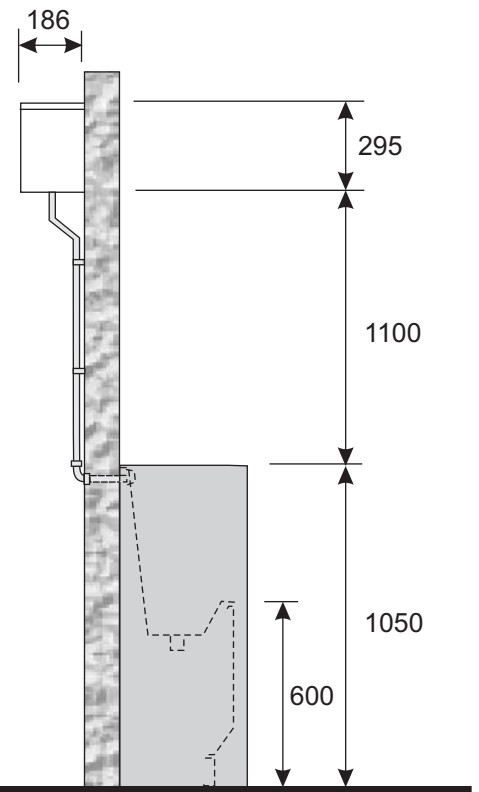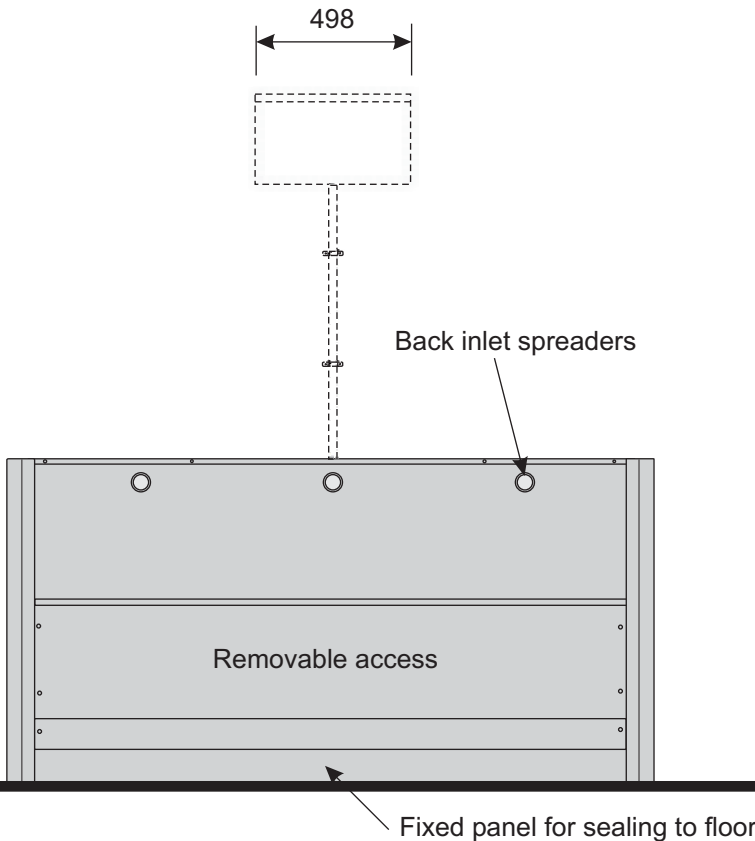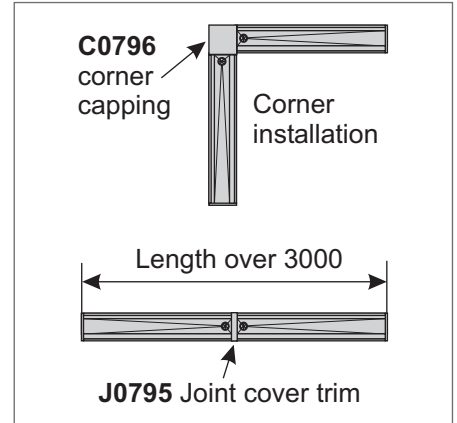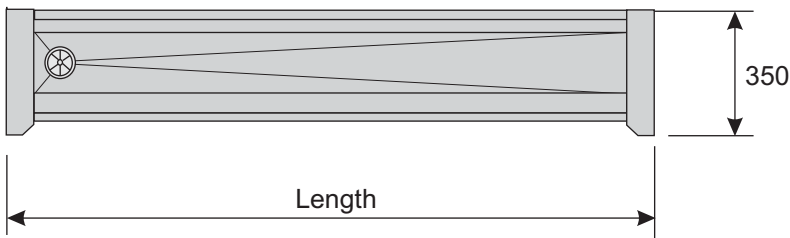

## Optional Extras

- J0795** Joint cover trim
- C0796** Corner capping
- W1102** 50mm CP brass domed waste

- D0796** Downpipe Shroud
- C0798** Stainless steel automatic cistern


## U06 - Bowl Urinal

Manufactured from 1.2mm thick grade 304, satin polished stainless steel, with 38mm white plastic domed waste outlet, white high impact polystyrene cistern and all necessary pipework, clips and fixings.



There are two basic types of flushing arrangements:

1/ Top inlet (TI) spreaders - for exposed cistern.

2/ Back inlet (BI) spreaders - for concealed cistern.

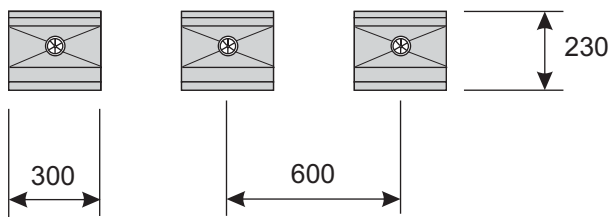

- U0601 - Range of one
- U0602 - Range of two
- U0603 - Range of three
- U0604 - Range of four
- U0605 - Range of five
- U0606 - Range of six

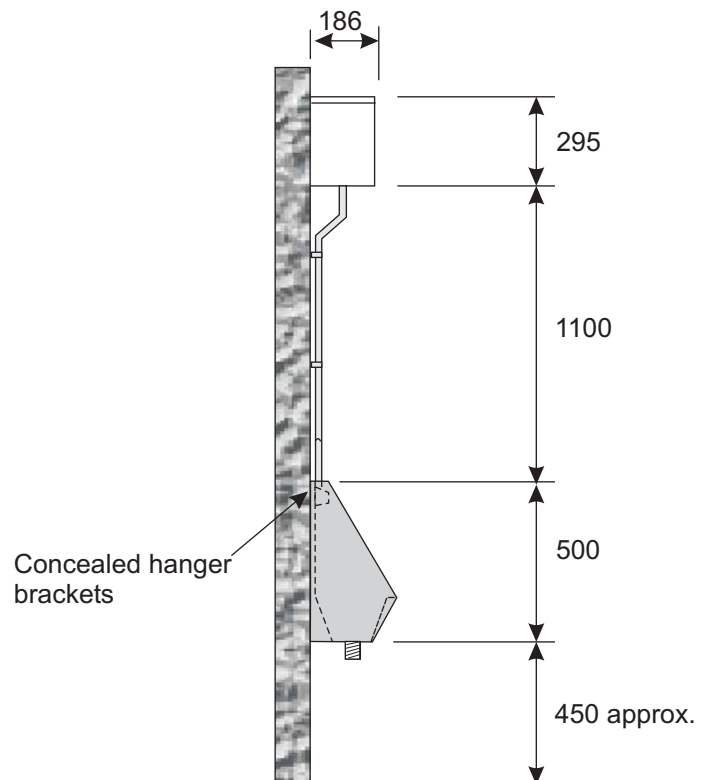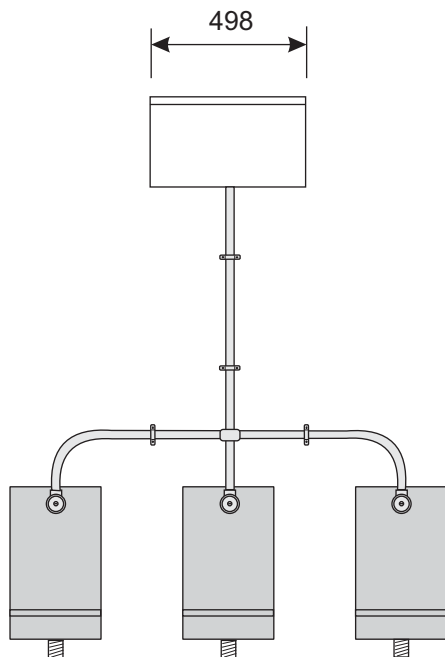

Concealed hanger brackets


## Optional Extras

C0798 Stainless steel automatic cistern

T0000 Trap Shroud


## W1001 - Pedestal WC Pan - P trap C1195 - Low level cistern

The WC pan is manufactured from 1.6 and 2mm thick grade 304, satin polished stainless steel, with security flushing rim, 76/102mm diameter plastic pan connector and 38mm diameter flushpipe connection. The cistern and flushpipe (405x254mm) are manufactured from 1.2mm grade 304, satin polished stainless steel, with 7 litre plastic fittings.

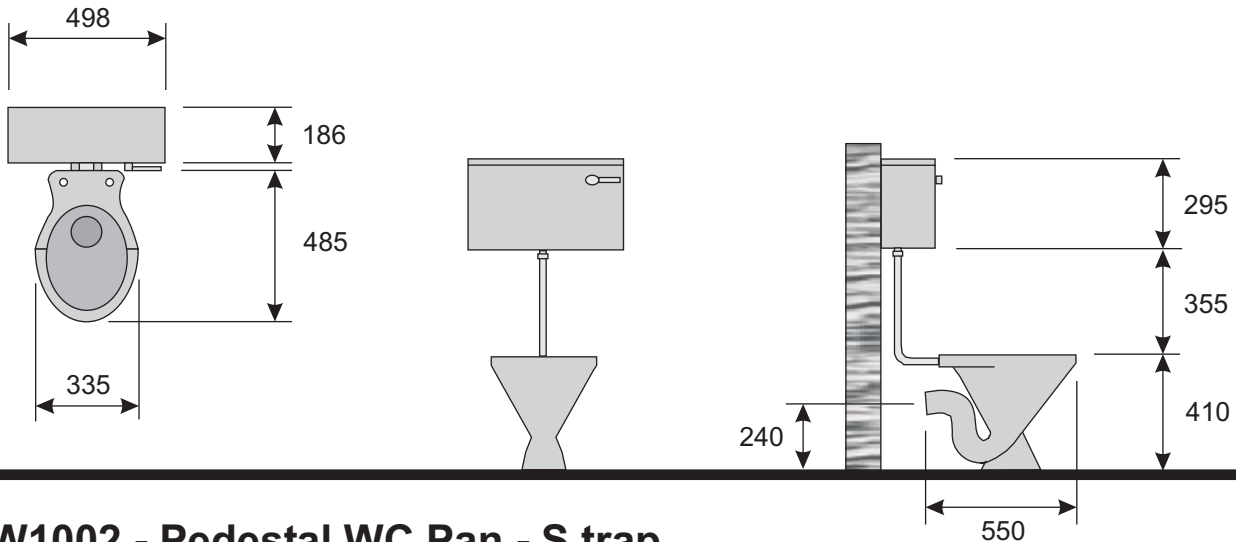

## W1002 - Pedestal WC Pan - S trap C1196 - High level cistern

The WC pan is manufactured from 1.6 and 2mm thick grade 304, satin polished stainless steel, with security flushing rim, 76/102mm diameter plastic pan connector and 38mm diameter flushpipe connection. The cistern and flushpipe (1680x254mm) are manufactured from 1.2mm grade 304, satin polished stainless steel, with 7 litre plastic fittings.

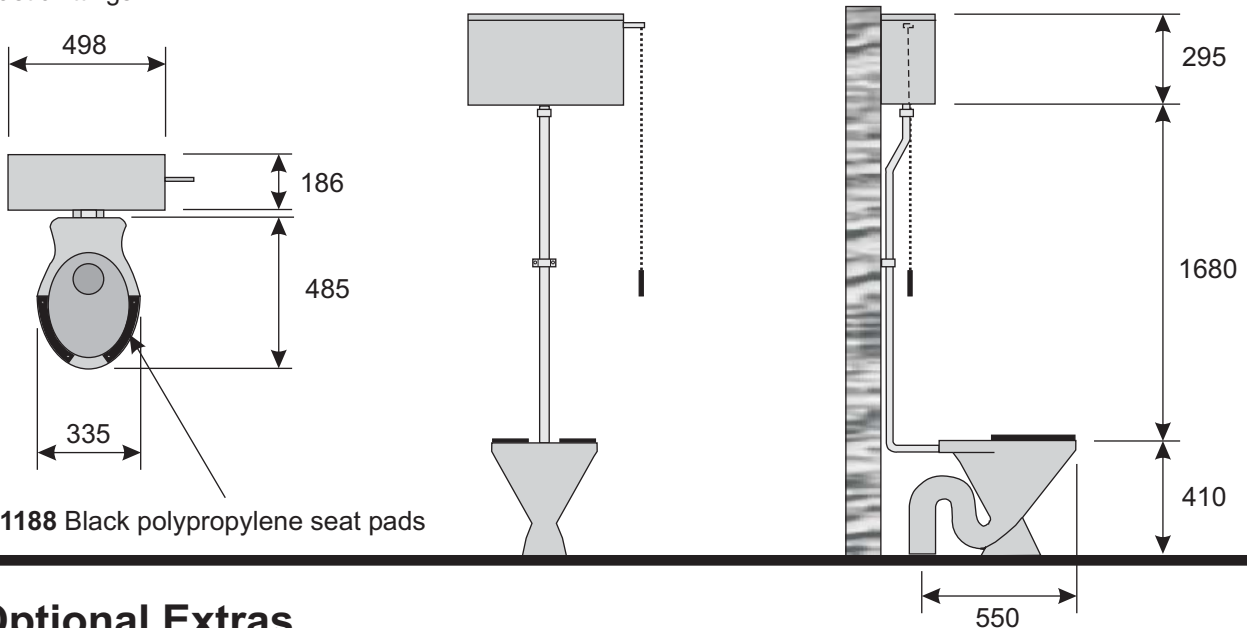

S1188 Black polypropylene seat pads


## Optional Extras

**W1099** Black plastic seat and cover  
**S1187** Stainless steel WC seat hinges  
**D0100** Disabled plinth - 50mm high

**S1188** Black polypropylene seat pads  
**C1197** Disabled cistern lever  
**W103** Stainless steel clad WC Cubicles


## W1003 - Shrouded WC Pan - P trap

Manufactured from 1.6 and 2mm thick grade 304, satin polished stainless steel, with security flushing rim, 76/102mm diameter plastic pan connector, 38mm diameter flushpipe connection and four M8 fixing bolts & angles.

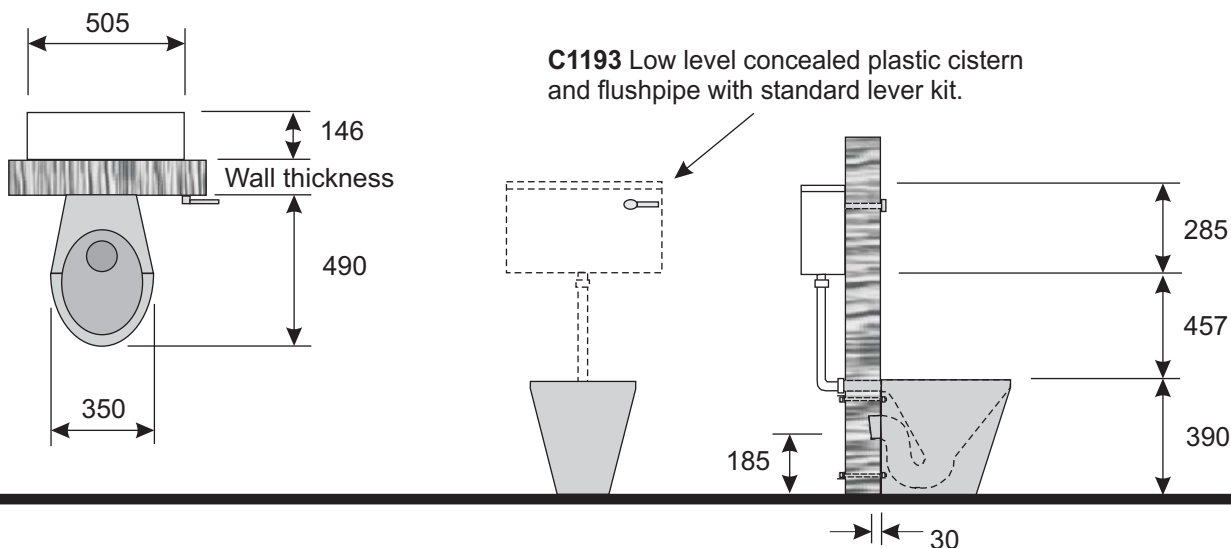

## W1004 - Shrouded WC Pan - S trap

Manufactured from 1.6 and 2mm thick grade 304, satin polished stainless steel, with security flushing rim, 76/102mm diameter plastic pan connector, 38mm diameter flushpipe connection and four M8 fixing bolts & angles.

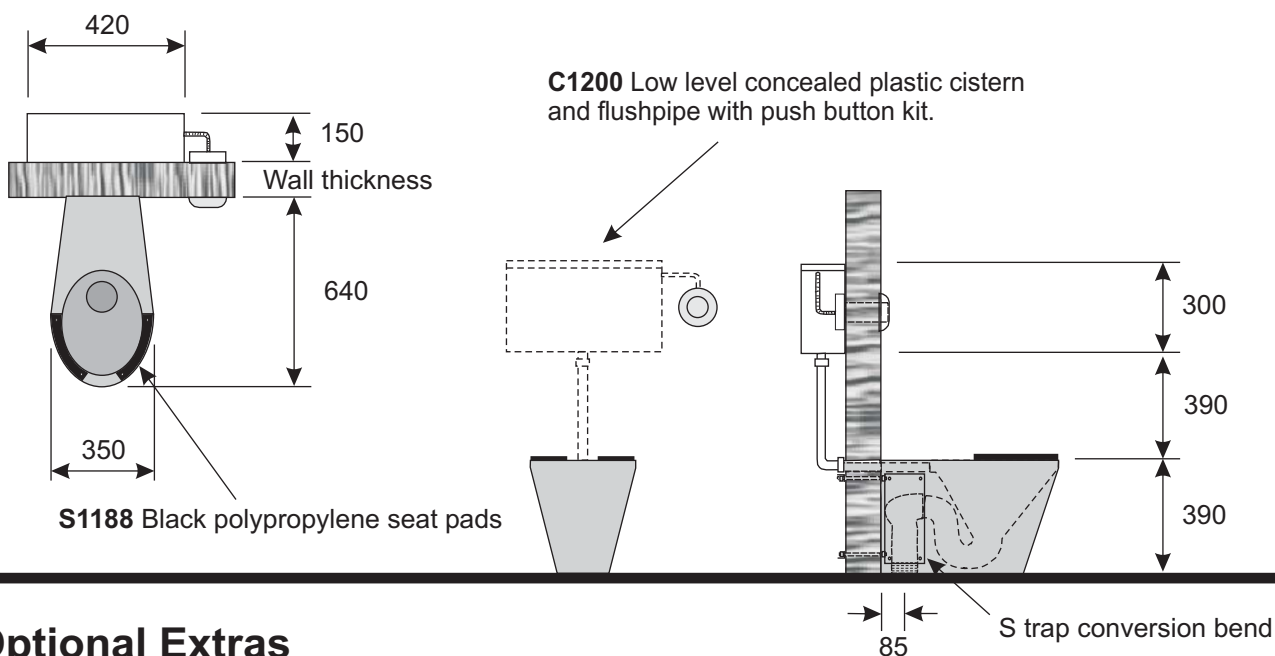


## Optional Extras

- S1188** Black polypropylene seat pads
- W1099** Black plastic seat and cover
- S1187** Stainless steel WC seat hinges
- R1186** Rear extension box (to allow conversion of P trap pan into S trap using plastic conversion bend)
- F1192** Floor or wall fixing flanges

- C1193** Low level concealed plastic cistern and flushpipe with standard lever kit. Please specify wall thickness
- C1200** Low level concealed plastic cistern and flushpipe with pneumatic push button kit. Please specify wall thickness
- W103** Stainless steel clad WC Cubicles


## W1005 - Wall Mounted WC Pan - P trap

Manufactured from 1.6 and 2mm thick grade 304, satin polished stainless steel, with security flushing rim, 76/102mm diameter plastic pan connector, 38mm diameter flushpipe connection, loose backplate and four M8 fixing bolts & angles.

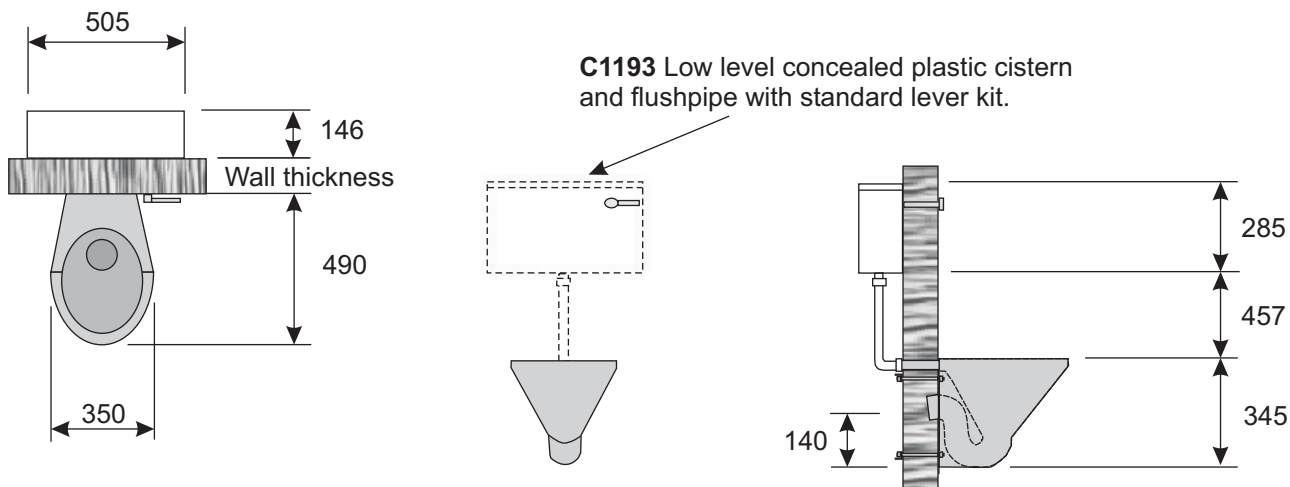

## W1008 - Close Coupled WC Suite - P trap

The pan is manufactured from 1.6 and 2mm thick grade 304, satin polished stainless steel, with security flushing rim, 76/102mm diameter plastic pan connector, 38mm diameter flushpipe connection and four M8 fixing bolts & angles. The cistern is manufactured from 1.2 mm thick grade 304, satin polished stainless steel and is fitted with a recessed push button dual flush and bottom connections for the supply and overflow (unless specified otherwise).

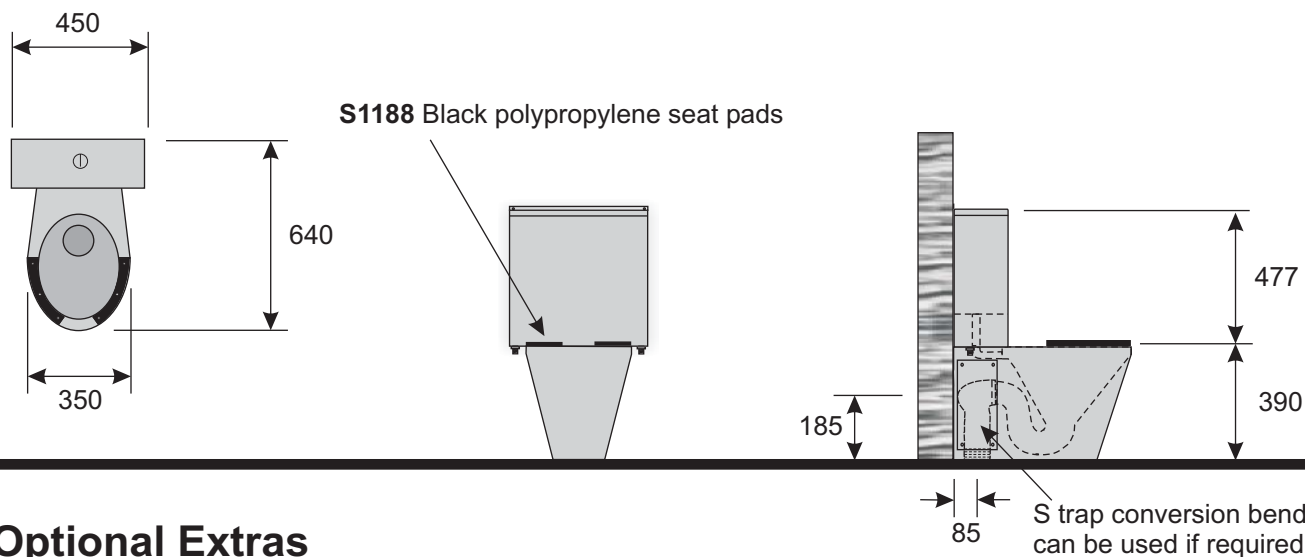


## Optional Extras

- S1188** Black polypropylene seat pads
- W1099** Black plastic seat and cover
- S1187** Stainless steel WC seat hinges
- C1193** Low level concealed plastic cistern and flushpipe with standard lever kit. Please specify wall thickness

- C1200** Low level concealed plastic cistern and flushpipe with pneumatic push button kit. Please specify wall thickness.
- W103** Stainless steel clad WC Cubicles


## W1006 - Disabled WC Pan - P trap

Manufactured from 1.6 and 2mm thick grade 304, satin polished stainless steel, with security flushing rim, 76/102mm diameter plastic pan connector, 38mm diameter flushpipe connection and four M8 fixing bolts & angles.

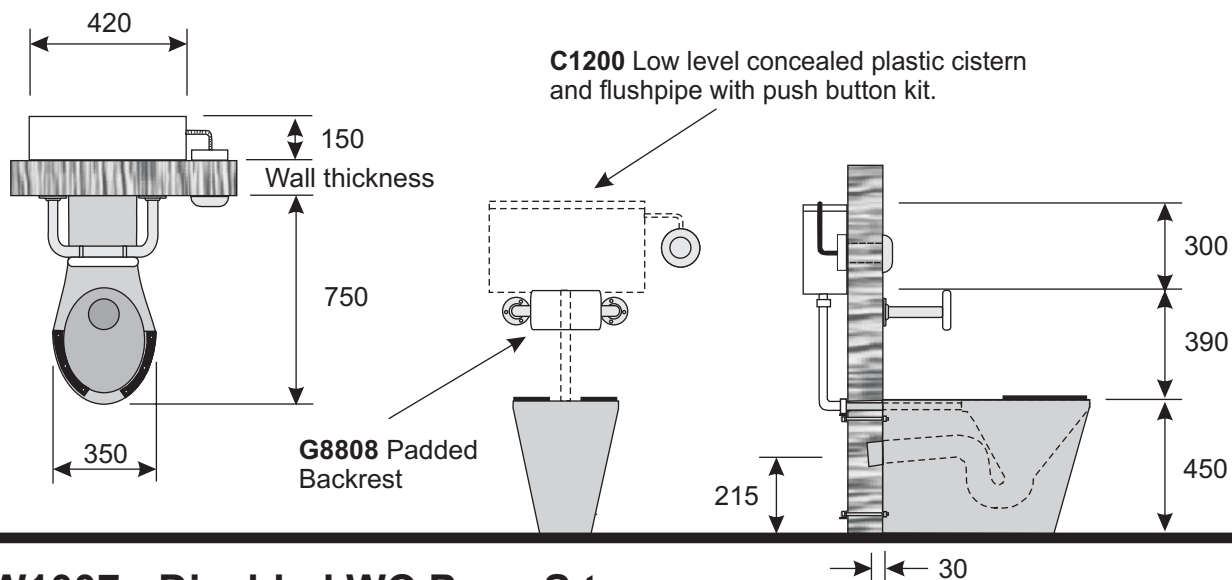

## W1007 - Disabled WC Pan - S trap

Manufactured from 1.6 and 2mm thick grade 304, satin polished stainless steel, with security flushing rim, 76/102mm diameter plastic pan connector, 38mm diameter flushpipe connection and four M8 fixing bolts & angles.

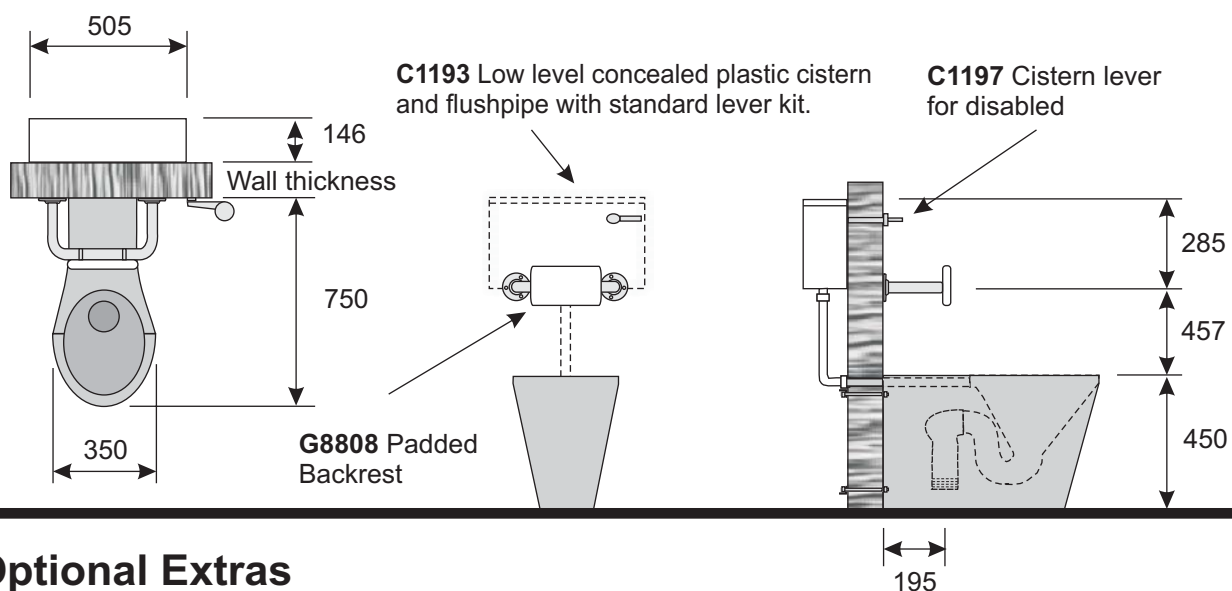


## Optional Extras

- |  |  |
|--|--|
| <ul style="list-style-type: none"> <li><b>S1188</b> Black polypropylene seat pads</li> <li><b>W1099</b> Black plastic seat and cover</li> <li><b>S1187</b> Stainless steel WC seat hinges</li> <li><b>F1192</b> Floor and/or wall fixing flanges</li> <li><b>C1193</b> Low level concealed plastic cistern and flushpipe with standard lever kit. Please specify wall thickness</li> </ul> | <ul style="list-style-type: none"> <li><b>C1193</b> Low level concealed plastic cistern and flushpipe with standard lever kit. Please specify wall thickness</li> <li><b>C1200</b> Low level concealed plastic cistern and flushpipe with pneumatic push button kit. Please specify wall thickness</li> <li><b>C1197</b> Cistern lever for disabled</li> </ul> |
|--|--|


## W1010 - Rear Panelled WC Suite - P trap

The pan is manufactured from 1.6 and 2mm thick grade 304, satin polished stainless steel, with security flushing rim and 76/102mm diameter plastic pan connector (or an S trap plastic conversion bend can be supplied on request) The rear panel is manufactured from 1.2mm thick, satin polished stainless steel and includes a 7.5 litre dual flush cistern and has removable access panels for fixing and making the plumbing connections.

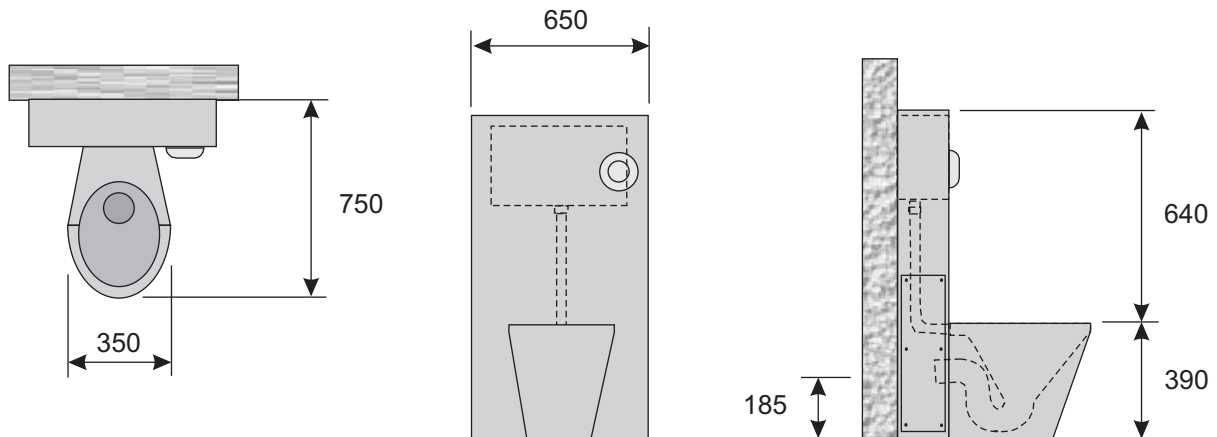

## W1011 - Squatting WC Pan - spigot outlet

Manufactured from 1.6mm thick grade 304, satin polished stainless steel, with 38mm back inlet flushing spreader and 110mm diameter spigot drainage outlet. A high level cistern must be used, at the recommended fixing height of 1700mm.

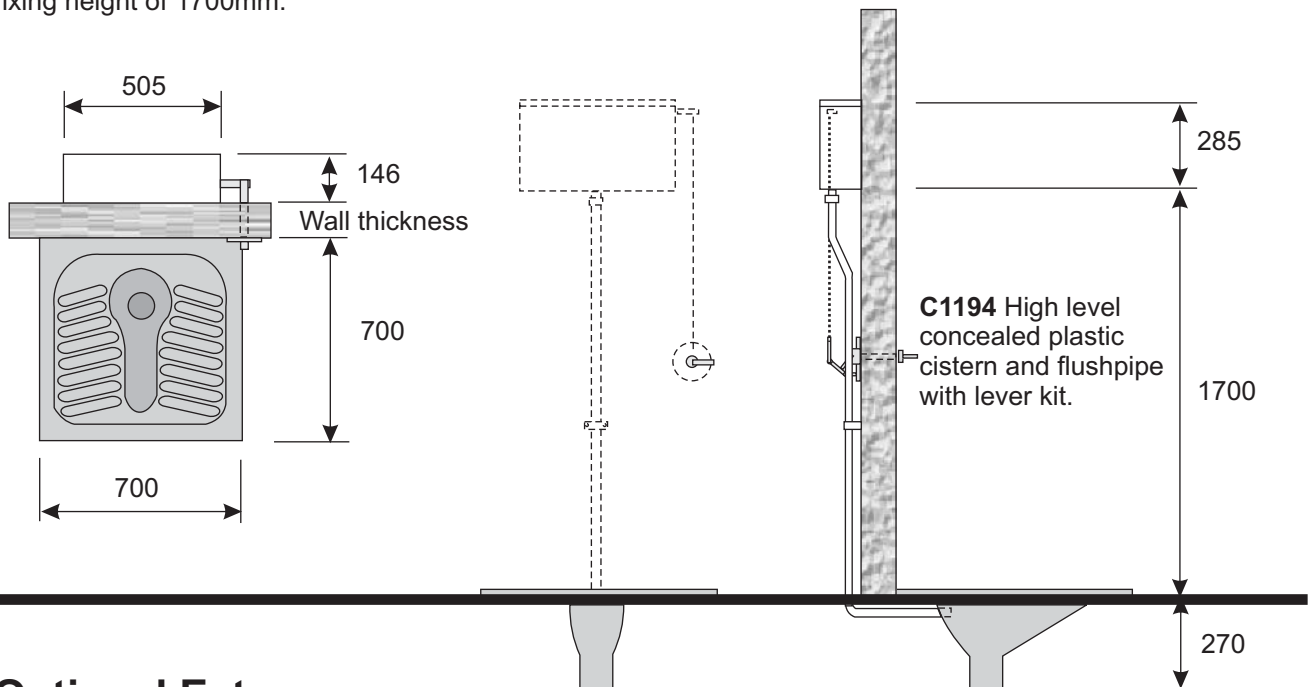


## Optional Extras

- S1188** Black polypropylene seat pads
- W1099** Black plastic seat and cover
- S1187** Stainless steel WC seat hinges
- F1192** Floor and/or wall flanges
- W103** Stainless steel clad WC Cubicles

- C1194** High level concealed plastic cistern and flushpipe with standard lever kit. Please specify wall thickness
- C1200** Low level concealed plastic cistern and flushpipe with pneumatic push button kit. Please specify wall thickness


## W13 - Contract Washtrough

Manufactured from 1.2mm thick grade 304, satin polished stainless steel, supplied with brackets and 38mm plastic grated waste (in a left, right or central position). Suitable for use with wall-mounted taps, using pre-mixed water. Available in any length, up to 3000mm, allowing approximately 600mm per person.

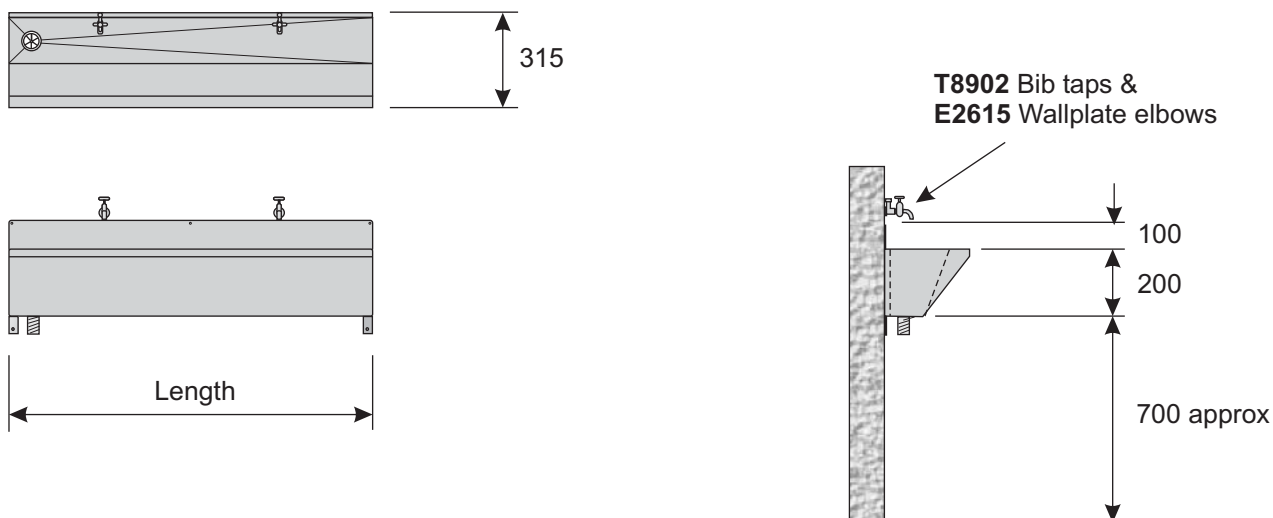

## W14 - Taplanding Washtrough

Manufactured from 1.2mm thick grade 304, satin polished stainless steel, supplied with brackets and 38mm plastic grated waste (in a left, right or central position). Suitable for use with deck-mounted taps or spouts, using pre-mixed water. Available in any length, up to 3000mm, allowing approximately 600mm per person.

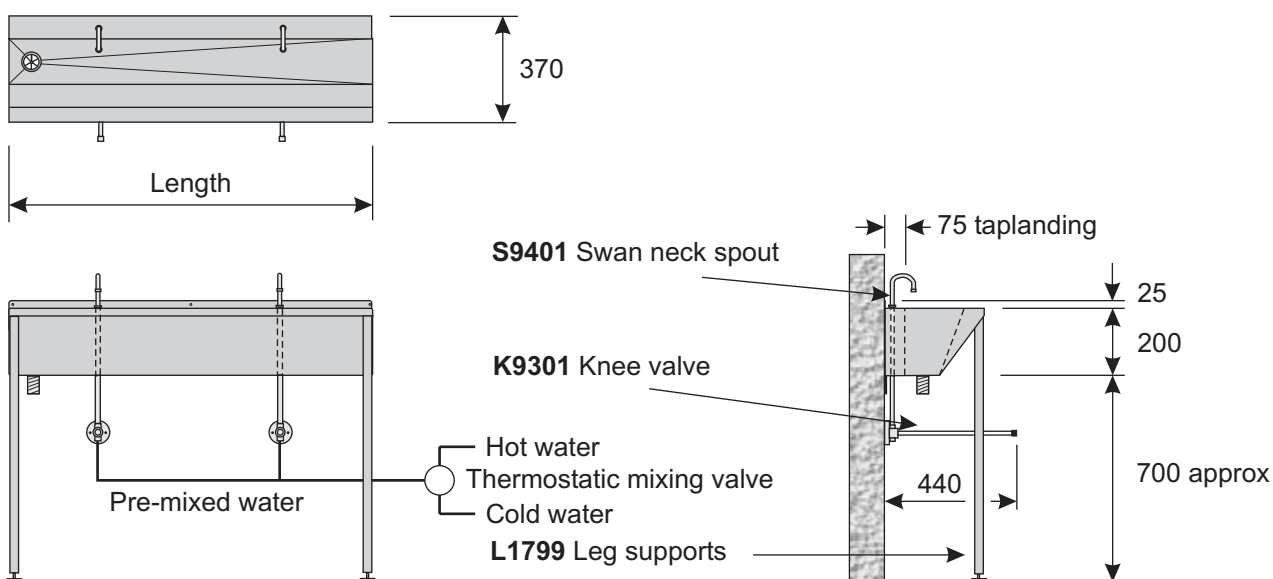


## Optional Extras

- S17** Loose splashback 300mm high
- L1799** Stainless steel leg supports
- T8902** Cross head BS5412 bib tap
- E2615** Wallplate elbow
- S9401** Swan neck spout
- T9622** Thermostatic mixing valve 22mm

- K9301** Knee operated valve - wall-mounted with 20 second timed delay
- K9302** Knee operated valve - frame mounted, non concussive
- F9304** Foot operated valve - non concussive


## W15 - Splashback Washtrough

Manufactured from 1.2mm thick grade 304, satin polished stainless steel, supplied with brackets and 38mm plastic grated waste (in a left, right or central position). Suitable for use with bib spouts, using pre-mixed water. Available in any length, up to 3000mm, allowing approximately 600mm per person.

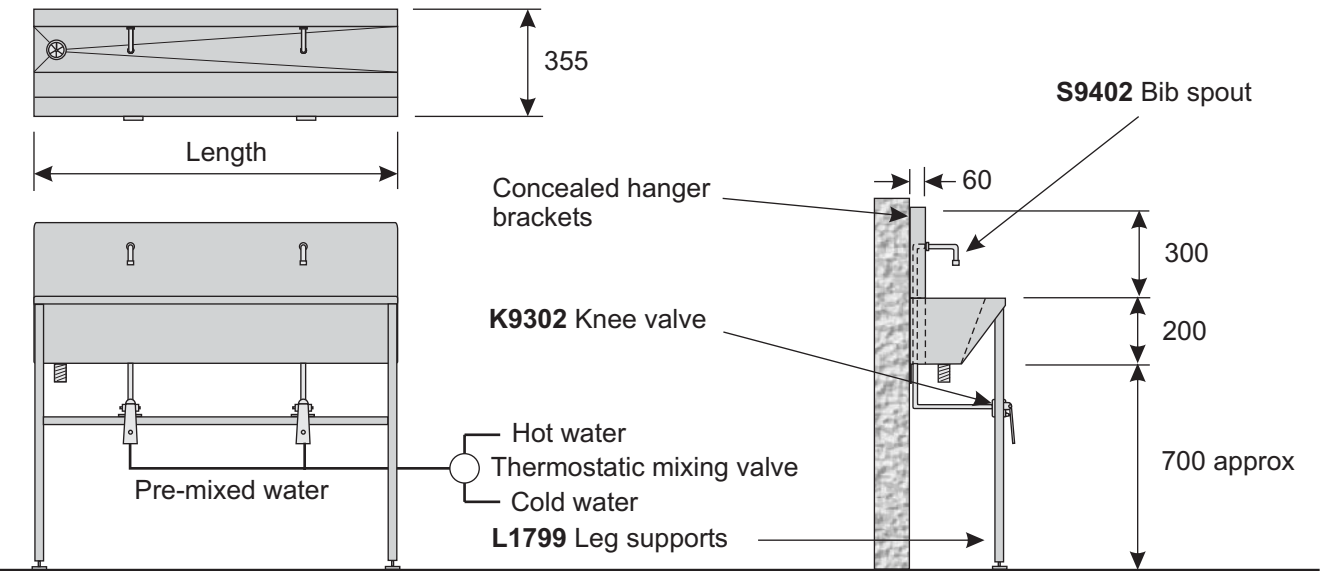

## W16 - Island Washtrough

Manufactured from 1.2mm thick grade 304, satin polished stainless steel, supplied with 30mm square tubular stainless steel stand and 38mm plastic grated waste (in a left, right or central position). Suitable for use with deck-mounted taps or spouts, using pre-mixed water. Available in any length, up to 3000mm, allowing approximately 600mm per person.

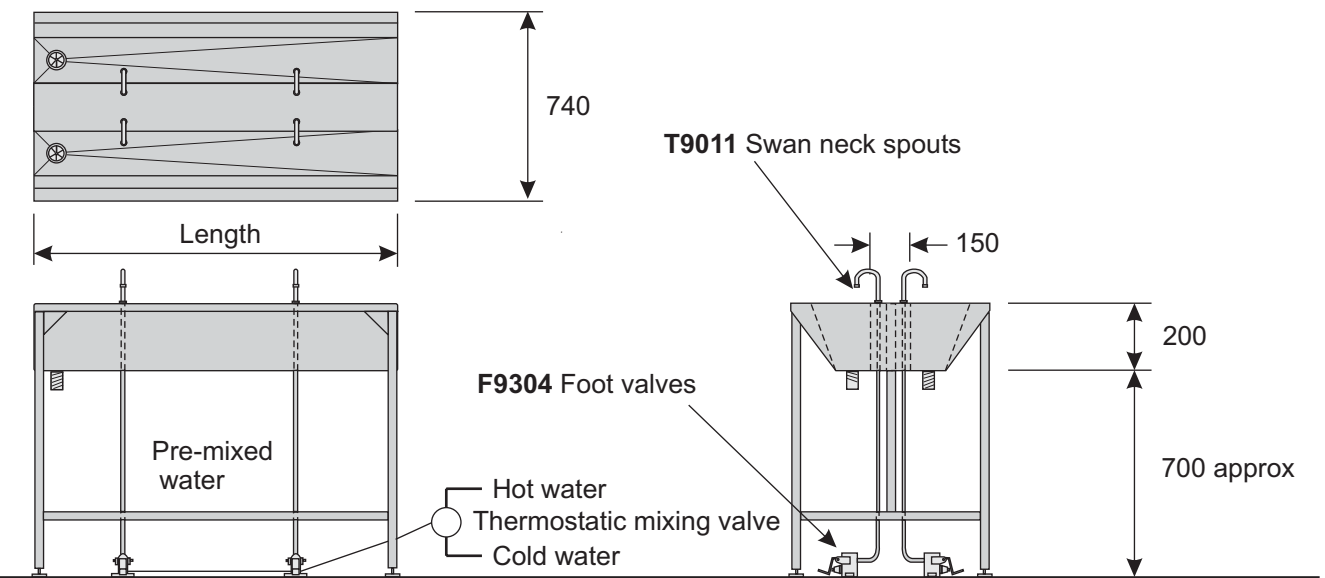

## Optional Extras


- S17** Central splashback 300mm high
- L1799** Stainless steel leg supports
- S9401** Swan neck spout
- S9402** Bib spout
- T9622** Thermostatic mixing valve 22mm

- K9301** Knee operated valve - wall-mounted with 20 second delay
- K9302** Knee operated valve - frame mounted, non concussive
- F9304** Foot operated valve - non concussive

## W1701 - Foot-operated Washfountain (8 person)

## W1702 - Foot-operated Washfountain (6 person)

Manufactured from 1.2/1.5mm thick grade 304, satin polished stainless steel and supplied fully assembled with a liquid soap dispenser built into the spray head assembly. The individual foot operated valves activate water as long as the push button is depressed. The waste connection is via a 38mm plain spigot and the connections to the thermostatic mixing valve (with combined isolating and strainer valves) is via 1/2" BSP female threads. Hot and cold water supply pipes should be a minimum of 28mm diameter reducing in size within the pedestal for connection to the 1/2" BSP connections. Water pressure needs to be a minimum of 1.5bar (22 psi), but should not exceed 7 bar (101 psi), otherwise a pressure reducing valve should be used. When the pressure is below 1.5 bar, we suggest using a twin impellor pump (minimum 2 bar).

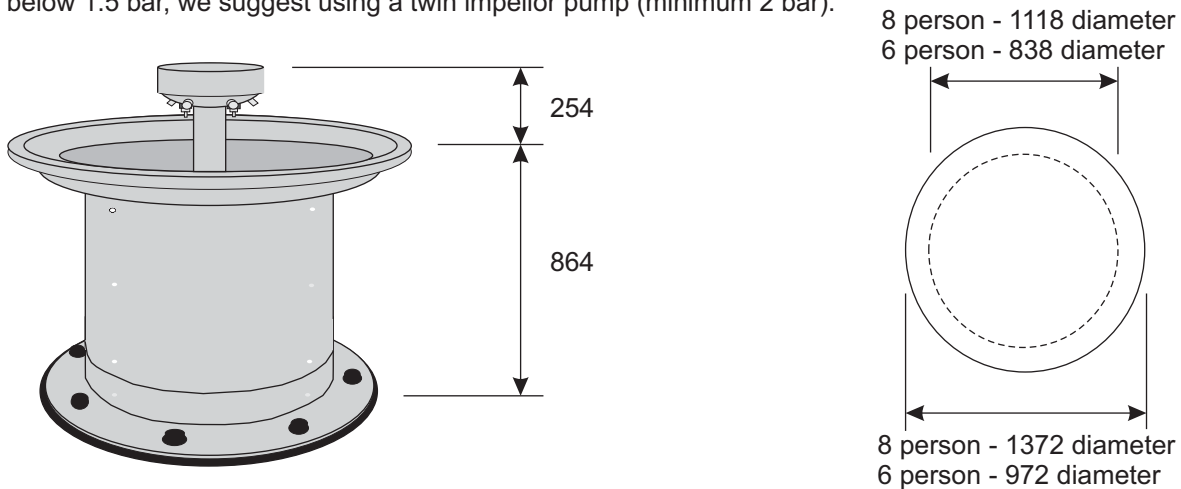


## W1703 - Hand-operated Washfountain (8 person)

## W1704 - Hand-operated Washfountain (6 person)

## W1705 - Sensor-operated Washfountain (8 person)


## W1706 - Sensor-operated Washfountain (6 person)

Manufactured from 1.2/1.5mm thick grade 304, satin polished stainless steel and supplied fully assembled with a liquid soap dispenser built into the spray head assembly. The individual hand or sensor operated valves activate water for between 5 and 60 seconds (subject to adjustment). The waste connection is via a 38mm plain spigot and the connections to the thermostatic mixing valve (with combined isolating and strainer valves) is via 1/2" BSP female threads. Hot and cold water supply pipes should be a minimum of 28mm diameter reducing in size within the pedestal for connection to the 1/2" BSP connections. Water pressure needs to be a minimum of 1.5bar (22psi), but should not exceed 7 bar (101psi), otherwise a pressure reducing valve should be used. When the pressure is less than 1.5 bar, we suggest using a twin impellor pump (minimum 2 bar).

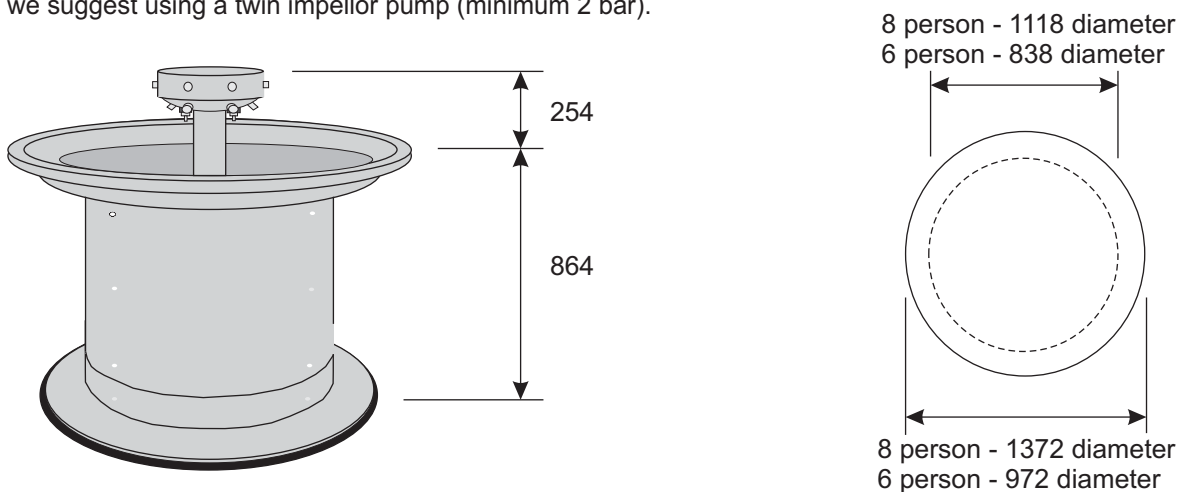


## D2001 - Standard Drinking Fountain

Manufactured from 1.2mm thick grade 304, bright polished stainless steel, supplied with integral bracket, 32mm plastic grated waste and chromium plated brass bubbler with push-button control and 15mm compression inlet.

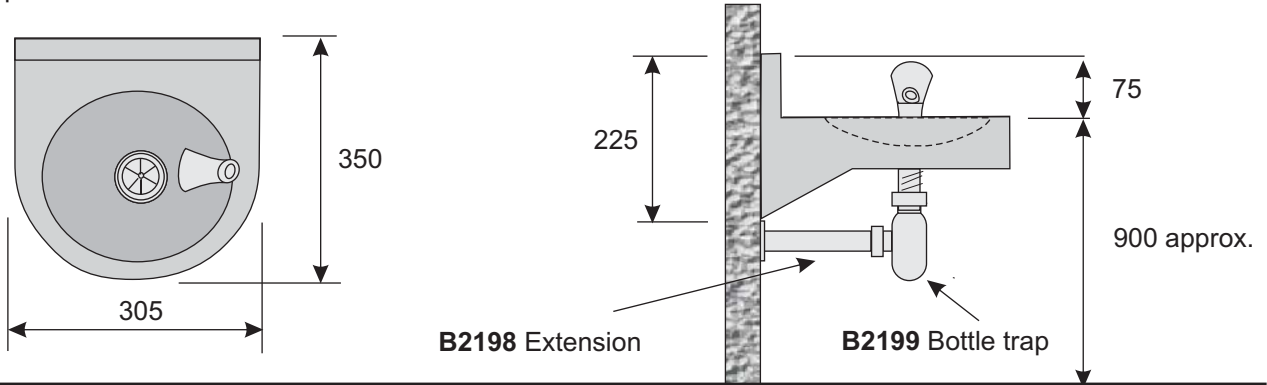


## D2001 - Square Drinking Fountain

Manufactured from 1.2mm thick grade 304, bright polished stainless steel, supplied with integral bracket, 32mm plastic grated waste and chromium plated brass bubbler with push-button control and 15mm compression inlet.

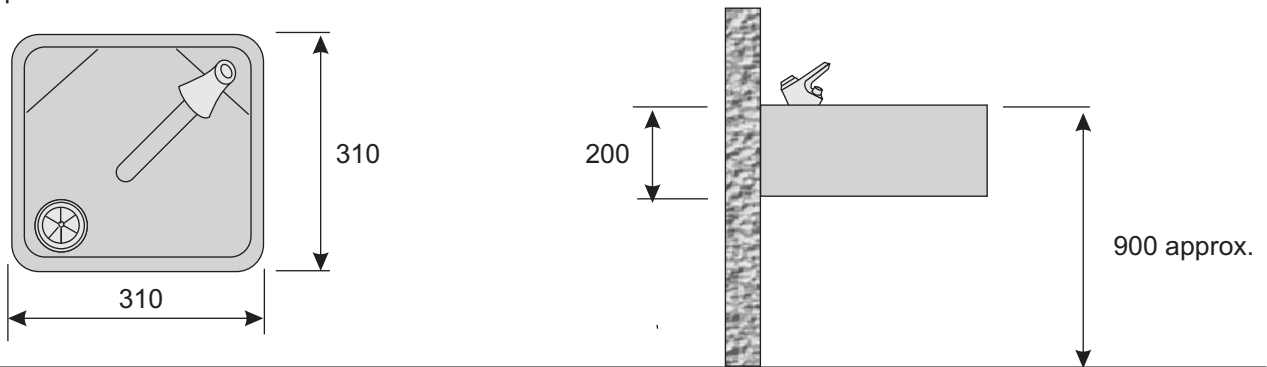

## D2002 - Shrouded Drinking Fountain

Manufactured from 1.2mm thick grade 304, bright polished stainless steel, supplied with removable shroud, 32mm plastic grated waste and chromium plated brass bubbler with push-button control and 15mm compression inlet. A **D2002F** is available with a shroud to the floor.

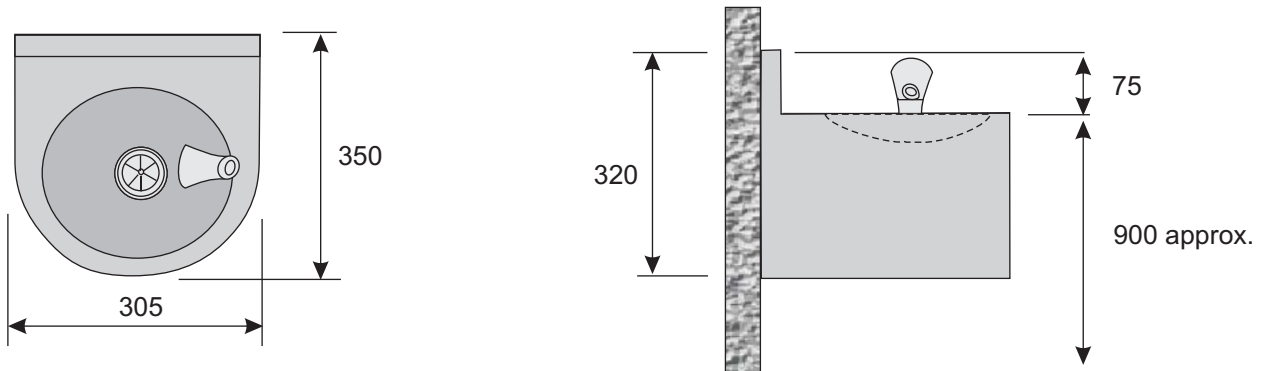


## Optional Extras

Carafe filler can be supplied in lieu of Bubbler  
**B2199** Chromium plated brass bottle trap

**B2198** Chromium plated brass 200mm long extension and wall flange


## D2003 - Inset Drinking Fountain

Manufactured from 1.2mm thick grade 304, satin polished stainless steel, supplied with 32mm plastic grated waste and chromium plated brass bubbler with push-button control and 15mm compression inlet.

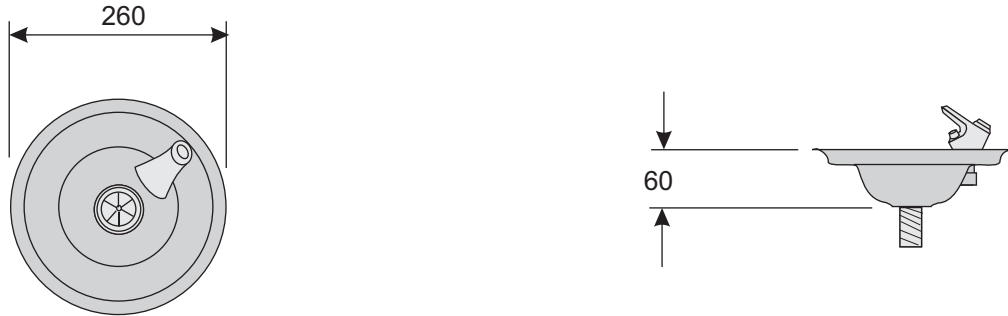

## D2004 - Round Pedestal Drinking Fountain

Manufactured from 1.2mm thick grade 304, satin polished stainless steel, supplied with removable access, floor fixing flange, 32mm plastic grated waste and chromium plated brass bubbler with push-button control and 15mm compression inlet.

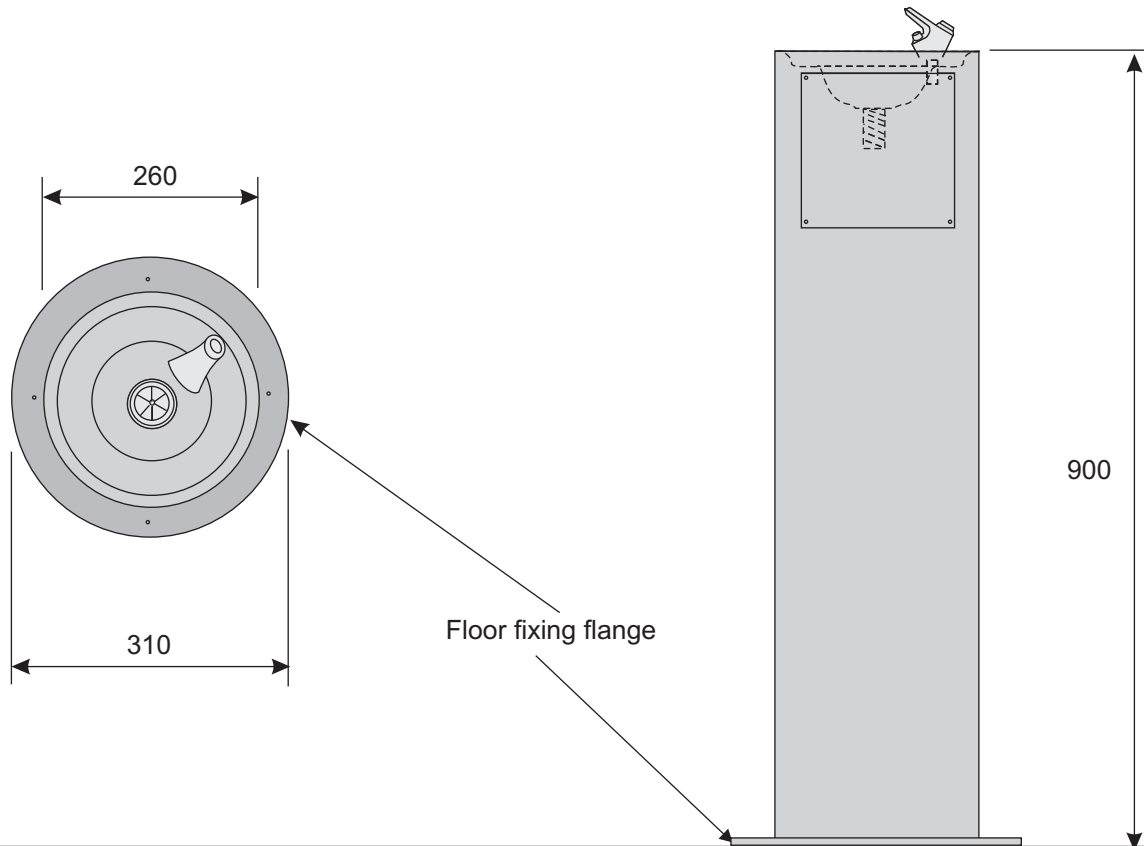


## Optional Extras

**B2199** Chromium plated brass bottle trap

**B2198** Chromium plated brass 200mm long extension tube and wall flange


## D2004 - Square Pedestal Drinking Fountain

Manufactured from 1.2mm thick grade 304, satin polished stainless steel, supplied with removable access, floor fixing flange, 32mm plastic grated waste and chromium plated brass bubbler with push-button control and 15mm compression inlet.

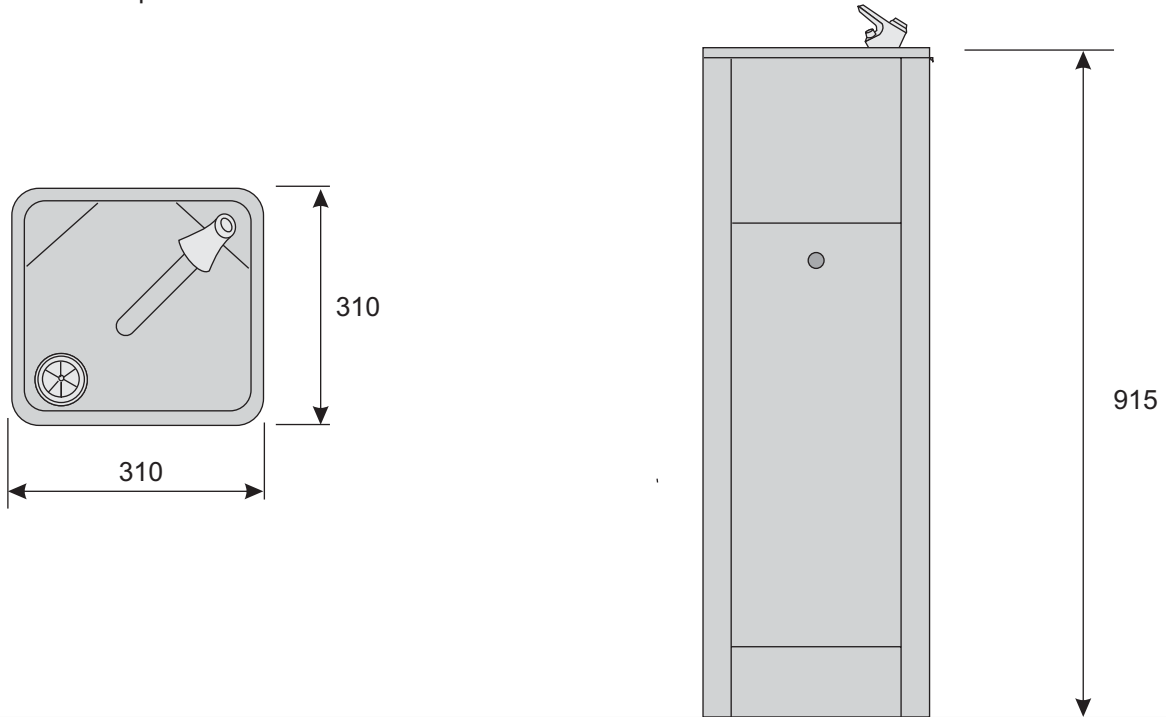


## D2005 - Wall-recessed Drinking Fountain

Manufactured from 1.2mm thick grade 304, satin polished stainless steel, supplied with 32mm plastic grated waste and chromium plated brass bubbler with push-button control and 15mm compression inlet.

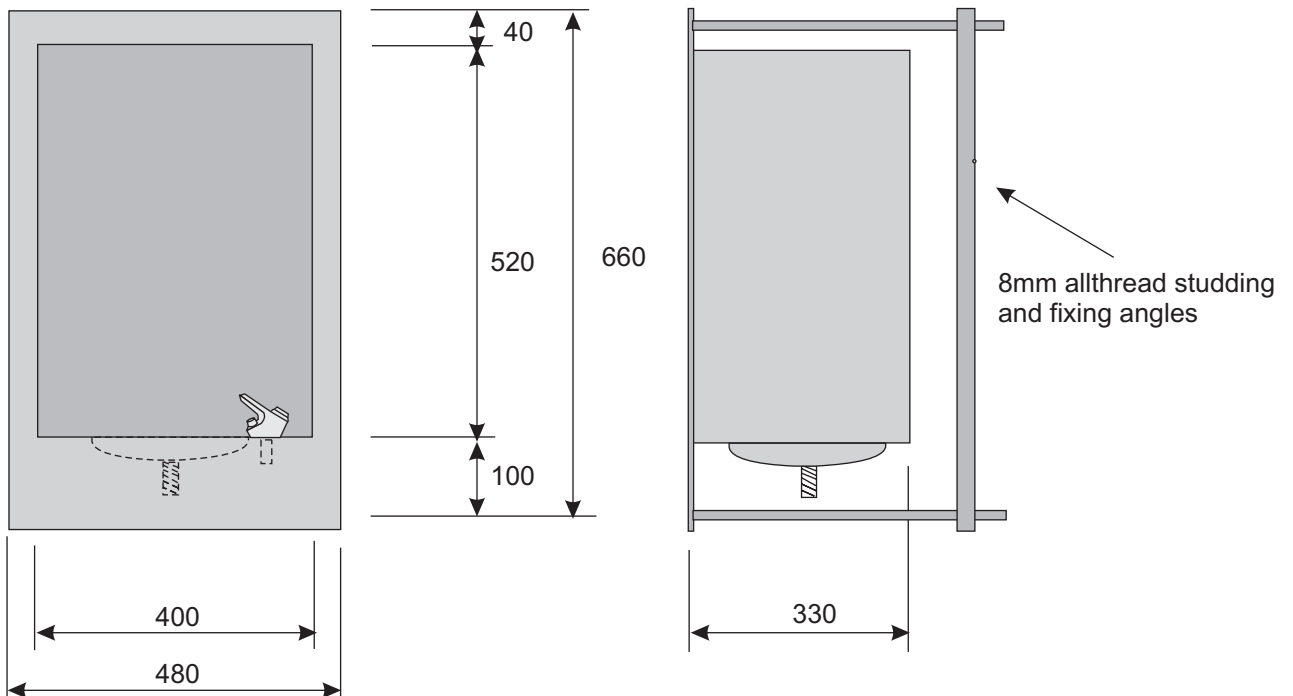


## B1201 - Standard Basin

Manufactured from 1mm thick grade 304, satin polished stainless steel, supplied with valance bracket, two tapholes and 32mm combined waste and overflow assembly.

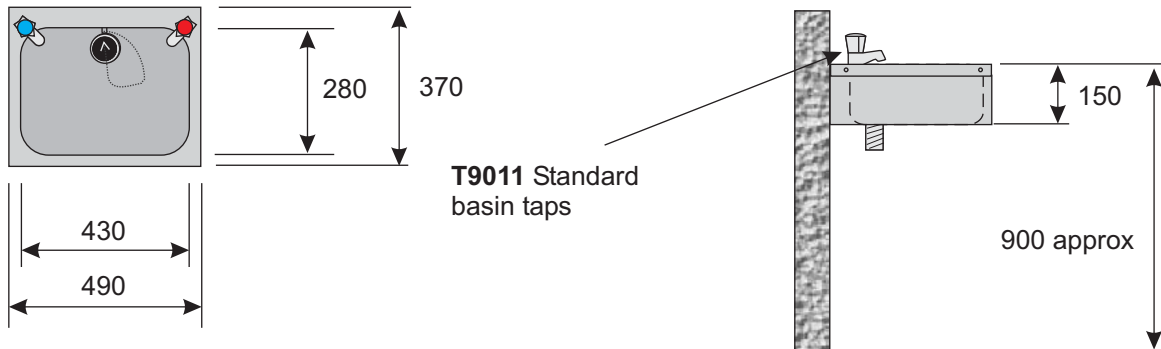


## B1202 - Small Basin

Manufactured from 1mm thick grade 304, bright polished stainless steel, supplied with valance bracket, two tapholes and 32mm combined waste and overflow assembly.

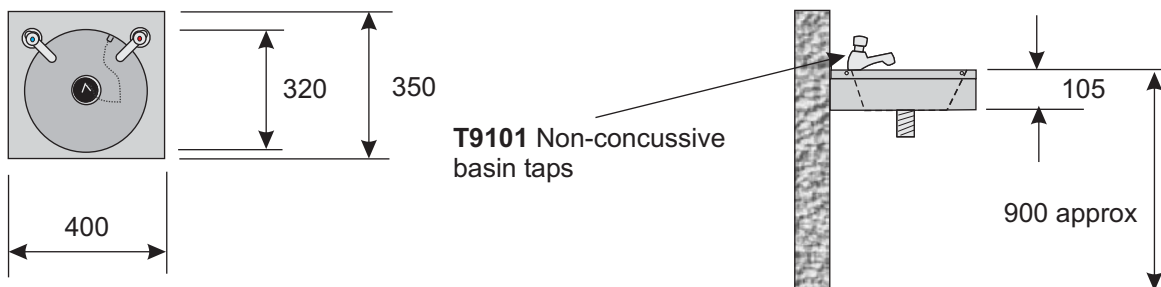

## B1203 - Mini Basin

Manufactured from 1mm thick grade 304, bright polished stainless steel, supplied with valance bracket, two tapholes and 32mm waste, plug and chain (or combined waste and overflow assembly, on request).

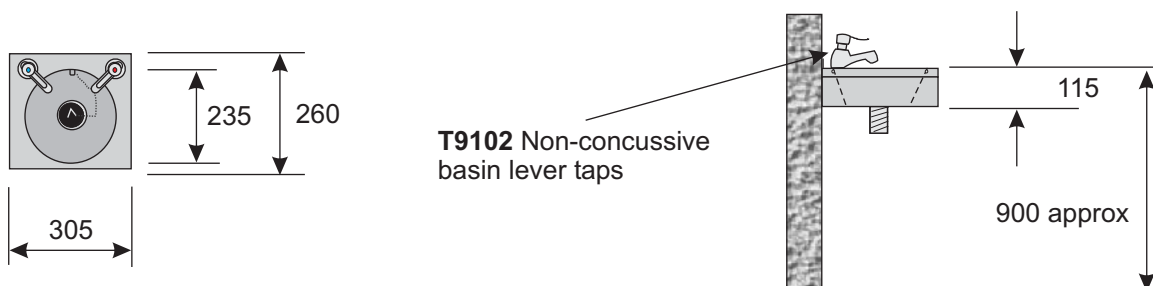


## Optional Extras

- L1298** Stainless steel leg supports 700 high
- L1298** Stainless steel leg supports 900 high
- U1399** Undershield (400mm deep)
- U1398** Undershield to floor
- T8901** Cross head BS5412 basin taps
- T9011** Standard BS5412 basin taps
- T9101** Non-concussive basin taps

- T9201** Quarter turn 75mm lever basin taps
- T9211** Quarter turn 150mm lever basin taps
- K9301** Knee-operated Valve - wall mounted with 20 second delay
- S9401** Swan neck spout
- T9622** Thermostatic mixing valve 22mm

## B1204 - Corner Basin

Manufactured from 1mm thick grade 304, satin polished stainless steel, supplied with valance bracket, two tapholes and 32mm combined waste and overflow assembly.

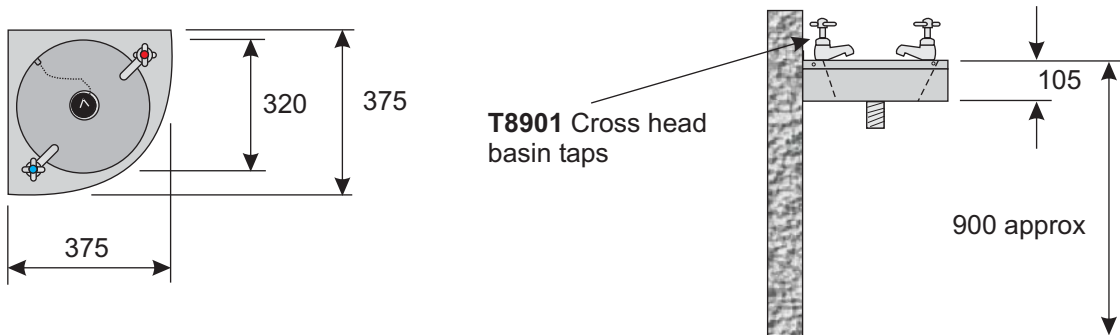


## B1206 - Circular Inset Basin

Manufactured from 1mm thick grade 304, satin polished stainless steel, supplied with 60mm long stud bolts, two tapholes and 32mm combined waste and overflow assembly.



## B1207 - Wall Recessed Basin

Manufactured from 1.2mm thick grade 304, satin polished stainless steel, supplied with CP brass push-button timed flow control valve, CP brass nozzle, four M8 fixing bolts and 32mm plastic flush grated waste.

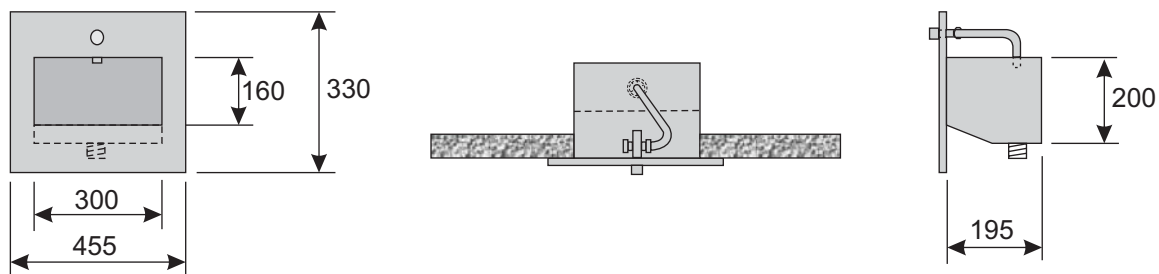


## Optional Extras

**T8901** Cross head BS5412 basin taps  
**T9011** Standard BS5412 basin taps  
**T9101** Non-concussive basin taps

**T9201** Quarter turn 75mm lever basin taps  
**T9211** Quarter turn 150mm lever basin taps

## B1205 - Oval Inset Basin

Manufactured from 1mm thick grade 304, mirror polished stainless steel, supplied with one taphole and 32mm combined waste and overflow assembly.

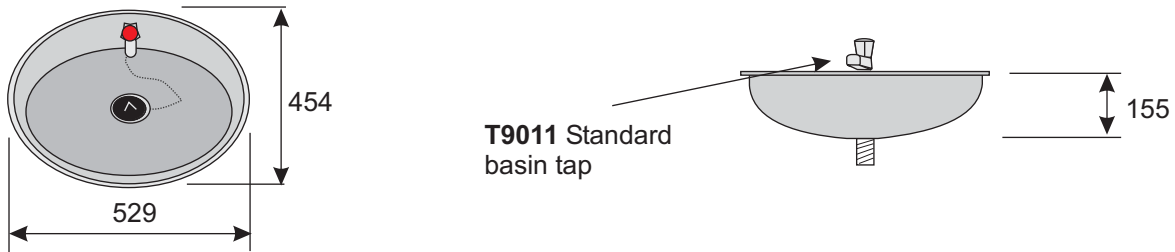

## V1051 - Oval Inset Vanity Bowl

Manufactured from 1mm thick grade 304, mirror polished stainless steel, supplied with 32mm waste and plug.




## B1299 - Inset Sink Bowl

Manufactured from 1mm thick grade 304, bright polished stainless steel, supplied with 38mm combined waste and overflow assembly.



## B1300 - Inset Sink Bowl

Manufactured from 1mm thick grade 304, bright polished stainless steel, supplied with two tapholes and 38mm combined waste and overflow assembly.

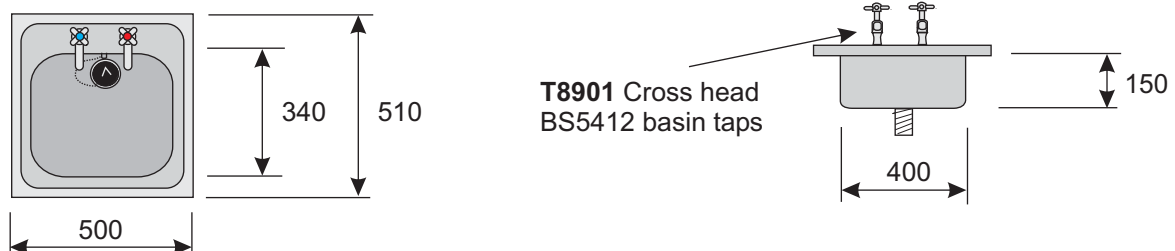


## Optional Extras

**T8901** Cross head BS5412 basin taps  
**T9011** Standard BS5412 basin taps  
**T9101** Non-concussive basin taps


**T9201** Quarter turn 75mm lever basin taps  
**T9211** Quarter turn 150mm lever basin taps

## Vanity Bowls

Manufactured from 1mm thick grade 304, mirror polished stainless steel, supplied with 32mm waste and plug.




	A	B	C
<b>V1023</b>	230	200	115
<b>V1029</b>	290	260	130
<b>V1033</b>	330	300	140
<b>V1039</b>	390	360	150
<b>V1046</b>	460	420	160




## Circular Inset Bowls

Manufactured from 1mm thick grade 304, bright polished stainless steel, supplied with 38mm combined waste and overflow assembly (or no overflow, on request).





	A	B
<b>B1229</b>	290	260
<b>B1233</b>	330	300
<b>B1239</b>	390	360
<b>B1246</b>	460	420





## B1222 - Square Inset Bowl

Manufactured from 1mm thick grade 304, bright polished stainless steel, supplied with 38mm combined waste and overflow assembly (or no overflow, on request).

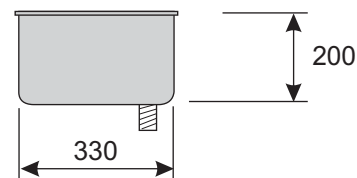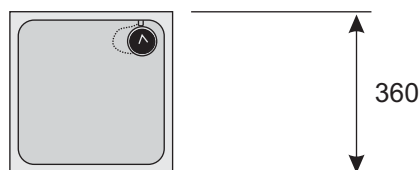

## B1224 - Rectangular Inset Bowl

Manufactured from 1mm thick grade 304, bright polished stainless steel, supplied with 38mm combined waste and overflow assembly (or no overflow, on request).

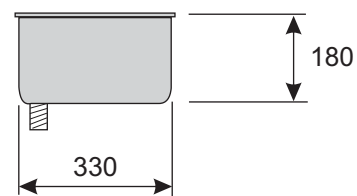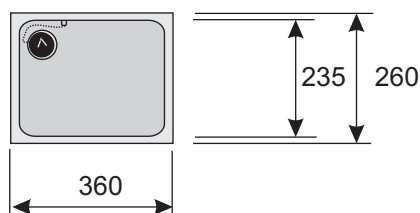


## Optional Extras

- T8901** Cross head BS5412 basin taps
- T8903** Cross head BS5412 sink taps
- T9011** Standard BS5412 basin taps
- T9012** Standard BS5412 sink taps
- T9101** Non-concussive basin taps

- T9201** Quarter turn 75mm lever basin taps
- T9202** Quarter turn 75mm lever sink taps
- T9211** Quarter turn 150mm lever basin taps
- T9212** Quarter turn 150mm lever sink taps


## Bucket Sinks

Manufactured from 1mm thick grade 304, satin polished stainless steel, supplied with brackets, legs, splashback, hinged bucket grating and combined waste and overflow assembly.

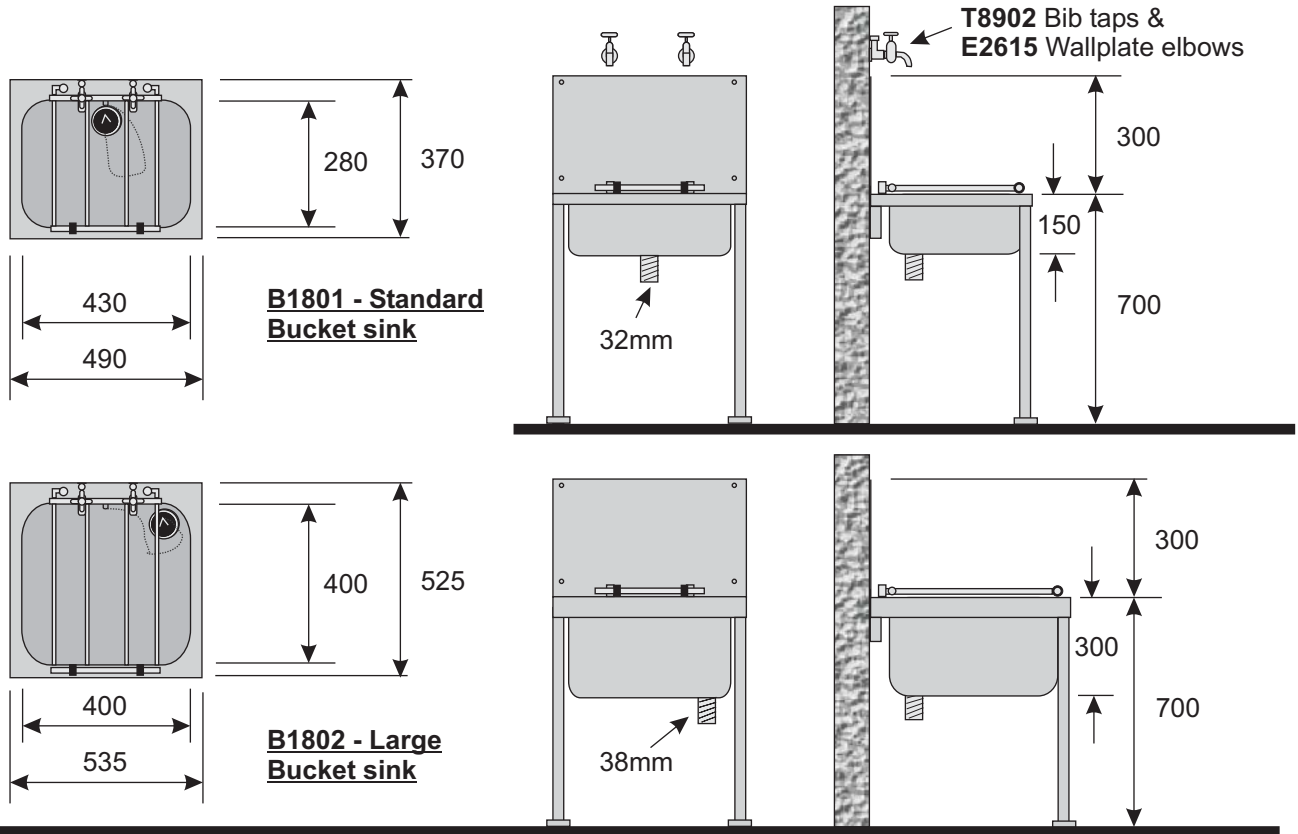

## Utility Sinks

Manufactured from 1.2mm thick grade 304, satin polished stainless steel, supplied with 30mm square tubular grade 430 stainless steel stand and 38mm waste and plug. Tapholes as required. Utility sinks can be made to suit individual requirements.

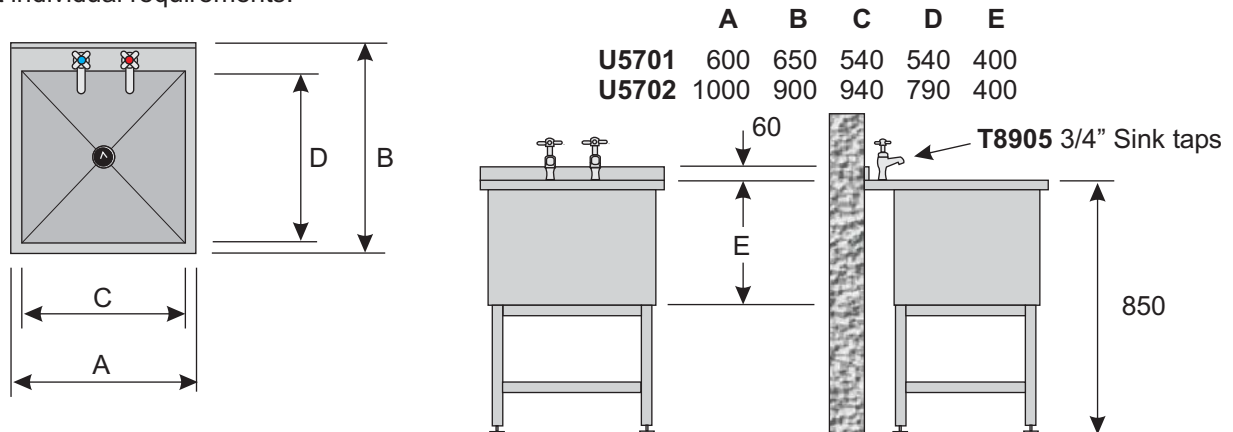


## Optional Extras

- |  |   |
|--|---|
| <b>T8902</b> Cross head BS5412 bib taps        | <b>T9103</b> Cross head BS1010 3/4" sink taps |
| <b>T8903</b> Cross head BS5412 sink taps       | <b>T9012</b> Standard BS5412 sink taps        |
| <b>T8904</b> Cross head BS5412 sink deck mixer | <b>T9013</b> Standard BS5412 sink deck mixer  |
| <b>T8906</b> Cross head BS1010 3/4" bib taps   | <b>T9103</b> Non-concussive bib taps          |


## J0000 - Janitorial Unit 600x600 J0000S - Janitorial Unit 500x600

Manufactured from 1mm thick grade 304, satin polished stainless steel, supplied with legs, hinged bucket grating, combined waste and overflow assemblies and monobloc sink mixer. **J0000HTM** also available, see Hospital Equipment page 27a.

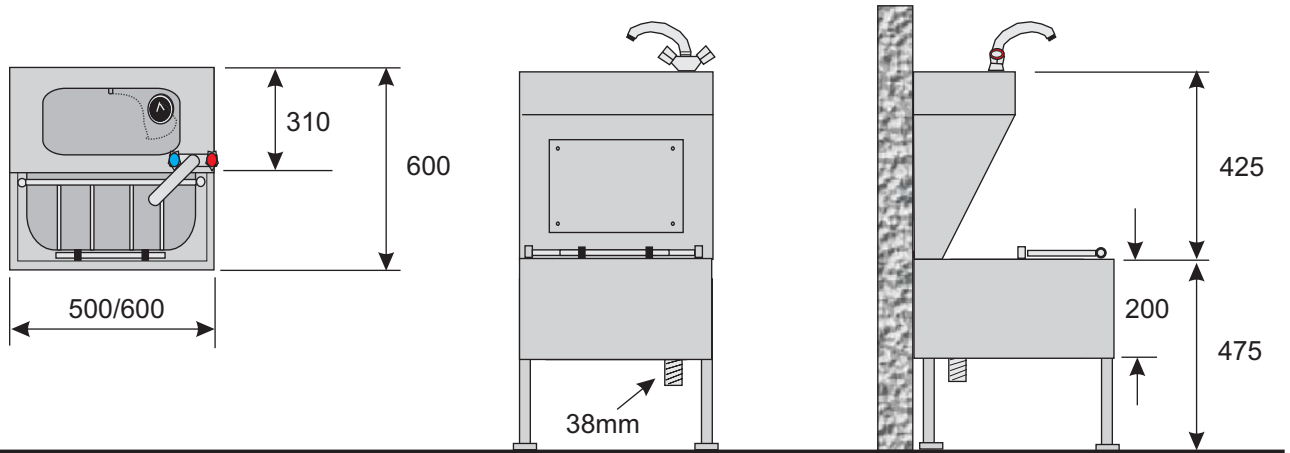

## J0001 - Janitorial Unit

Manufactured from 1mm thick grade 304, satin polished stainless steel, supplied with legs, hinged bucket grating, combined waste and overflow assemblies and monobloc sink mixer.

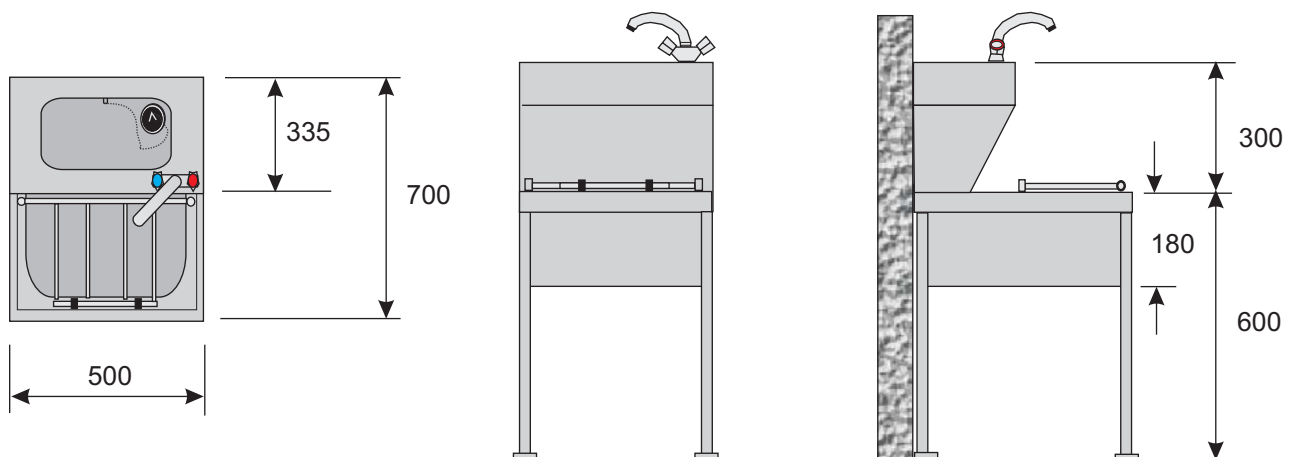


## Optional Extras

- B0006** Stainless steel bucket (12 litres)
- B00006L** Stainless steel bucket lid

## S2201 - Floor Recessed Shower Tray 760x760

## S2202 - Floor Recessed Shower Tray 900x900


Manufactured from 1.2mm thick grade 304, satin polished stainless steel and supplied with 38mm plastic grated waste. Alternative sizes are available, on request.

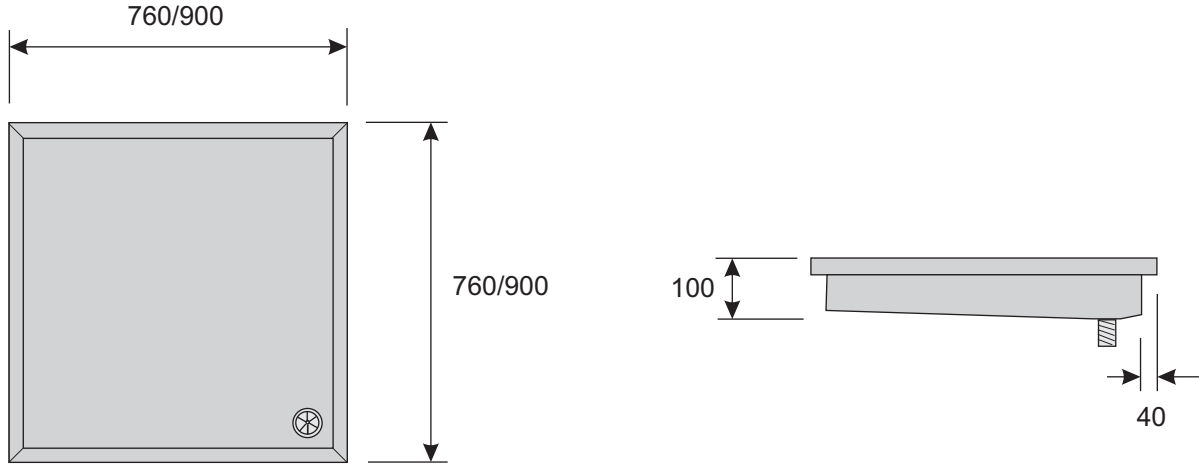

## S2301 - Floor Standing Shower Tray 760x760



## S2302 - Floor Standing Shower Tray 900x900

Manufactured from 1.2mm thick grade 304, satin polished stainless steel and supplied with removable access and 38mm plastic grated waste. Alternative sizes are available, on request.


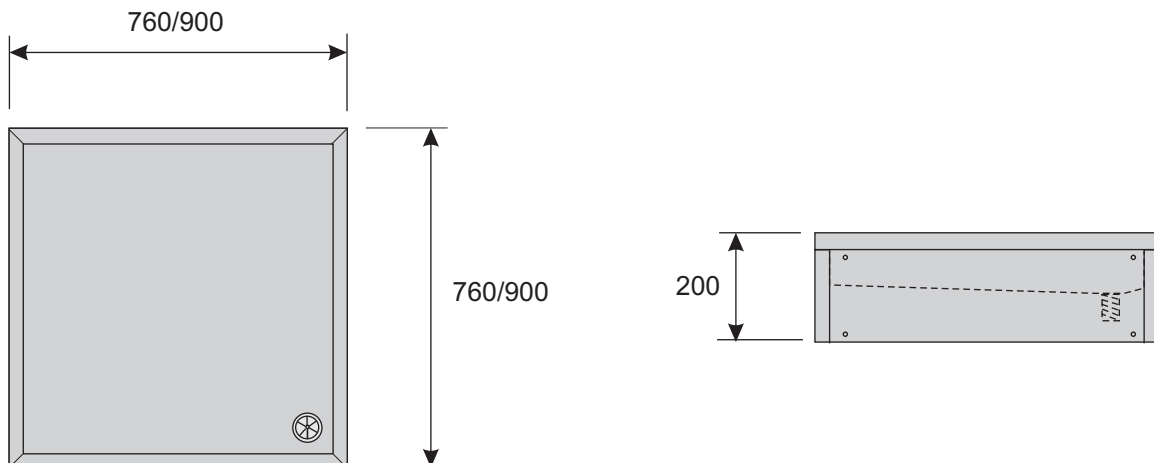


## S24 - Shower Cubicles


Manufactured from 1.2mm thick grade 304, satin polished stainless steel and supplied with removable access (in the tray), tubular curtain rail and 38mm plastic grated waste. The cubicle is double-skinned and can be supplied as a double or triple unit using one shower tray with an integral rear drainage channel and single waste outlet. Alternative sizes are available, on request.

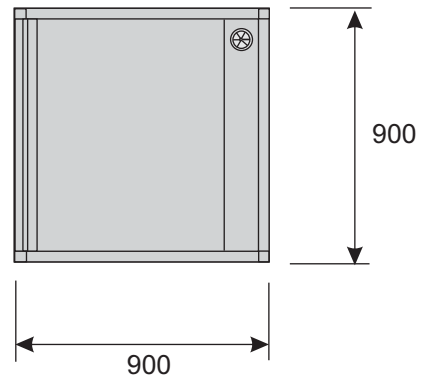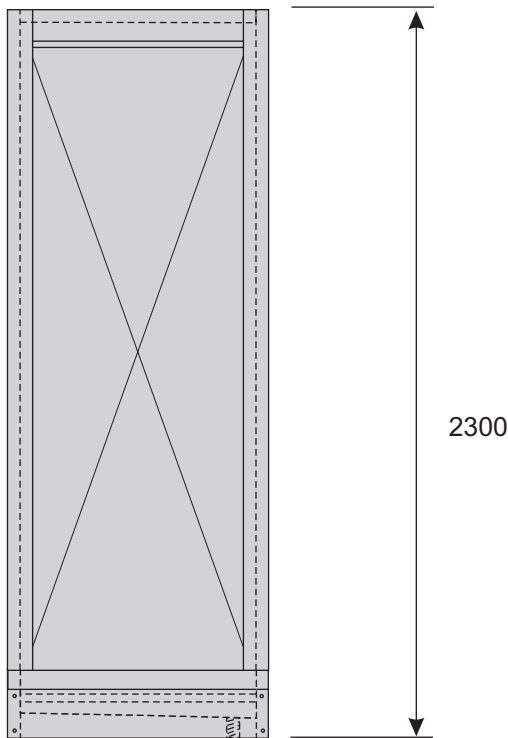

**S2401 - Single**

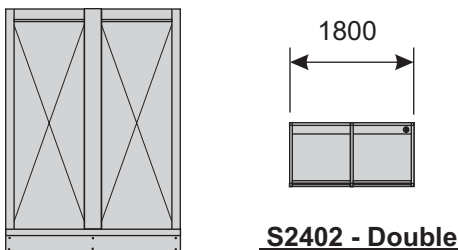

**S2402 - Double**

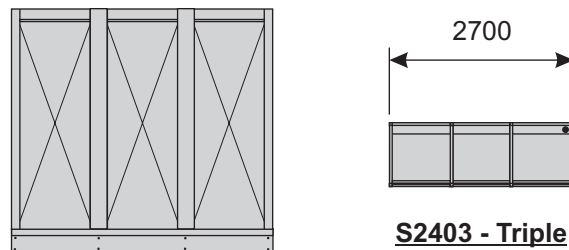


**S2403 - Triple**

## Optional Extras

**S2599** Closed Top


## H37 - Taplanding Scrub-up Trough

Manufactured in accordance with HTM64, from 1.2mm thick grade 304, satin polished stainless steel, supplied with brackets and 38mm plastic grated waste (in a left, right or central position). Suitable for use with deck-mounted taps and spouts. Available in any length, up to 3000mm, allowing approximately 600mm per person.

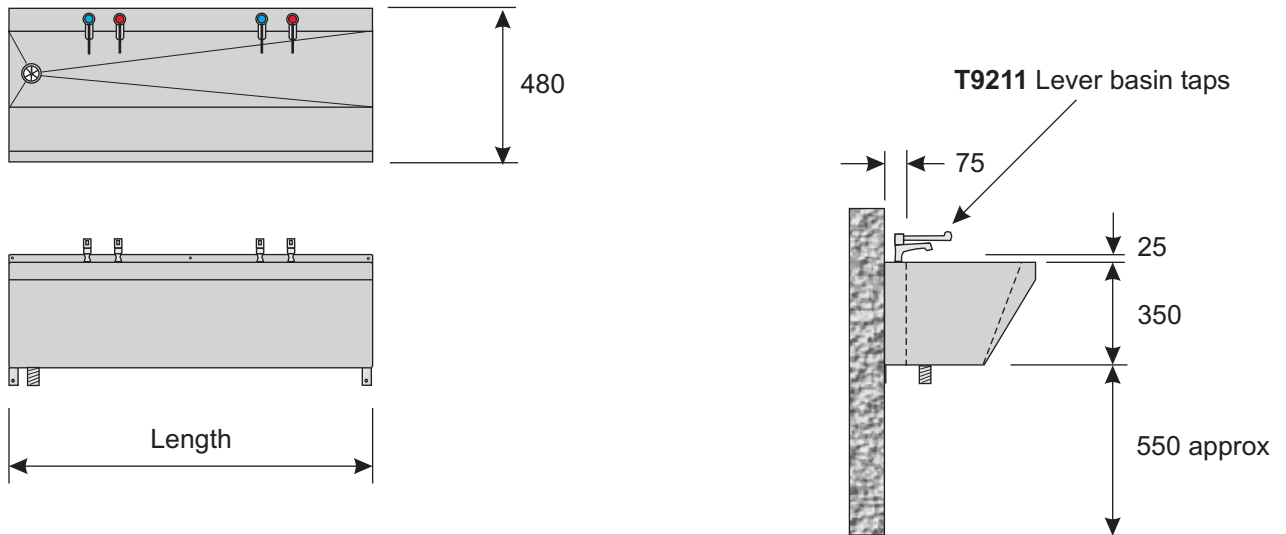

## H38 - Splashback Scrub-up Trough

Manufactured in accordance with HTM64, from 1.2mm thick grade 304, satin polished stainless steel, supplied with brackets and 38mm plastic grated waste (in a left, right or central position). Suitable for use with bib spouts. Available in any length, up to 3000mm, allowing approximately 600mm per person.

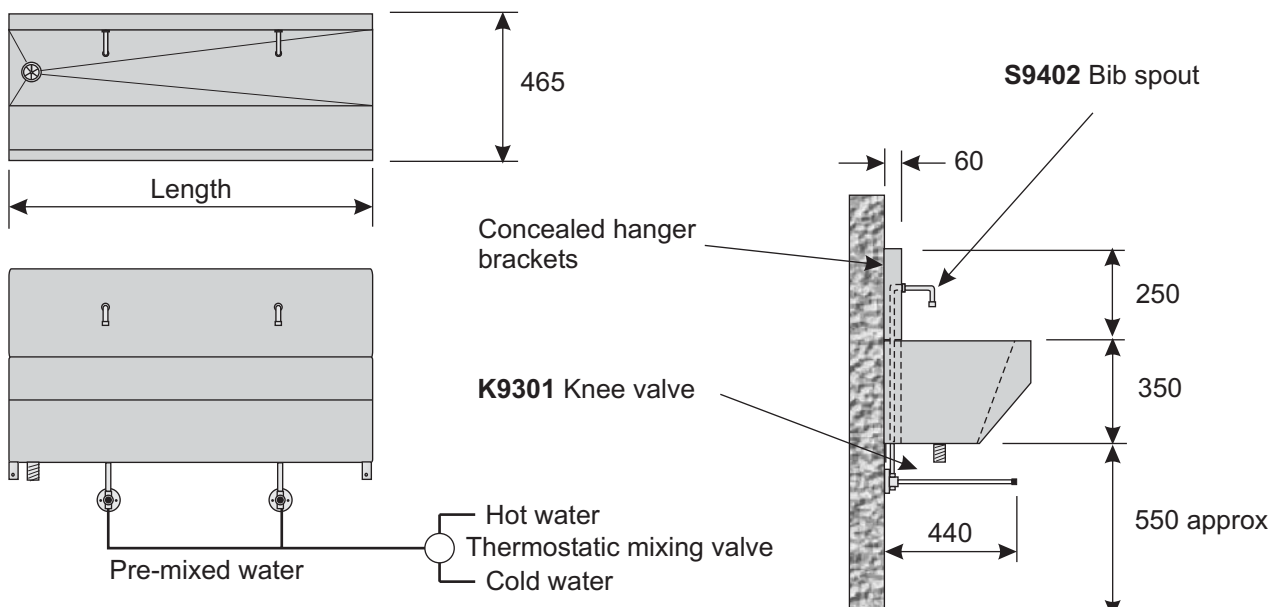


## Optional Extras

- |  |  |
|--|--|
| <b>L1799</b> Stainless steel leg supports        | <b>K9301</b> Knee operated valve - wall-mounted with 20 second timed delay |
| <b>T9201</b> Quarter turn 75mm lever basin taps  | <b>S9402</b> Bib spout   |
| <b>T9204</b> Quarter turn 75mm lever bib taps    | <b>T9622</b> Thermostatic mixing valve 22mm                                |
| <b>T9211</b> Quarter turn 150mm lever basin taps |  |
| <b>T9214</b> Quarter turn 150mm lever bib taps   |  |

## H39 - Standard Scrub-up Trough


Manufactured in accordance with HTM64, from 1.2mm thick grade 304, satin polished stainless steel, supplied with brackets and 38mm plastic grated waste (in a left, right or central position). Suitable for use with wall-mounted taps. Available in any length, up to 3000mm, allowing approximately 600mm per person.

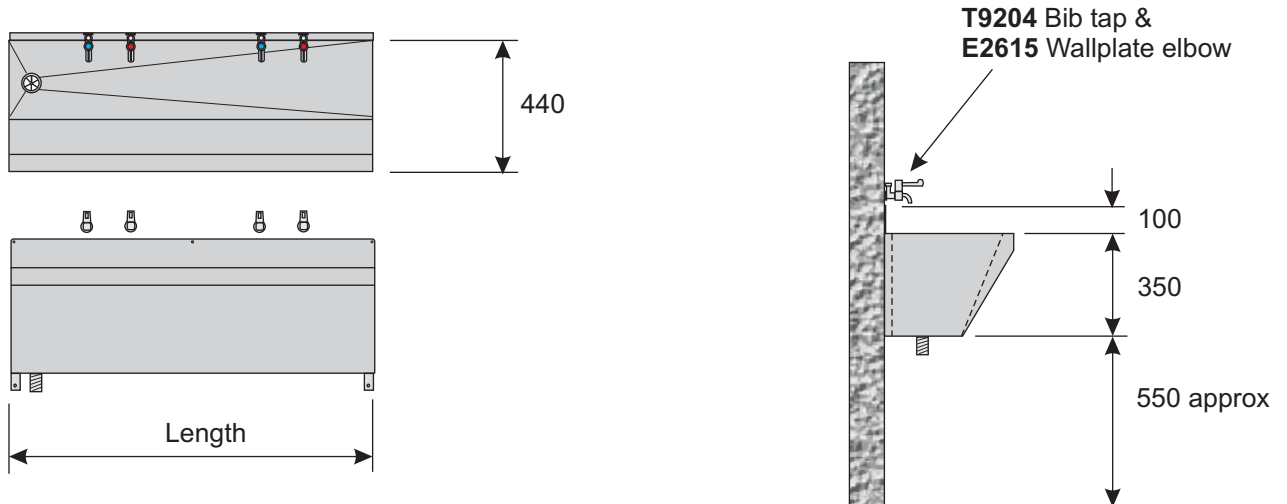

## H3001 - Combined Sink/Slop Hopper (top inlet)

## H3002 - Combined Sink/Slop Hopper (back inlet)

Manufactured in accordance with HTM64, from 1.2mm thick grade 304, satin polished stainless steel, supplied with anti-drip edges, brackets, top or back inlet 38mm flushpipe connection, 110mm spigot soil outlet and 38mm combined waste and overflow assembly. Alternative sizes available on request.

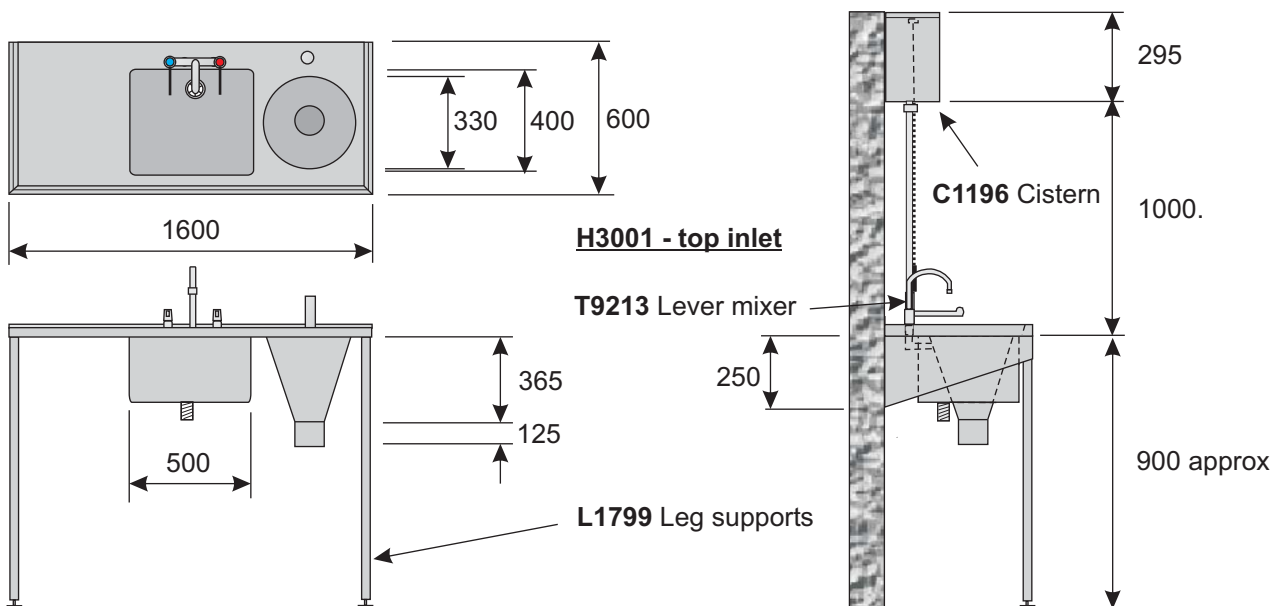

## Optional Extras


- L1799** Stainless steel leg supports
- B1001** Bucket grating
- T3994** 110mm stainless steel pushfit P trap
- T3995** 110mm plastic pushfit P trap
- C1196** St/steel h/l cistern & flushpipe
- G1000** Outlet Grating

- T9202** Quarter turn 75mm lever sink taps
- T9203** Quarter turn 75mm lever sink deck mixer
- T9204** Quarter turn 75mm lever bib taps
- T9212** Quarter turn 150mm lever sink taps
- T9213** Quarter turn 150mm lever sink deck mixer
- T9214** Quarter turn 150mm lever bib taps

## H3101 - Combined Slop Hopper/Drainer (top inlet)

## H3102 - Combined Slop Hopper/Drainer (back inlet)


Manufactured in accordance with HTM64, from 1.2mm thick grade 304, satin polished stainless steel, supplied with anti-drip edges, brackets, top or back inlet 38mm flushpipe connection and 110mm spigot soil outlet. Alternative sizes available on request.

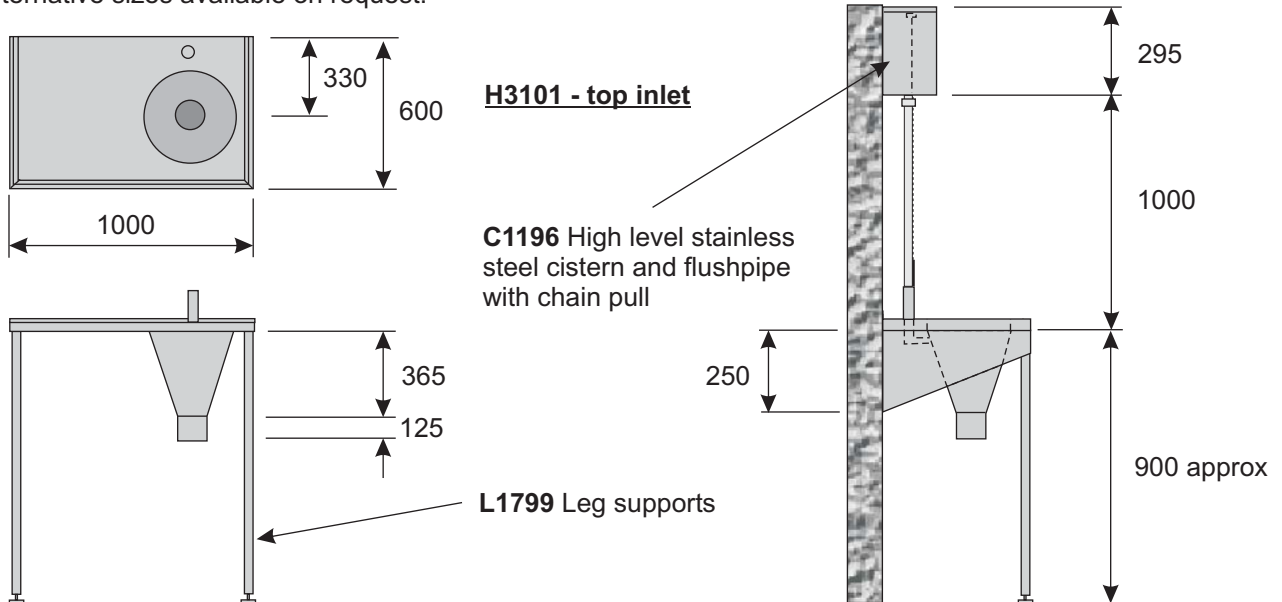

## H3201 - Wall Mounted Slop Hopper (top inlet)

## H3202 - Wall Mounted Slop Hopper (back inlet)

Manufactured in accordance with HTM64, from 1.2mm thick grade 304, satin polished stainless steel, supplied with anti-drip edges, brackets, top or back inlet 38mm flushpipe connection and 110mm spigot soil outlet. Alternative sizes available on request.

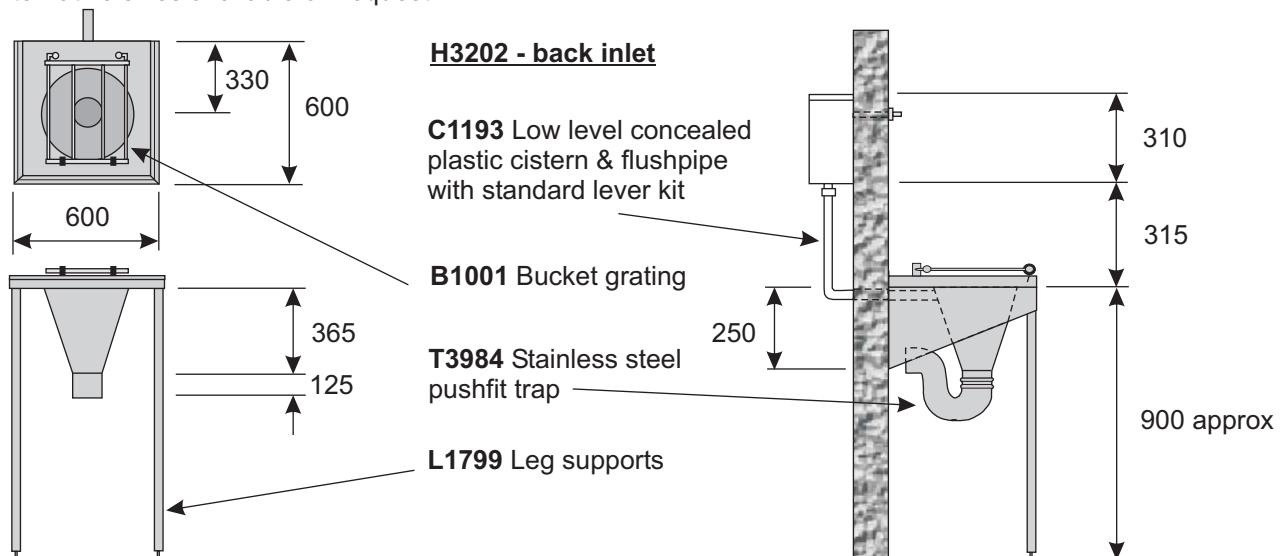

## Optional Extras


- L1799** Stainless steel leg supports
- B1001** Bucket grating
- T3994** 110mm stainless steel pushfit P trap
- T3995** 110mm plastic pushfit P trap
- G1000** Outlet Grating

- C1196** High level stainless steel cistern and flushpipe with chain pull
- C1193** Low level concealed plastic cistern and flushpipe with std lever kit

## H3401 - Floor Standing Slop Hopper (top inlet)


## H3402 - Floor Standing Slop Hopper (back inlet)

Manufactured in accordance with HTM64, from 1.2mm thick grade 304, satin polished stainless steel, supplied with top or back inlet 38mm flushpipe connection and 110mm spigot soil outlet.

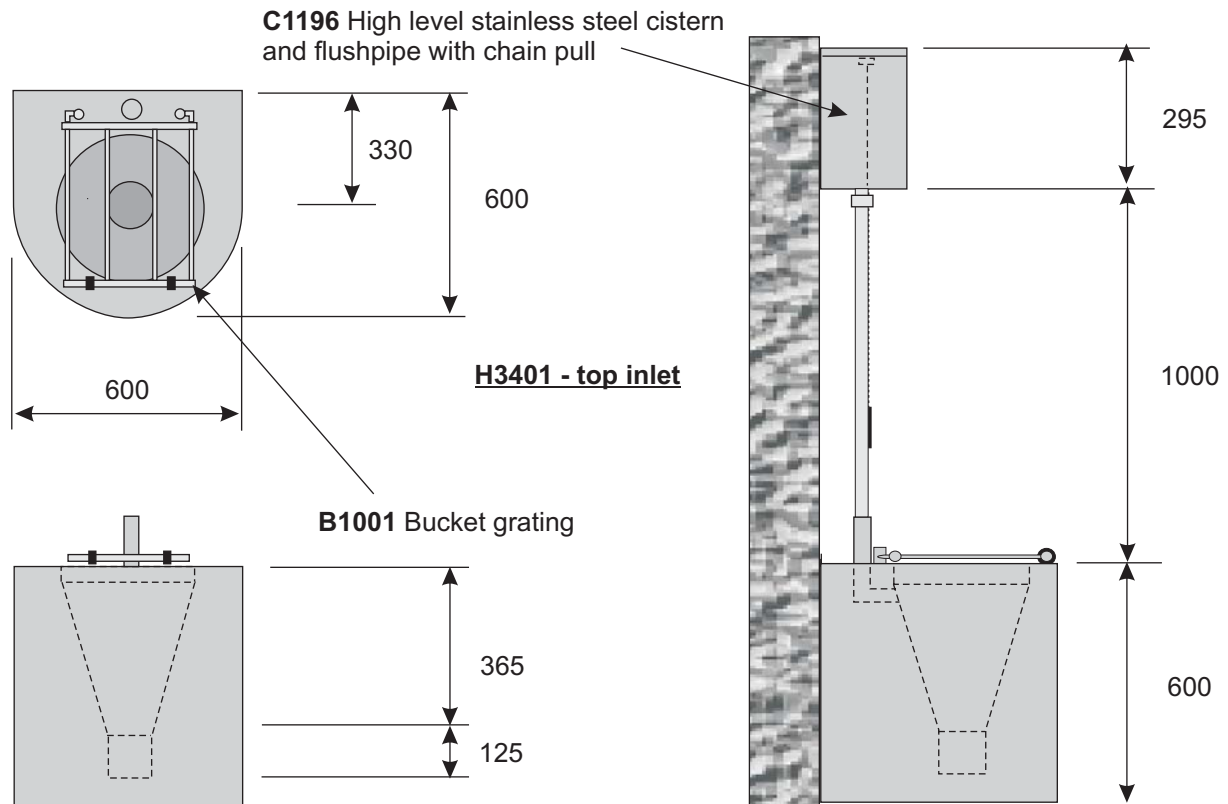

## J0000HTM - Janitorial Unit

Manufactured in accordance with HTM64, from 1mm thick grade 304, satin polished stainless steel, supplied with legs, hinged bucket grating, combined waste and overflow assemblies and QT lever monobloc sink mixer.

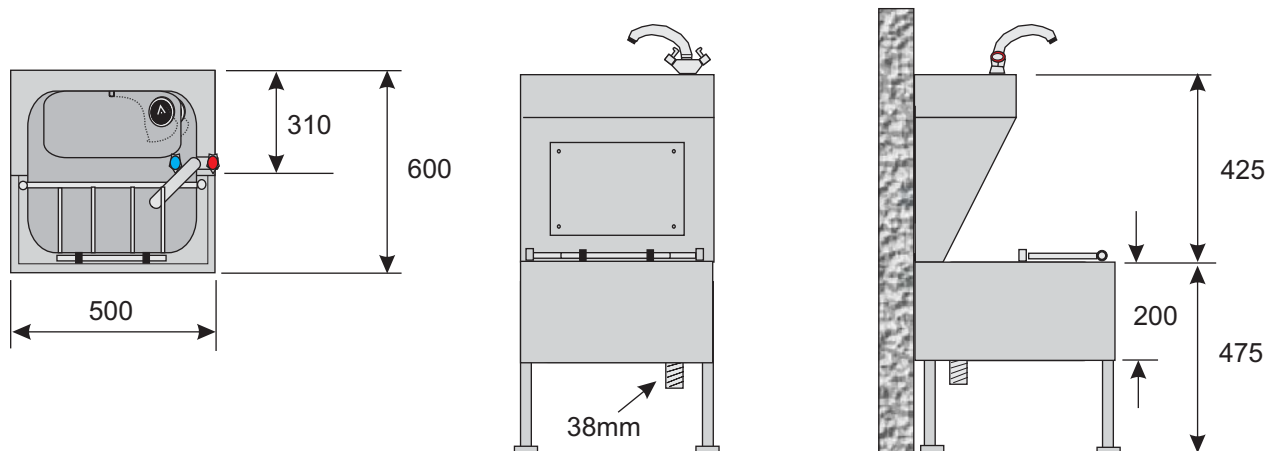


### Optional Extras

- B1001** Bucket grating
- T3994** 110mm stainless steel pushfit P trap
- T3995** 110mm plastic pushfit P trap
- G1000** Outlet Grating

- C1196** High level stainless steel cistern and flushpipe with chain pull
- C1193** Low level concealed plastic cistern and flushpipe with std lever kit


## H3601 - Hospital Sink - Single

Manufactured in accordance with HTM64, from 1.2mm thick grade 304, satin polished stainless steel, supplied with anti-drip edges, brackets and 38mm combined waste and overflow assembly. Tapholes as required.

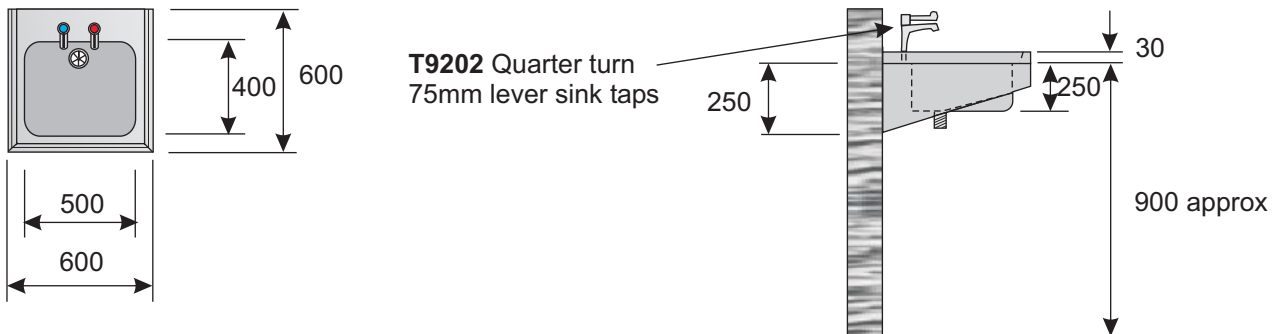


## H3602 - Hospital Sink - Double

Manufactured in accordance with HTM64, from 1.2mm thick grade 304, satin polished stainless steel, supplied with anti-drip edges, brackets and 38mm combined waste and overflow assemblies. Tapholes as required.

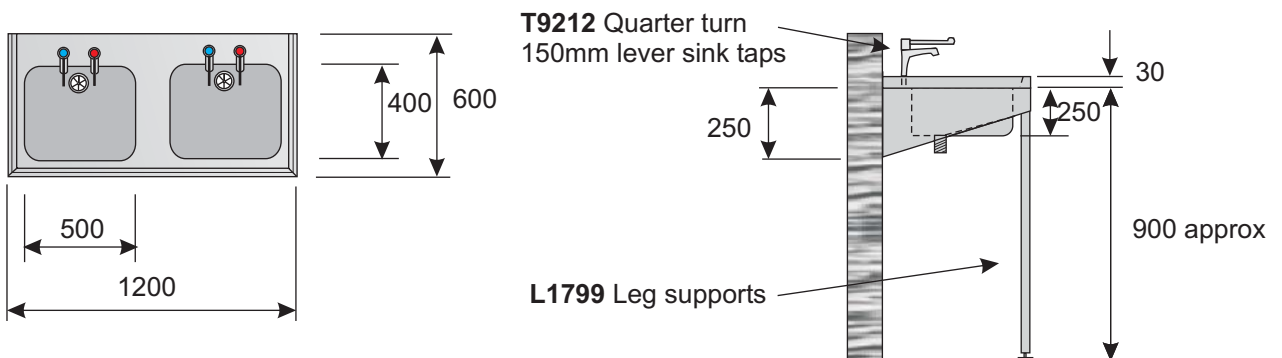

## H3301 - Plaster Sink

Manufactured in accordance with HTM64, from 1.2mm thick grade 304, satin polished stainless steel, supplied with anti-drip edges, brackets and 38mm standpipe strainer waste and plug. A sump containing a pull-out basket and cover is fitted to the bowl. Tapholes as required.

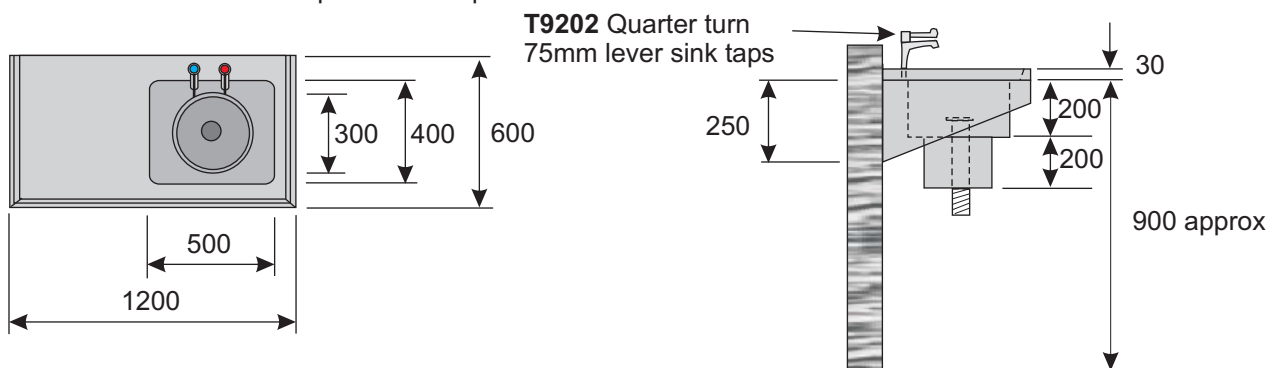

## Optional Extras

**L1799** Stainless steel leg supports

**T9202** Quarter turn 75mm lever sink taps


**T9203** Quarter turn 75mm lever sink deck mixer

**T9212** Quarter turn 150mm lever sink taps

**T9213** Quarter turn 150mm lever sink deck mixer

## Vanitory Units and Tops

Manufactured from 1.2mm thick grade 304, satin polished stainless steel with 300mm diameter bowls, 32mm combined waste and overflow assembly, tapholes as required, 30mm square tubular, grade 430 stainless steel stand and adjustable feet. Vanitory Units and Tops are made to suit individual needs, and are available in any length, up to 2875mm, allowing approximately 500mm per person.

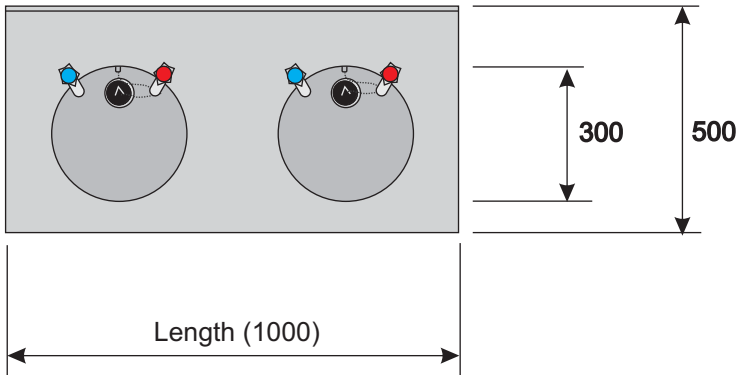



### Vanitory Units

- V1291 - with one bowl (500mm wide)
- V1292 - with two bowls (1000mm wide)
- V1293 - with three bowls (1500mm wide)
- V1294 - with four bowls (2000mm wide)
- V1295 - with five bowls (2500mm wide)
- V1296 - with six bowls (2875mm wide)

### Vanitory Tops

- V1291T - with one bowl (500mm wide)
- V1292T - with two bowls (1000mm wide)
- V1293T - with three bowls (1500mm wide)
- V1294T - with four bowls (2000mm wide)
- V1295T - with five bowls (2500mm wide)
- V1296T - with six bowls (2875mm wide)

### V1292 - Vanitory Unit

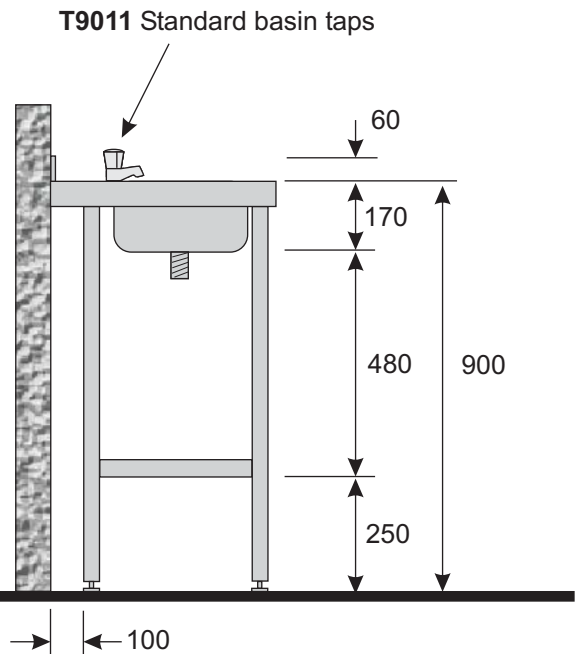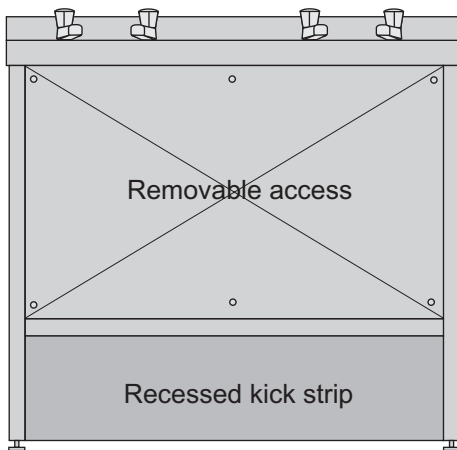


## Optional Extras

- L1799 Stainless steel leg supports (for top only)
- T8901 Cross head BS5412 basin taps
- T9011 Standard BS5412 basin taps


- T9101 Non-concussive basin taps
- T9201 Quarter turn 75mm lever basin taps
- T9211 Quarter turn 150mm lever basin taps

## Inset Sink Bowls


Manufactured from 1.2mm thick grade 304, satin polished stainless steel with a flat flange which can be fixed into a worktop with a strong adhesive, like 'gripfil' or 'silicone'.

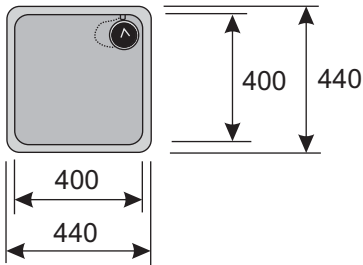


	A
<b>B4425</b>	210
<b>B4430</b>	300




Supplied with 38mm combined waste & overflow assembly (standpipe strainer waste & plug can be supplied at extra cost).

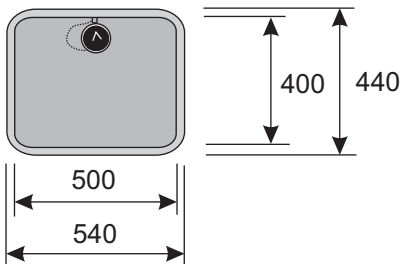


	A
<b>B5425</b>	250
<b>B5430</b>	300

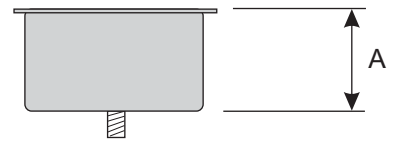

Supplied with 38mm combined waste & overflow assembly (standpipe strainer waste & plug can be supplied at extra cost).

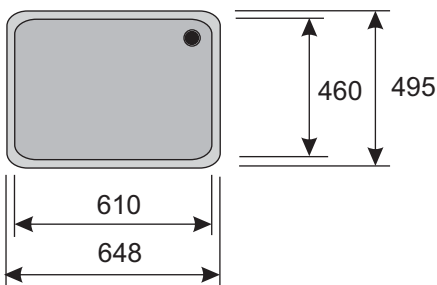

	A
<b>B6430</b>	300

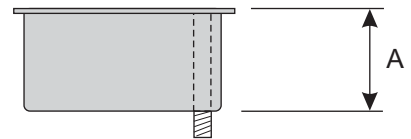


Supplied with 38mm standpipe strainer waste & plug (can be fitted with 38mm combined waste & overflow assembly).

## Optional Extras

<b>T8903</b>	Cross head BS5412 sink taps	<b>T9014</b>	Standard BS5412 sink monobloc mixer
<b>T8904</b>	Cross head BS5412 sink deck mixer	<b>T9202</b>	Quarter turn 75mm lever sink taps
<b>T8905</b>	Cross head BS1010 3/4" sink taps	<b>T9203</b>	Quarter turn 75mm lever sink deck mixer
<b>T9012</b>	Standard BS5412 sink taps	<b>T9212</b>	Quarter turn 150mm lever sink taps
<b>T9013</b>	Standard BS5412 sink deck mixer	<b>T9213</b>	Quarter turn 150mm lever sink deck mixer

## Ice Sink Units

Manufactured from 1.2mm thick grade 304, satin polished stainless steel, supplied with 30mm square tubular grade 430 stainless steel stand, adjustable feet, undershelf, removable partitions and 32mm waste and plug. Alternative sizes are available, on request.

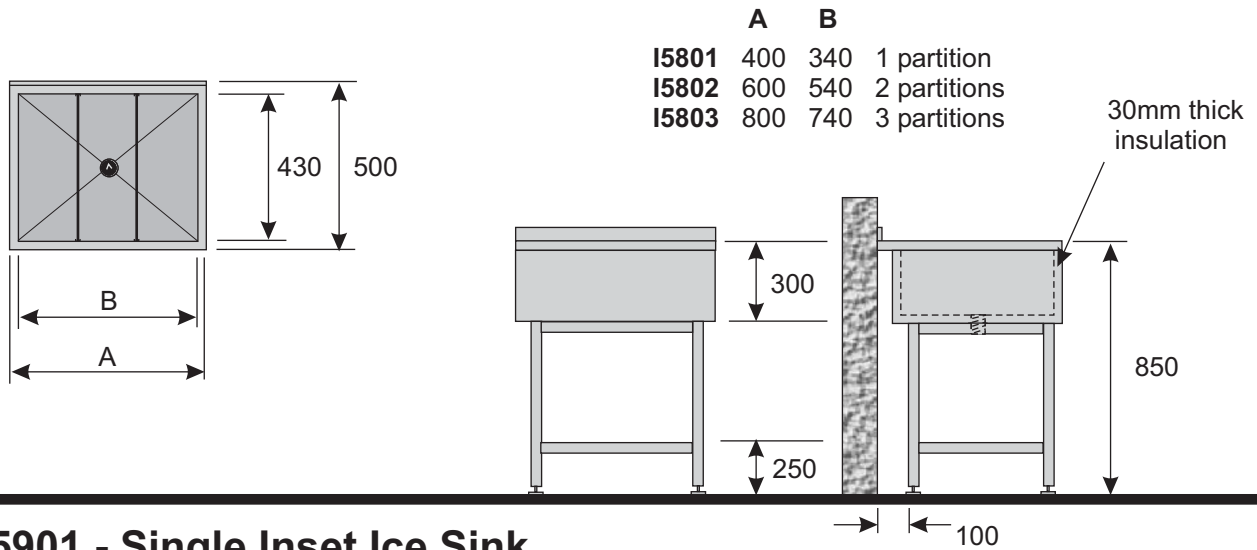


### I5901 - Single Inset Ice Sink

Manufactured from 1.2mm thick grade 304, satin polished stainless steel, supplied with a loose lid and 32mm waste and plug. Alternative sizes are available, on request.



### I5902 - Double Inset Ice Sink

Manufactured from 1.2mm thick grade 304, satin polished stainless steel, supplied with one loose lid and 32mm waste and plug. Alternative sizes are available, on request.

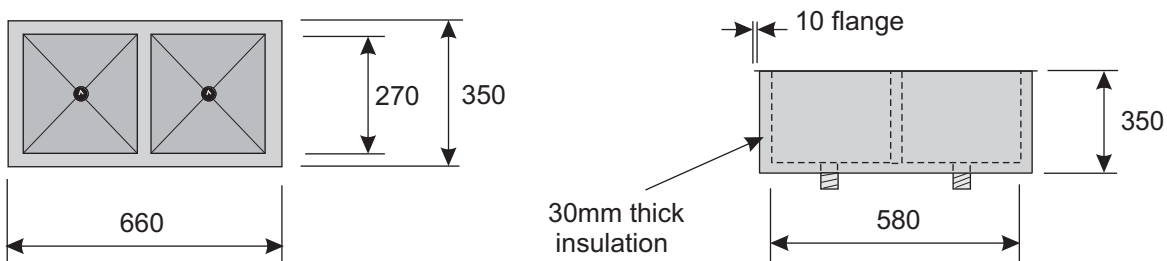

## Optional Extras



- S0106** Speed rail 600x100mm
- S0109** Speed rail 900x100mm
- S0112** Speed rail 1200x100mm

- C0990** Condiment set (sits in Ice Chest)
- B1560** Blender shelf 600x150mm
- T2260** Towel rail 600x20mm diameter

## Mini Sink Units


Manufactured from 1.2mm thick grade 304, satin polished stainless steel with 400x340x200mm deep bowl, 38mm combined waste & overflow assembly, tapholes as required, 30mm square tubular, grade 430 stainless steel stand and adjustable feet (with or without undershelf). Standard overall size can be altered and alternative bowl sizes, are available.

Alternative bowl sizes available:  
 250x250x200 deep  
 335x235x180 deep  
 330x330x200 deep  
 350x290x200 deep  
 400x290x200 deep

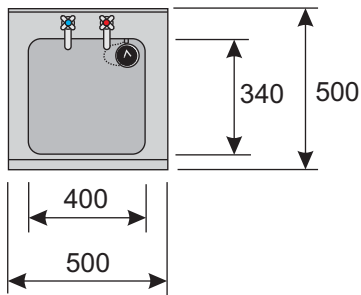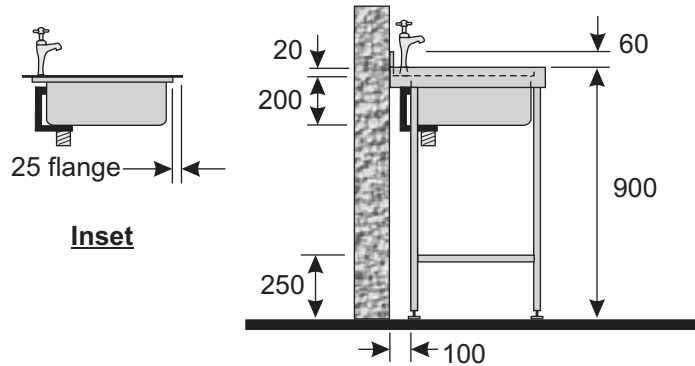

**Mini Sink SB Unit**  
**B6505**


**Mini Sink SB Top**  
**B6505T** - (sit-on or inset)

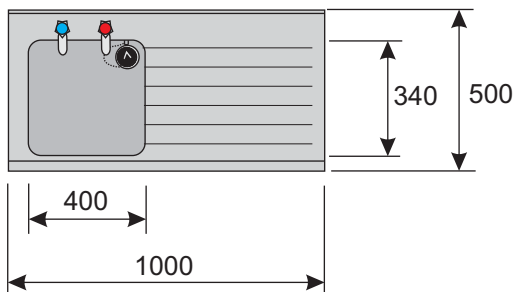

**Mini Sink SBSD Unit**  
**B6510**

**Mini Sink SBSD Top**  
**B6510T** - (sit-on or inset)

NB: left or right hand drainer

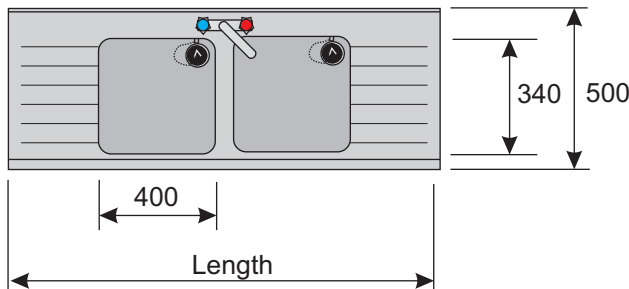

**Mini Sink DBDD Unit**  
**B6515** - 1500mm long  
**B6518** - 1800mm long

**Mini Sink DBDD Top**  
**B6515T** - 1500mm long (sit-on or inset)  
**B6518T** - 1800mm long (sit-on or inset)

## Optional Extras



- |  |   |
|--|---|
| <b>C6893</b> Cut out                           | <b>T9013</b> Standard BS5412 sink deck mixer          |
| <b>U6897</b> End upstand                       | <b>T9014</b> Standard BS5412 sink monobloc mixer      |
| <b>T8903</b> Cross head BS5412 sink taps       | <b>T9202</b> Quarter turn 75mm lever sink taps        |
| <b>T8904</b> Cross head BS5412 sink deck mixer | <b>T9203</b> Quarter turn 75mm lever sink deck mixer  |
| <b>T8905</b> Cross head BS1010 3/4" sink taps  | <b>T9212</b> Quarter turn 150mm lever sink taps       |
| <b>T9012</b> Standard BS5412 sink taps         | <b>T9213</b> Quarter turn 150mm lever sink deck mixer |

## Standard Sink Units

Manufactured from 1.2mm thick grade 304, satin polished stainless steel with 610x460x300mm deep bowls, 38mm standpipe strainer waste, tapholes as required, 30mm square tubular, grade 430 stainless steel stand and adjustable feet (with or without undershelf). Standard overall size can be altered and alternative bowl sizes are available.


Alternative bowl sizes available:

- 400x400x250 deep
- 400x400x300 deep
- 500x400x250 deep
- 500x400x300 deep
- 610x460x250 deep

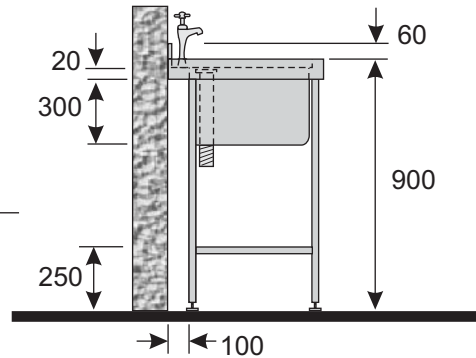


**Standard SB Sink Unit**  
**S6017**

**Standard SB Sink Top**  
**S6017T** - (sit-on or inset)

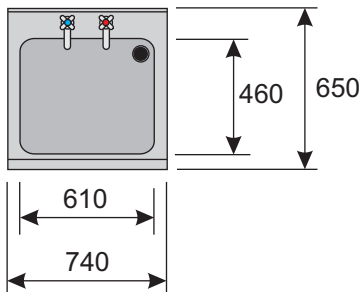

**Standard DB Sink Unit**  
**S6115**

**Standard DB Sink Top**  
**S6115T** - (sit-on or inset)

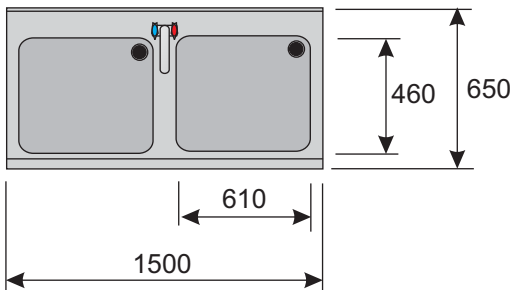


**Standard SBSD Sink Unit**

- S6210** - 1000mm long
- S6212** - 1200mm long
- S6215** - 1500mm long
- S6218** - 1800mm long

**Standard SBSD Sink Top**

- S6210T** - 1000mm long (sit-on or inset)
- S6212T** - 1200mm long (sit-on or inset)
- S6215T** - 1500mm long (sit-on or inset)
- S6218T** - 1800mm long (sit-on or inset)

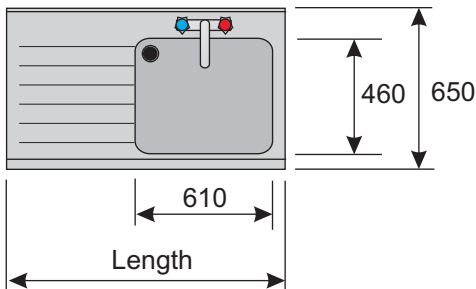


NB: left or right hand drainer

## Optional Extras


- |  |   |
|--|---|
| <b>C6893</b> Cut out                           | <b>T9013</b> Standard BS5412 sink deck mixer          |
| <b>U6897</b> End upstand                       | <b>T9014</b> Standard BS5412 sink monobloc mixer      |
| <b>T8903</b> Cross head BS5412 sink taps       | <b>T9202</b> Quarter turn 75mm lever sink taps        |
| <b>T8904</b> Cross head BS5412 sink deck mixer | <b>T9203</b> Quarter turn 75mm lever sink deck mixer  |
| <b>T8905</b> Cross head BS1010 3/4" sink taps  | <b>T9212</b> Quarter turn 150mm lever sink taps       |
| <b>T9012</b> Standard BS5412 sink taps         | <b>T9213</b> Quarter turn 150mm lever sink deck mixer |

## Standard Sink Units (continued)

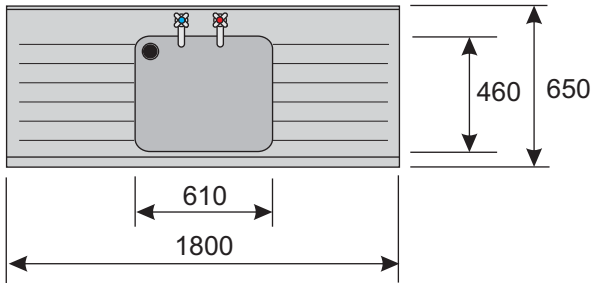

**Standard SBDD Sink Unit**  
**S6318**

**Standard SBDD Sink Top**  
**S6318T** - (sit-on or inset)

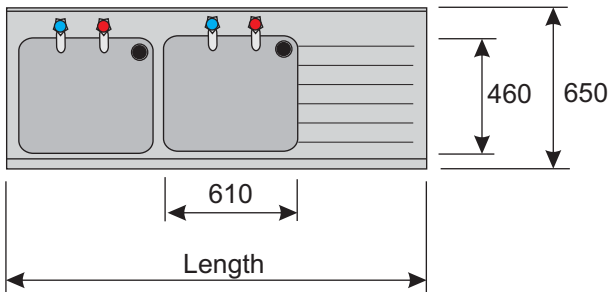

**Standard DBSD Sink Unit**

**S6418** - 1800mm long


**S6424** - 2400mm long

**Standard DBSD Sink Top**

**S6418T** - 1800mm long (sit-on or inset)

**S6424T** - 2400mm long (sit-on or inset)

NB: Left or right hand drainer

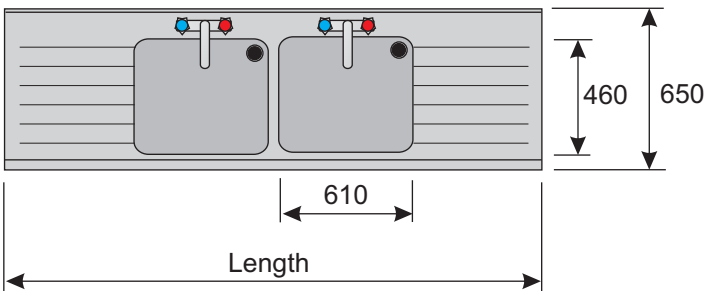

**Standard DBDD Sink Unit**

**S6524** - 2400mm long

**S6530** - 3000mm long

**S6535** - 3500mm long

**Standard DBDD Sink Top**

**S6524T** - 2400mm long (sit-on or inset)

**S6530T** - 3000mm long (sit-on or inset)

**S6535T** - 3500mm long (sit-on or inset)

## Optional Extras



- C6893** Cut out
- U6897** End upstand
- T8903** Cross head BS5412 sink taps
- T8904** Cross head BS5412 sink deck mixer
- T8905** Cross head BS1010 3/4" sink taps
- T9012** Standard BS5412 sink taps

- T9013** Standard BS5412 sink deck mixer
- T9014** Standard BS5412 sink monobloc mixer
- T9202** Quarter turn 75mm lever sink taps
- T9203** Quarter turn 75mm lever sink deck mixer
- T9212** Quarter turn 150mm lever sink taps
- T9213** Quarter turn 150mm lever sink deck mixer

## Large Sink Units


Manufactured from 1.2mm thick grade 304, satin polished stainless steel with 760x510x300mm deep bowls, 38mm standpipe strainer waste, tapholes as required, 30mm square tubular, grade 430 stainless steel stand and adjustable feet (with or without undershelf). Standard overall size can be altered and alternative bowl sizes are available.

Alternative bowl sizes available:  
 400x400x250 deep  
 400x400x300 deep  
 500x400x250 deep  
 500x400x300 deep  
 610x460x250 deep  
 610x460x300 deep  
 760x510x380 deep

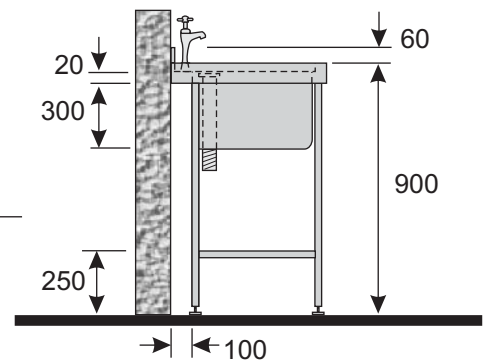


**Large SB Sink Unit**  
**S7017**

**Large SB Sink Top**  
**S7017T - (sit-on or inset)**

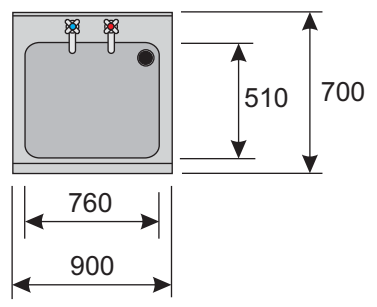


**Large DB Sink Unit**  
**S7115**

**Large DB Sink Top**  
**S7115T - (sit-on or inset)**

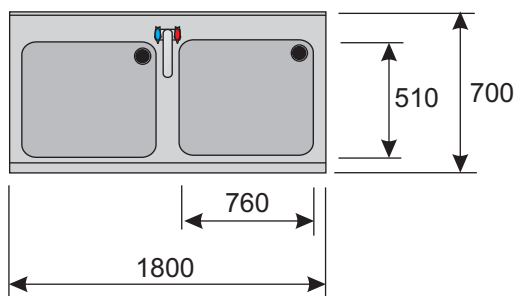

**Large SBSD Sink Unit**  
**S7212 - 1200mm long**  
**S7215 - 1500mm long**  
**S7218 - 1800mm long**

**Large SBSD Sink Top**  
**S7212T - 1200mm long (sit-on or inset)**  
**S7215T - 1500mm long (sit-on or inset)**  
**S7218T - 1800mm long (sit-on or inset)**

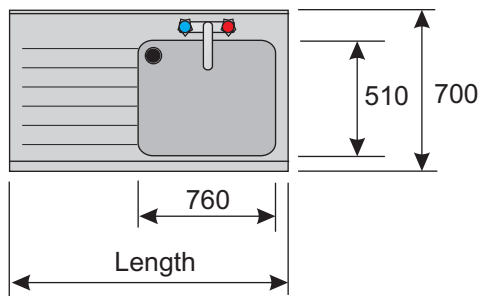


NB: left or right hand drainer

## Optional Extras

- |  |   |
|--|---|
| <b>C6893</b> Cut out                           | <b>T9013</b> Standard BS5412 sink deck mixer          |
| <b>U6897</b> End upstand                       | <b>T9014</b> Standard BS5412 sink monobloc mixer      |
| <b>T8903</b> Cross head BS5412 sink taps       | <b>T9202</b> Quarter turn 75mm lever sink taps        |
| <b>T8904</b> Cross head BS5412 sink deck mixer | <b>T9203</b> Quarter turn 75mm lever sink deck mixer  |
| <b>T8905</b> Cross head BS1010 3/4" sink taps  | <b>T9212</b> Quarter turn 150mm lever sink taps       |
| <b>T9012</b> Standard BS5412 sink taps         | <b>T9213</b> Quarter turn 150mm lever sink deck mixer |

## Large Sink Units (continued)

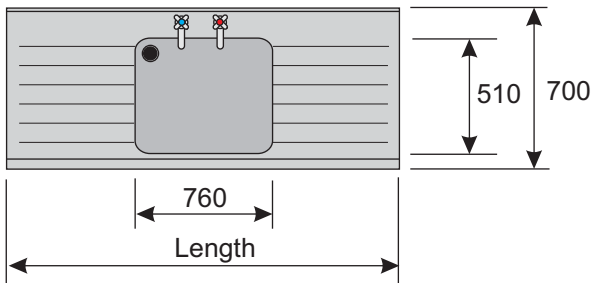

### Large SBDD Sink Unit


7318 - 1800mm long

7324 - 2400mm long

### Standard SBDD Sink Top

7318T - 1800mm long (sit-on or inset)

7324T - 2400mm long (sit-on or inset)

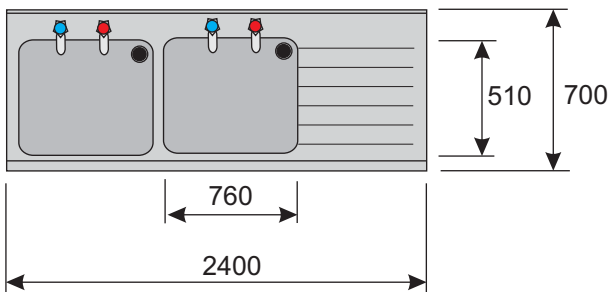


### Large DBSD Sink Unit

S7424 - 2400mm long

### Large DBSD Sink Top

S7424T - 2400mm long (sit-on or inset)

NB: Left or right hand drainer

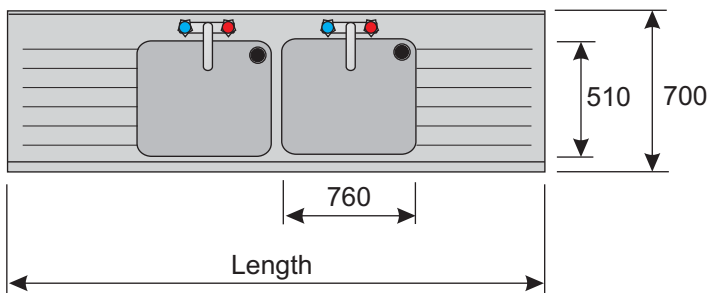

### Large DBDD Sink Unit

S7530 - 3000mm long

S7535 - 3500mm long

### Large DBDD Sink Top

S7530T - 3000mm long (sit-on or inset)

S7535T - 3500mm long (sit-on or inset)




## Optional Extras

- C6893** Cut out
- U6897** End upstand
- T8903** Cross head BS5412 sink taps
- T8904** Cross head BS5412 sink deck mixer
- T8905** Cross head BS1010 3/4" sink taps
- T9012** Standard BS5412 sink taps


- T9013** Standard BS5412 sink deck mixer
- T9014** Standard BS5412 sink monobloc mixer
- T9202** Quarter turn 75mm lever sink taps
- T9203** Quarter turn 75mm lever sink deck mixer
- T9212** Quarter turn 150mm lever sink taps
- T9213** Quarter turn 150mm lever sink deck mixer

## Hot Rinse Sink Units

Manufactured from 1.2mm thick grade 304, satin polished stainless steel with 38mm standpipe strainer waste assembly in the washbowl, tapholes as required and 30mm square tubular, grade 430 stainless steel stand and adjustable feet with or without shelf under the sinkbowl. The insulated heated bowl has an insulated lid, 38mm waste with lever operated drain valve, removable trivet over immersion heater and thermostat, which require a 220/240v 50hz single phase supply via a fused spur.

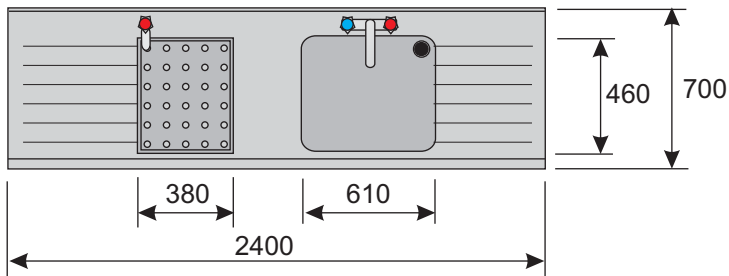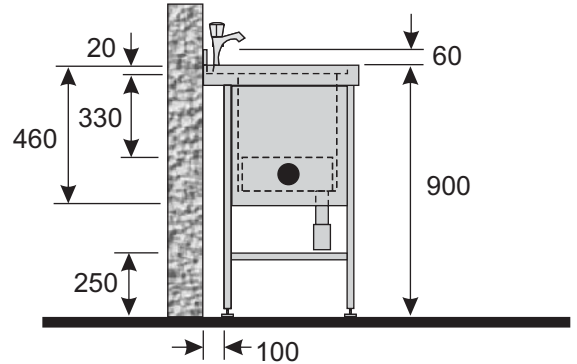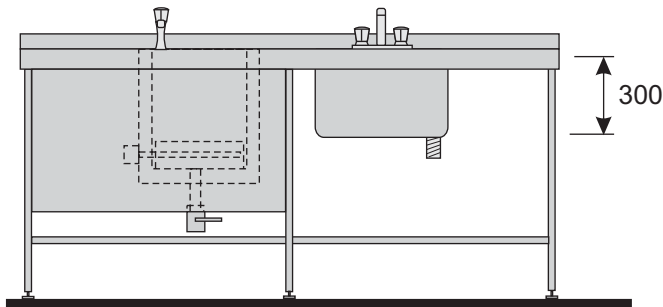

**S6624 - Standard Hot Rinse Sink Unit**  
with 4kw immersion heater, requiring a 20amp fused spur.

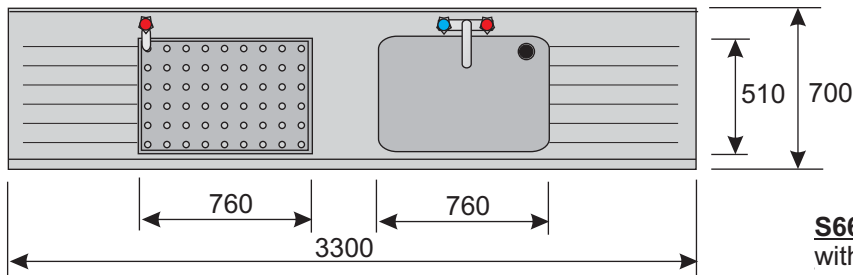


**S6633 - Large Hot Rinse Sink Unit**  
with 6kw immersion heater, requiring a 30amp fused spur.

## Optional Extras



- |  |   |
|--|---|
| <b>C6893</b> Cut out                           | <b>T9013</b> Standard BS5412 sink deck mixer          |
| <b>U6897</b> End upstand                       | <b>T9014</b> Standard BS5412 sink monobloc mixer      |
| <b>T8903</b> Cross head BS5412 sink taps       | <b>T9202</b> Quarter turn 75mm lever sink taps        |
| <b>T8904</b> Cross head BS5412 sink deck mixer | <b>T9203</b> Quarter turn 75mm lever sink deck mixer  |
| <b>T8905</b> Cross head BS1010 3/4" sink taps  | <b>T9212</b> Quarter turn 150mm lever sink taps       |
| <b>T9012</b> Standard BS5412 sink taps         | <b>T9213</b> Quarter turn 150mm lever sink deck mixer |

## Tables


Manufactured from 1.2mm thick grade 304, satin polished stainless steel, supplied with 30mm square tubular grade 430 stainless steel stand with adjustable feet and undershelf. Available in any length up to 2875mm. Standard width and height can be altered.

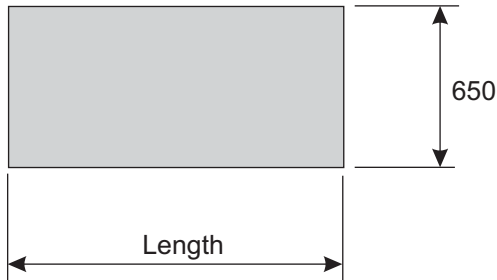

**T66 - Centre table**

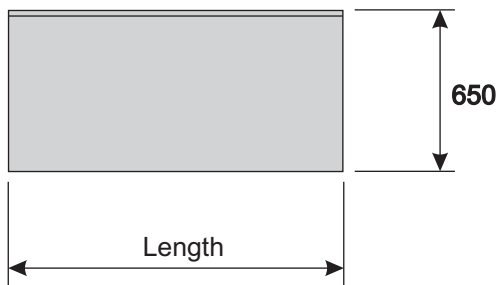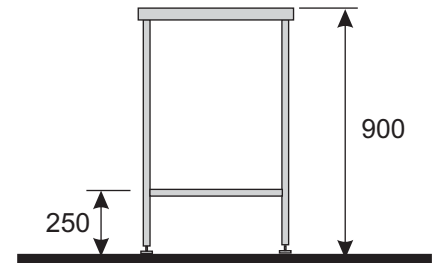


**T67 - Wall table**


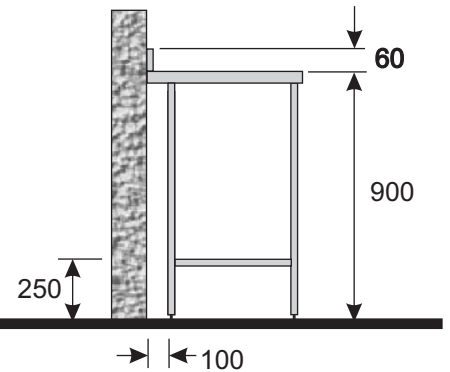


## Shelves


Manufactured from 1.2mm thick grade 430, satin polished stainless steel, supplied with brackets. Wall shelves are available in any length up to 2875mm and the standard width can be altered.

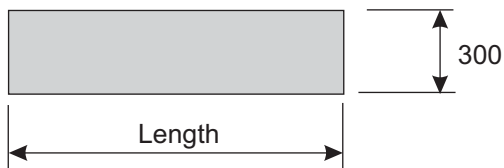

**W75 - Wall shelf**

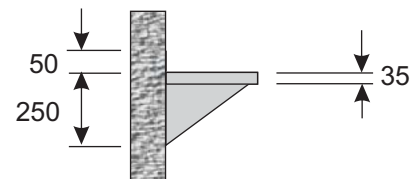

**M0166 - Microwave shelf**  
(available in any size, to suit the Microwave)



## Optional Extras


- S6892** Additional strengthening (for machines etc.)
- D6894** Drawer
- D6895** Drawer with lock
- C5599** Four standard duty castors (two braked)
- C5597** Four heavy duty castors (two braked)

- D6898** Additional undershelf
- C6893** Cut out
- C8390** Mitred corner
- U6897** End upstand



## C70 - Floor Cupboard (ambient - no doors)

## C71 - Floor Cupboard (with sliding or hinged doors)

Manufactured from 1.2mm thick grade 304, satin polished stainless steel, supplied with or without sliding or hinged doors, 30mm square tubular grade 430 stainless steel frame, adjustable feet and intermediate shelf. Available in any length, from 600 to 2400mm. Standard width and height, can be altered.

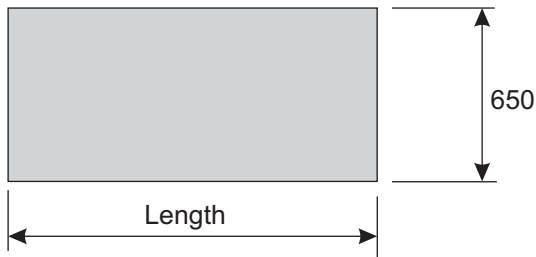




Also available for fitting under a Catering Sink Top:  
**C74 - Sink Cupboard (ambient - no doors)**  
**C75 - Sink Cupboard (with sliding or hinged doors)**

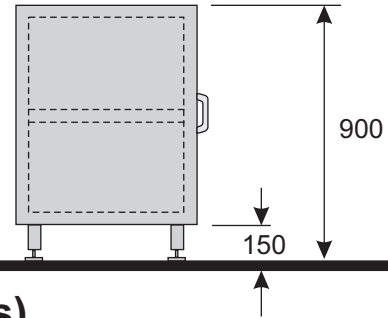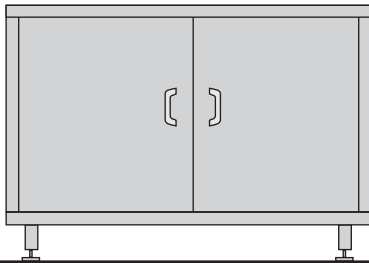

## C72 - Wall Cupboard (ambient - no doors)

## C73 - Wall Cupboard (with sliding or hinged doors)

Manufactured from 1.2mm thick grade 304, satin polished stainless steel, supplied with or without sliding or hinged doors, 30mm square tubular grade 430 stainless steel frame and intermediate shelf. Available in any length, from 600 to 1500mm. Standard width and height, can be altered.

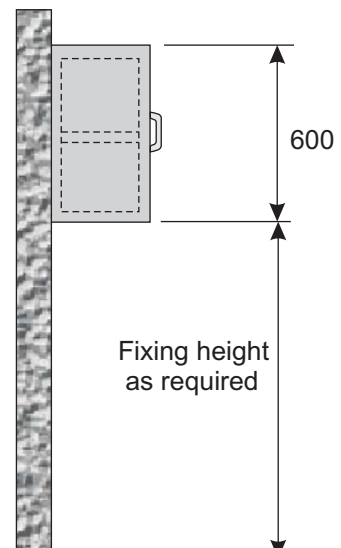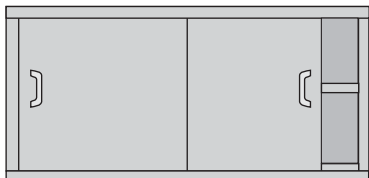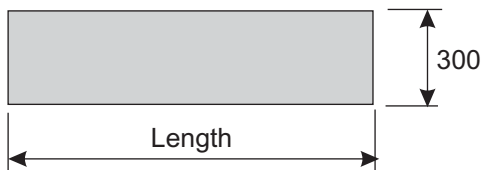


## Optional Extras

**L7499** Hinged or sliding door lock  
**S6898** Additional shelf

**C5599** Four standard duty castors (two with brake)  
**C5597** Four heavy duty castors (two with brake)


## A8601 - Non-touch Hand Drier

Manufactured from 1.2mm thick grade 304, satin polished stainless steel. It has a capacitor start, brushless motor, centrifugal fan and fully-supported, spiral wound, heating element, rated at 2.4kW with automatic re-set overload protection and is automatically operated by an infra-red sensor and associated circuitry with automatic safety cut-out after 70 seconds continuous running. Supply should be 220/240V, 50Hz, single phase and the hand drier connected to the final subcircuit via a double-pole isolator switch, fused at 13A.

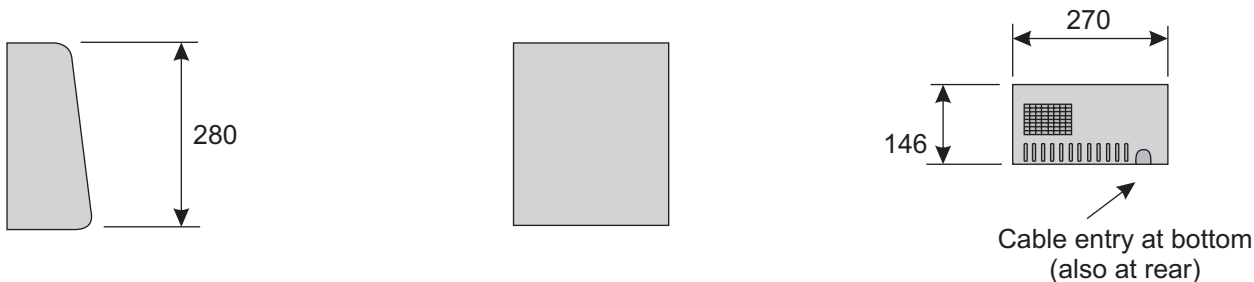


## A8602 - Paper Towel Dispenser

Manufactured from 0.76mm thick grade 304, satin polished stainless steel with a lockable, bottom-hinged front, that swings open fully for easy servicing and dispenses 300 to 500, multi-fold or C-fold paper towels.

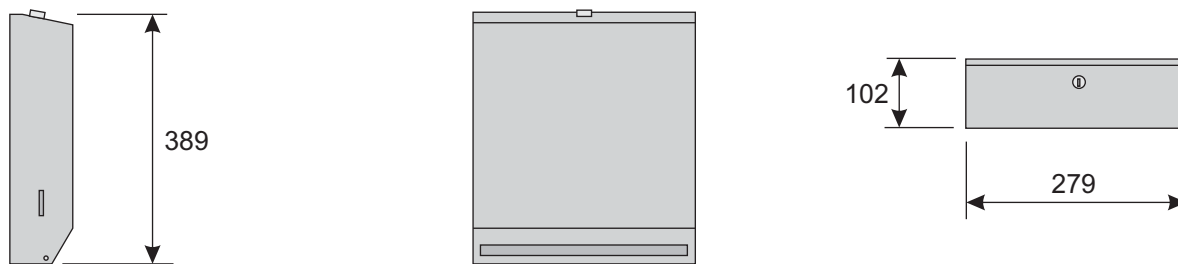


## A8609 - Waste Bin

Manufactured from 0.76mm thick grade 304, satin polished stainless steel. **A8610** with hinged lid is also available.

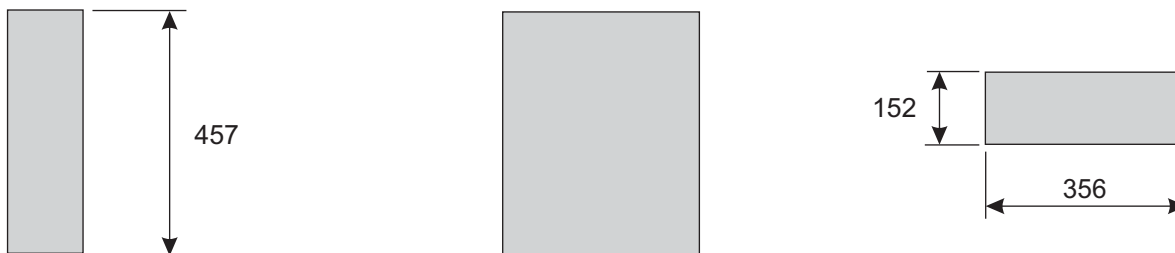


## A8616 - Napkin Disposal Bin

Manufactured from 0.76mm thick grade 304, satin polished stainless steel with a hinged lid and lockable, hinged bottom for easy servicing (removal of liner).

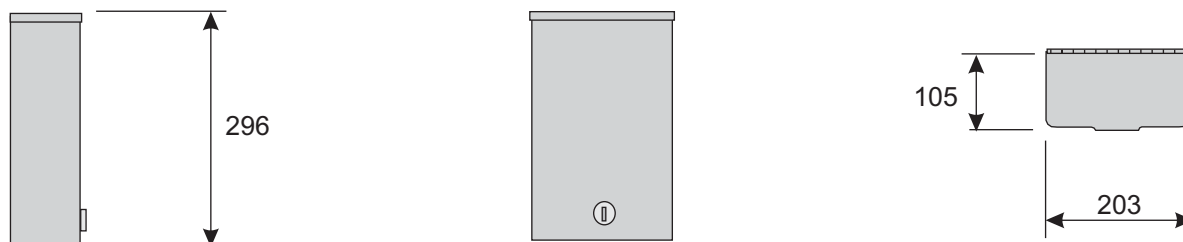


## A8613 - Mini Jumbo Toilet Roll Holder

Manufactured from 0.76mm thick grade 304, satin polished stainless steel with a lockable, removable, front cover for easy servicing. A 220mm pack gives 300m single sheet or 210m double sheet.

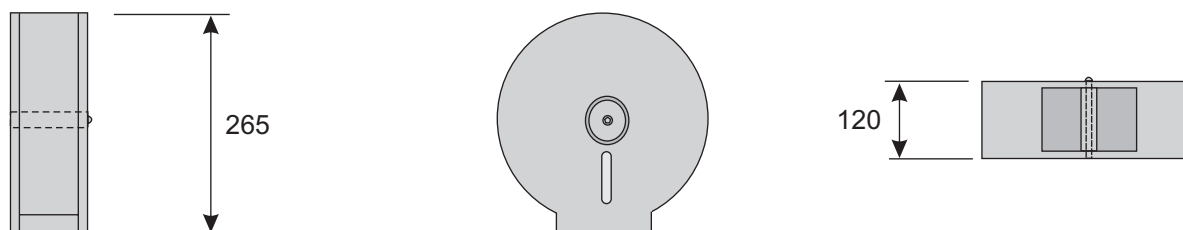


## A8615 - Double Toilet Roll Holder

Manufactured from 0.76mm thick grade 304, satin polished stainless steel with a lockable, front cover for easy servicing. Holds two 114x114 standard core toilet rolls. **A8615R** recessed model is also available.

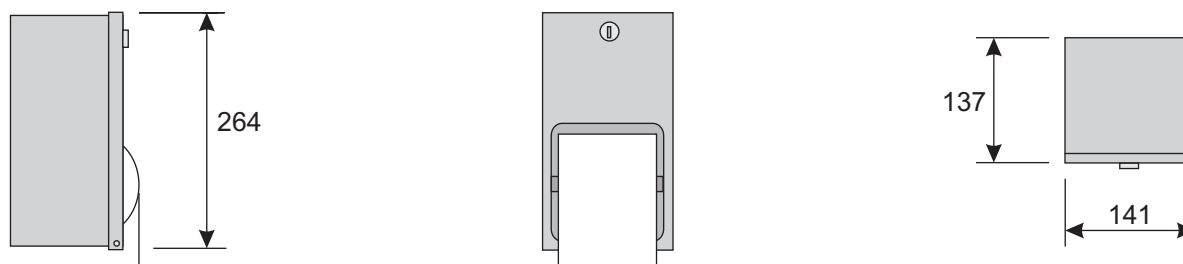


## A8606 - Toilet Tissue Dispenser

Manufactured from 0.76mm thick grade 304, satin polished stainless steel with a lockable, bottom-hinged front, that swings open fully for easy servicing.

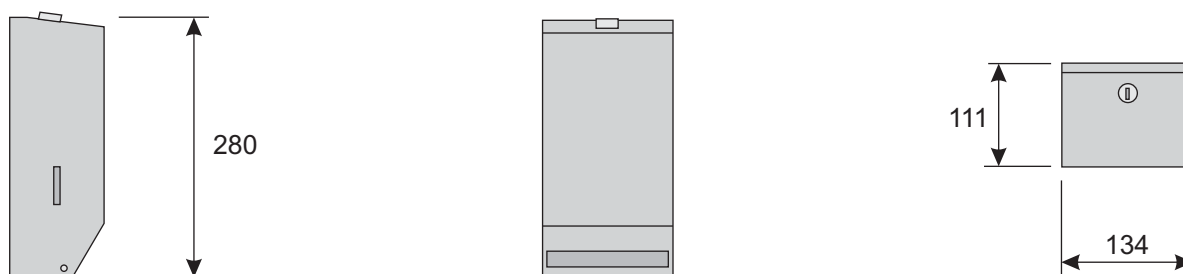



## A8603 - Liquid Soap Dispenser

Manufactured from 0.91mm thick grade 304, satin polished stainless steel with a chromium-plated brass valve (with stainless steel moving parts), key-operated filler cap, lexan level indicator and 1.2 litre capacity. An **A8603V** vertical model is also available.

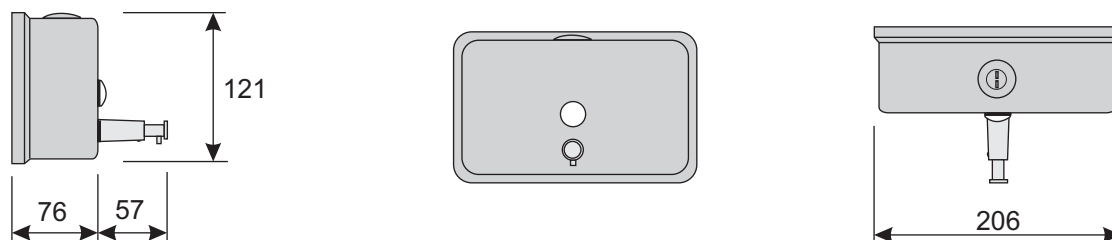


## A8611 - Liquid Soap Dispenser

Manufactured from chromium-plated brass (with stainless steel moving parts), designed for top filling, with a 0.5 litre polyethylene container. A 25mm hole is required for installation through a maximum mounting thickness of 102mm.




## A8607 - Soap Shelf

Manufactured from 0.91mm thick grade 304, satin polished stainless steel with concealed fixings.

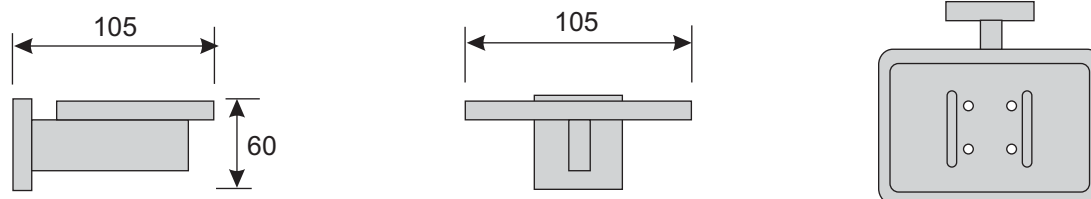

## Robe Hooks

Manufactured from 0.91mm thick grade 304, satin polished stainless steel with concealed fixings..

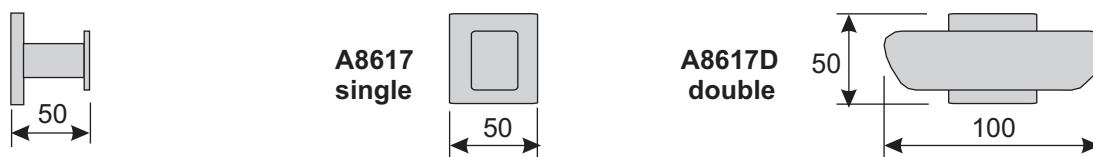

## Stainless Steel Mirrors


Manufactured from 1.2mm thick grade 304, mirror polished stainless steel with four fixing holes. Please ensure the mirrors are fixed to a flat surface, or distortion will occur. Any size is available on request.

## Standard Grab Rails

Manufactured from 35mm diameter, 1.2mm thick, grade 304, bright polished stainless steel tube with 1.5mm thick fixed flanges. Alternative sizes, available on request.





- G8801** - 300mm long
- G8802** - 450mm long
- G8803** - 600mm long
- G8804** - 750mm long
- G8805** - 900mm long

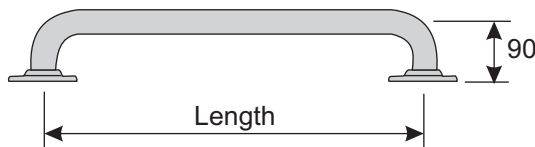



## G8806 - Angled Grab Rail

Manufactured from 35mm diameter, 1.2mm thick, grade 304, bright polished stainless steel tube with 2mm thick fixed flanges. Alternative sizes, available on request.

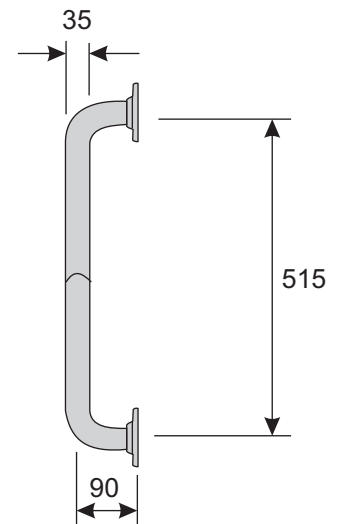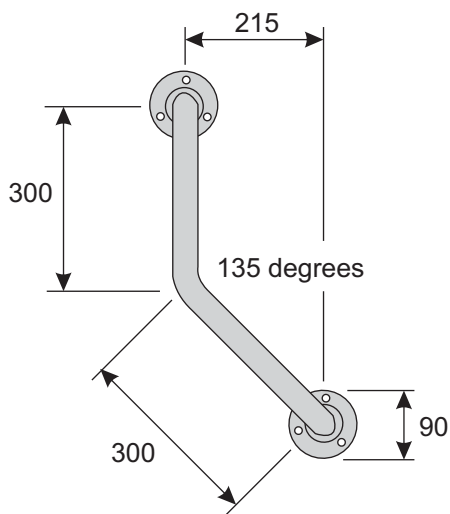

## G8808 - Padded Backrest


Manufactured from 35mm diameter, 1.2mm thick, grade 304, bright polished stainless steel tube with 1.5mm thick fixed flanges and white plastic upholstered, foam pad.

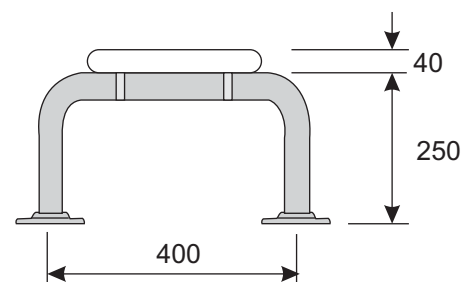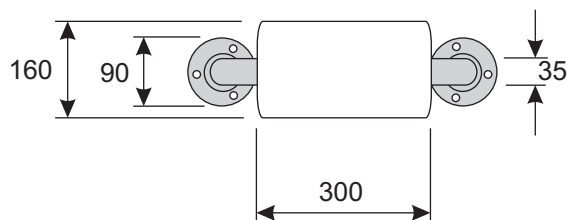

## G8809 - Hingedown Grab Rail

## G8810 - Hingedown Grab Rail (with toilet roll holder)

Manufactured from 35mm diameter, 1.2mm thick, grade 304, bright polished stainless steel tube with 2mm thick fixed flanges.

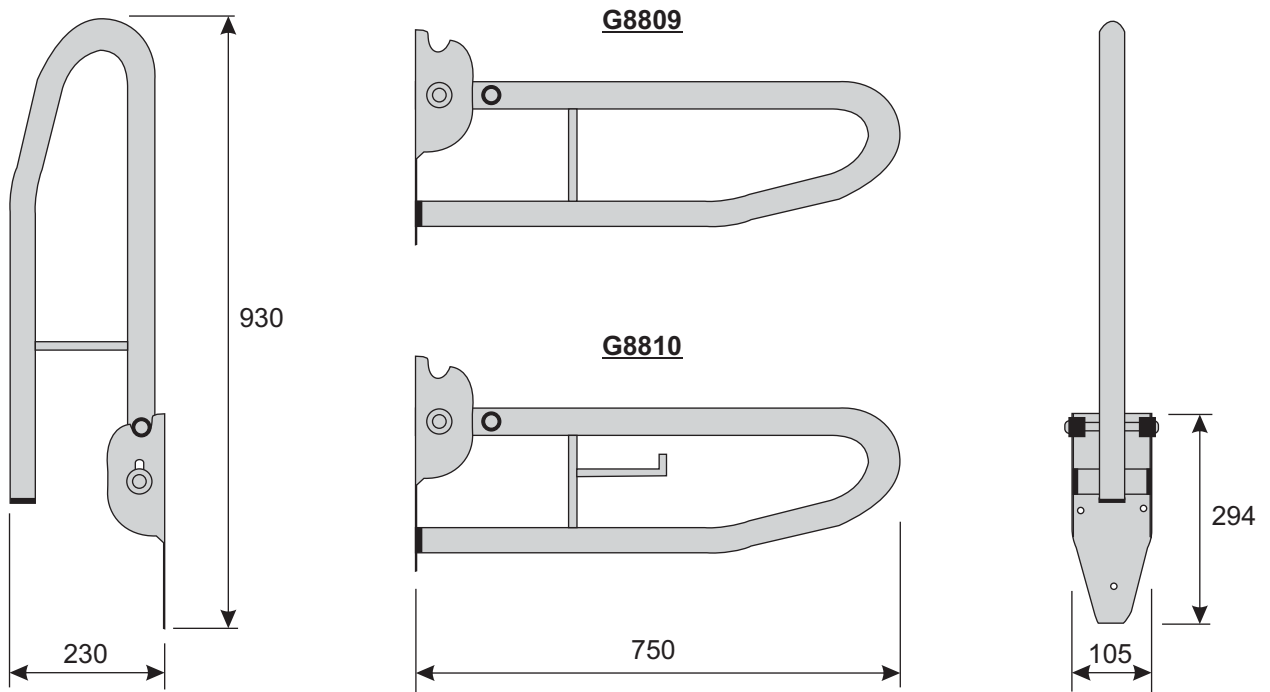

## G8811 - Vertical Pole

## G8812 - Vertical Pole and Stay

Manufactured from 35mm diameter, 1.2mm thick, grade 304, bright polished stainless steel tube with 1.5mm thick fixed flanges. Alternative sizes, available on request.

