



W13 - Contract Washtrough

Manufactured from 1.2mm thick grade 304, satin polished stainless steel, supplied with brackets and 38mm plastic grated waste (in a left, right or central position). Suitable for use with wall-mounted taps, using pre-mixed water. Available in any length, up to 3000mm, allowing approximately 600mm per person.

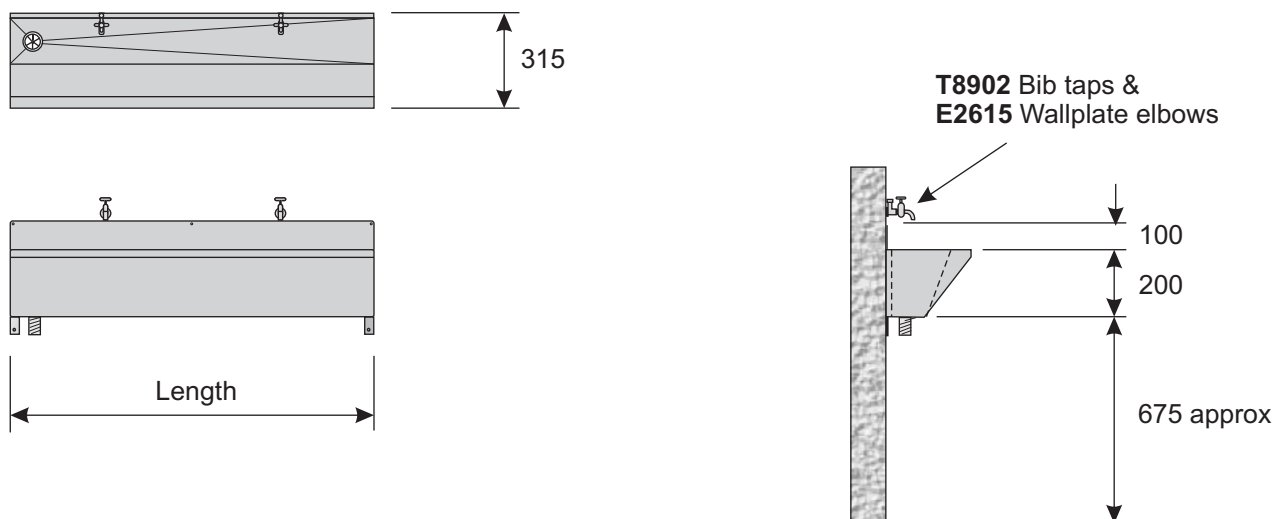

W14 - Taplanding Washtrough

Manufactured from 1.2mm thick grade 304, satin polished stainless steel, supplied with brackets and 38mm plastic grated waste (in a left, right or central position). Suitable for use with deck-mounted taps or spouts, using pre-mixed water. Available in any length, up to 3000mm, allowing approximately 600mm per person.

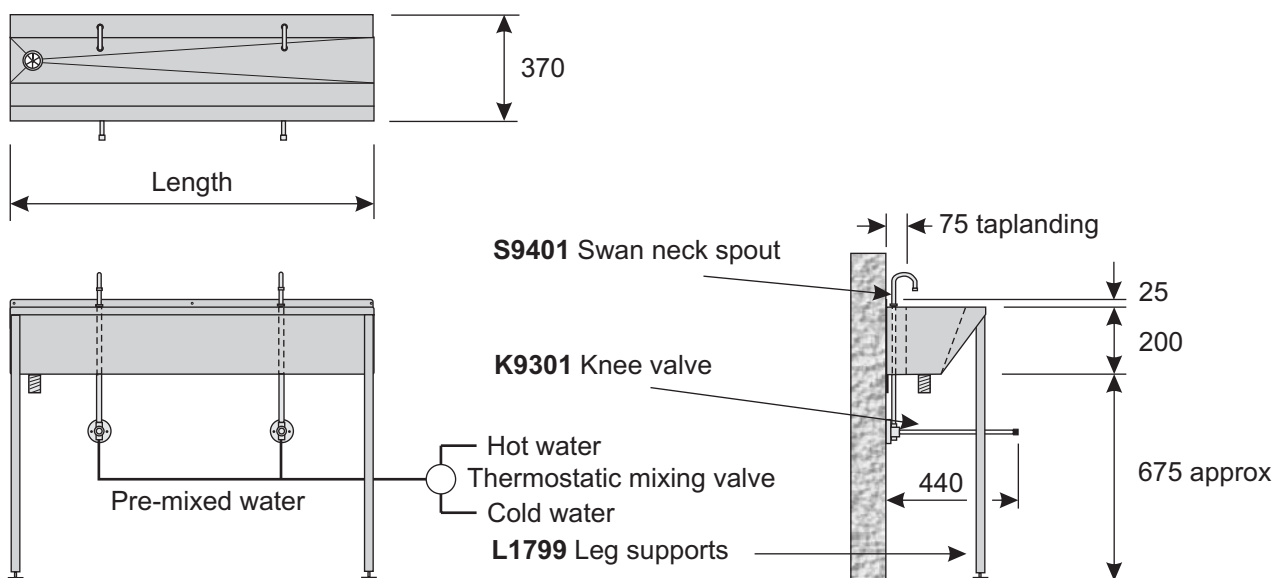


Optional Extras

- | | | | |
|--------------|--------------------------------|--------------|---|
| S17 | Loose splashback 300mm high | K9301 | Knee operated valve - wall-mounted with 20 second timed delay |
| L1799 | Stainless steel leg supports | K9302 | Knee operated valve - frame mounted, non concussive |
| T8902 | Cross head BS5412 bib tap | F9304 | Foot operated valve - non concussive |
| E2615 | Wallplate elbow | | |
| S9401 | Swan neck spout | | |
| T9622 | Thermostatic mixing valve 22mm | | |


W15 - Splashback Washtrough

Manufactured from 1.2mm thick grade 304, satin polished stainless steel, supplied with brackets and 38mm plastic grated waste (in a left, right or central position). Suitable for use with bib spouts, using pre-mixed water. Available in any length, up to 3000mm, allowing approximately 600mm per person.

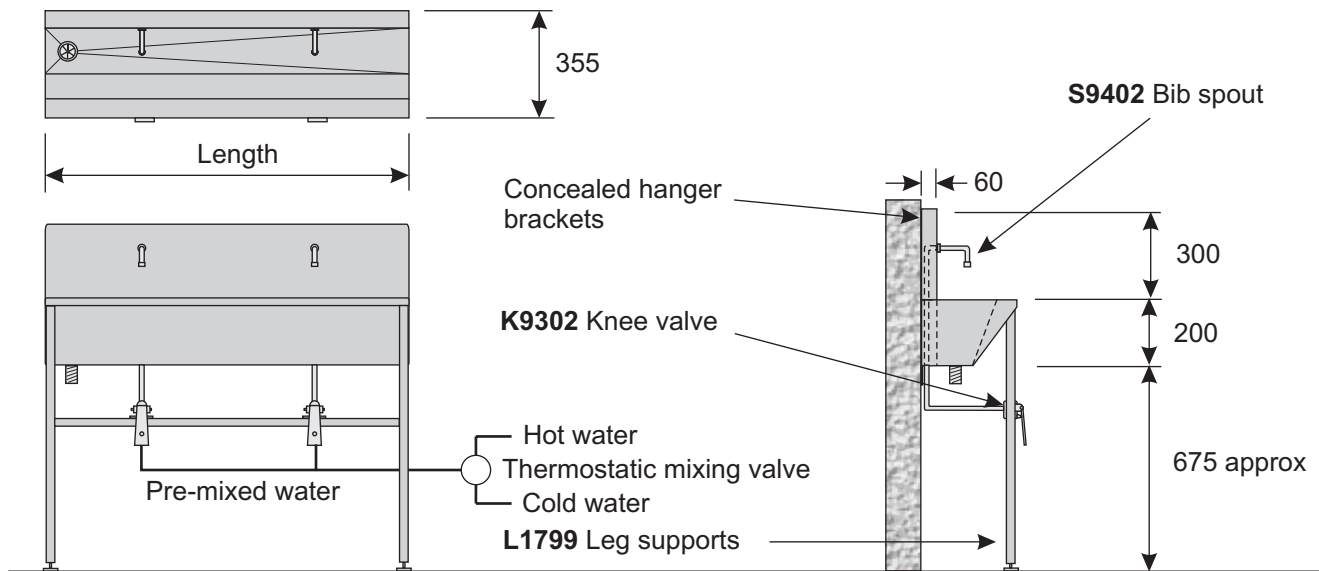

W16 - Island Washtrough

Manufactured from 1.2mm thick grade 304, satin polished stainless steel, supplied with 30mm square tubular stainless steel stand and 38mm plastic grated waste (in a left, right or central position). Suitable for use with deck-mounted taps or spouts, using pre-mixed water. Available in any length, up to 3000mm, allowing approximately 600mm per person.

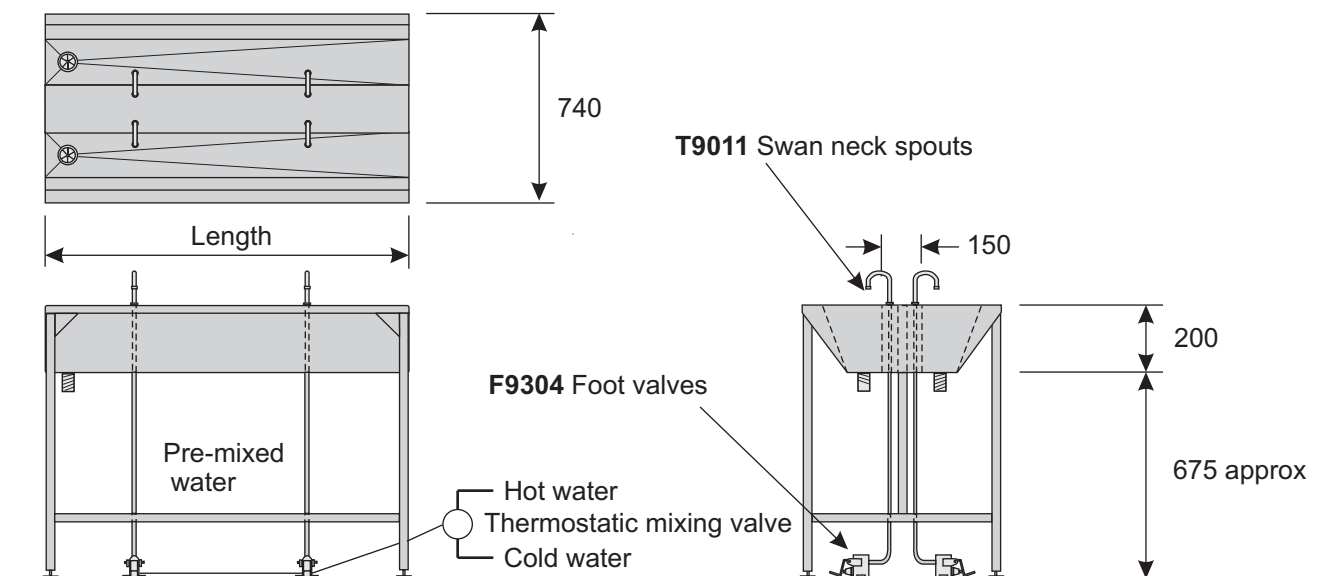

Optional Extras

S17	Central splashback 300mm high	K9301	Knee operated valve - wall-mounted with 20 second delay
L1799	Stainless steel leg supports	K9302	Knee operated valve - frame mounted, non concussive
S9401	Swan neck spout	F9304	Foot operated valve - non concussive
S9402	Bib spout		
T9622	Thermostatic mixing valve 22mm		